<table>
<tr><th>S.NO</th><th>Parameters</th><th>Description</th><th>Remark</th></tr>
<tr><td></td><td></td><td></td><td></td></tr>
<tr><td>1</td><td>Application</td><td>Box Gluing & folding system
Box size
1. 300x220x50
2. 340x220x50</td><td></td></tr>
<tr><td>2</td><td>Packing system & Its Basic Features</td><td>Basic design Features.
1. Component touching surfaces will be made in S.S. 304.
2. Structure will be powder coated/ Chrome plating
3. Design of structure is modular which can be dismantled and assembled.
4. Pneumatic cylinders, motors & sensors are used for automation.

Design Components:

<table>
<tr><th>S.no</th><th>Component</th><th>Application</th></tr>
<tr><td>1.</td><td>Main Cinveyor</td><td>1. Chain conveyor with Component touching surfaces will be in S.S.
2. stop & flow type to meet the requirement of 50 to60 box / min</td></tr>
<tr><td>2.</td><td>Carton Erector system</td><td>Release cartons from unfolding to box folding.</td></tr>
<tr><td>3.</td><td>Box Holding brackets</td><td>Box holding brackets to hold unfolded boxes</td></tr>
<tr><td>4.</td><td>Bottom flat & gummed station</td><td>All touching parts in S.S. 304, Pneumatic/ motor system for gluing & folding.</td></tr>
<tr><td>5..</td><td>Box Packing Automation</td><td>Many combination of levers operated by motor & pneumatic is used to seal box down the line.</td></tr>
<tr><td>6.</td><td>Exit conveyor</td><td>Food grade belt conveyor is used to unload packed box.</td></tr>
<tr><td></td><td></td><td></td></tr>
</table>
</td><td></td></tr>
<tr><td>6</td><td>Control Panel & Its Basic Features</td><td>Cabinet:
1. Main control panel : Floor mounted cabinet
2. S.S.304
Approx size: 1000(L) X 700(W) X 1000(H)


Switch Gear:
1. Main Isolation through MCCB.
2. Interlocks through main contractor
Junction box:</td><td></td></tr>
</table>

<table>
<tr><td></td><td></td><td>Cabinet cooling : Fans are provided for cabinet cooling</td><td></td></tr>
<tr><td></td><td>PLC & Automation</td><td>1. Delta PLC is used for automation control.
2. 5” HMI for Control input & alarm display</td><td></td></tr>
<tr><td></td><td>Components & Make list.</td><td>Only reputed bought-out components are used. The price is worked out on the basis of make list provided. Any other makes other than this should be mentioned prior to order so than final price & delivery schedule can be concluded.

<table>
<tr><th>Components</th><th>Make</th></tr>
<tr><td>Control Panel Cabinet</td><td>S.S.304</td></tr>
<tr><td></td><td></td></tr>
<tr><td></td><td></td></tr>
<tr><td>MCB</td><td>Siemens</td></tr>
<tr><td>Indicator Lamps, selector switch & push buttons</td><td>Technik</td></tr>
<tr><td>Wires inside control Panel</td><td>Finolex / Polycab</td></tr>
<tr><td>Terminals in control panel</td><td>Connectwel/ Wago</td></tr>
<tr><td>PLC</td><td>Delta</td></tr>
<tr><td>HMI</td><td>5” HMI, Delta</td></tr>
<tr><td>Isolation Transformer</td><td>NANAP/AE</td></tr>
<tr><td>Relay</td><td>Omron/ Phoenix</td></tr>
<tr><td>Cooling Fans</td><td>Sunon</td></tr>
<tr><td>VFD</td><td>Delta</td></tr>
<tr><td>Power Supply</td><td>Omron</td></tr>
</table></td><td></td></tr>
<tr><td></td><td>Cables & its Scope of supply</td><td>Customer’s scope:
1. All Cables from control panel to terminal box will be in Customers scope.
Supplier’s Scope:
2. Cables from terminal box to system maximum up to 4mts will be provided.
Cable schedule will be provided after order finalization.</td><td></td></tr>
<tr><td>7</td><td>Final Testing</td><td>Final Pre dispatch inspection will be offered. this will be done on the basis of Validation sheet mutually agreed at the time of GA approval</td><td></td></tr>
<tr><td>8</td><td>Delivery schedule</td><td>The delivery schedule begins after the receipt of order.
Delivery will be 4-6 weeks.</td><td></td></tr>
<tr><td>9</td><td>Documentation</td><td>1. All G.A. Drawings & validation sheet will be provided.
2. Electrical diagrams and mechanical diagrams will be as per DIN standards.
3. Two sets of hard copy of operating manual will be provided at the time of dispatch.</td><td></td></tr>
<tr><td>10</td><td>Packing & Transportation</td><td>Packing: customer scope
Transportation scope</td><td></td></tr>
</table>

11	**Installation and Commissioning & Training**	**Separate quotation will be provided.** Our commissioning Engineer will explain entire control panel functionalities and the manual. This may take about 1-2 days	
12	**Warranty**	The equipment is guaranteed against any manufacturing defects for a period of 12 months from the date of control panel commissioning or 16 months from the date of delivery.	
13	**Exclusion from warranty**	1. The warranty does not cover normal wear and tear. 2. Defects arising out of breakage and mishandling are excluded from this warranty.	
14	**Post warranty Service**	We recommend our AMC (Annual Maintenance Contract) service after warranty period.	

	Total Amount for the Design, Manufacturing & Assembly, Testing. Without triangle folding station.	**6,86,000 + 18% GST** **(Without triangle folding station)**
	Cost of triangle folding station	**30,000 (ex tax)**
	Six lack eighty six Thousand Only.	
This Quotation is valid for 6 month only.		

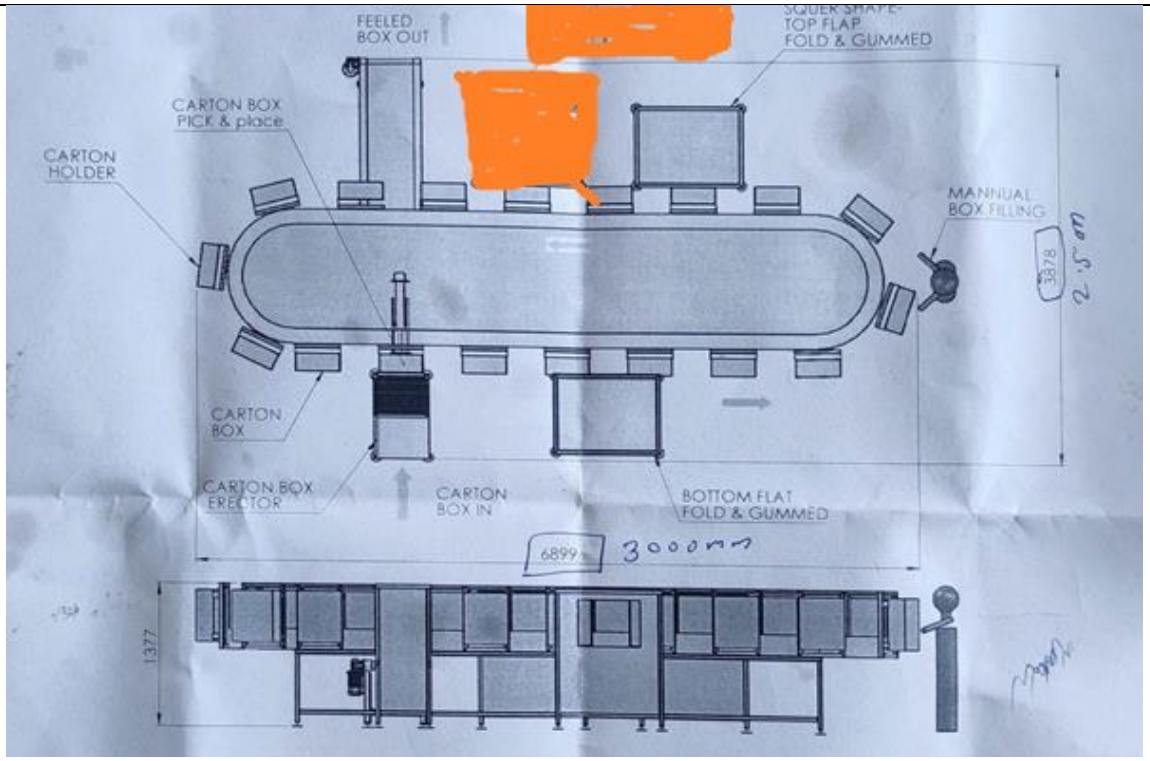

Heat-EN Infrared Heating Systems Pvt Ltd
Gate no: 155,opp Ashok Leyland
Chimbli Phata, Kuruli, Talkhed, Pune,
Maharashtra 410501
sales@heaten.in
Ph: 8983410515
8983410515
GST NO: 09AAFCH6107H1ZM