NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

MMC Doortech
Chennai

Date : 04.01.2021
Quote NO : SQT.20.21.2928
Kind Attn : Miss. Mahalasmi R
Email Id : jollybanerji@gmail.com
Contact No: 9884082122

Project Name & Location:

Subject : Quotation for Automatic Fire Curtain

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**KENT make Automatic Fire Curtain AFC03S-690 VWG690**	3730	4000	1	340,833	340,833	15,000	15,000
	KENT make Automatic Fire Curtain AFC03S-690 VWG690	3070	3635	1	316,244	316,244	15,000	15,000
	KENT make Automatic Fire Curtain AFC03S-690 VWG690	3760	3570	1	330,000	330,000	15,000	15,000
	KENT make Automatic Fire Curtain AFC03S-690 VWG690	3065	4000	1	326,000	326,000	15,000	15,000
	KENT make Automatic Fire Curtain AFC03S-690 VWG690	3750	3765	1	337,600	337,600	15,000	15,000
	KENT make Automatic Fire Curtain AFC03S-690 VWG690	3075	4000	1	326,000	326,000	15,000	15,000
				Total		**1,976,677**		**90,000**
2	P&F Charges			3%		**59,300**		
	Total Without Taxes					**2,035,977**		**90,000**
	GST Extra @ 18%			18%		366,476		16,200
	Total With Taxes					**2,402,453**		**106,200**
3	Transportation Charges					**Extra at Actual**		
4	Unloading Charges @ Site					**Client Scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Automatic Fire Curtain

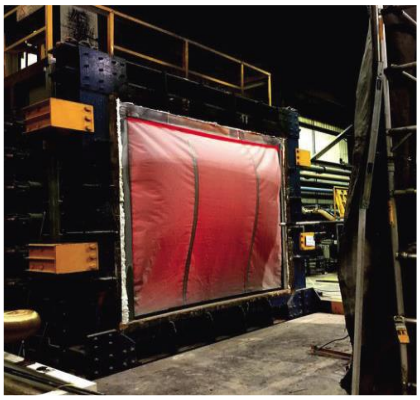

Sr. No	Description	Specification
1	Mounting Location area	Inside area / Outside area
2	Model	AFC03S-690 VWG690 Fabric - 76 mm Dia Roller - Tested Under UL Standard
3	Thickness	0.71 mm
4	Base Fabric Weight	640g/m2
5	Coated fabric weight	690g/m2
6	Base Fabric Yarn (Warp)	EC9-136 EC9 68x2 ÷ IV1
7	Base Fabric Yarn (Weft)	EC9-136 EC9 68x2 ÷ IV1
8	Thread Count (Wrap)	16 per 1cm
9	Thread Count (Weft)	15.3 per 1 cm
10	Coated Side	Both Side
11	Thread	Stainless Steel
12	Standard Color	Grey
13	Coated Fabric Tensile Strength (Wrap)	500 N/cm
14	Coated Fabric Tensile Strength (Weft)	450 N/cm
15	Weave	8 Shaft Satin
16	BS 476 Pt 6 & Pt 7	Class 0
17	EN 13501-1	A2.s1.d0 & BG Nr. 119.112
18	Fire Resistance Standard	BS EN 1634-1:2014 (Fire Resistance)
19	Smoke Resistance	BS EN 1634-3:2014 (Smoke Control Test)
20	FIRE INTEGRITY (E)	180 minutes

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	
1	Secured and fully covered Store area to keep the material	
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	
3	Electrical Supply on the site single phase/three phase points at different places.	
4	Any civil / masonry/structural work required	
5	All structure support required	
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	
7	Conduits, Cables required	

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 12-14 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% along with confirmed purchase order & Balance before dispatch

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Shrikant Mirkute on 8551098333**

With Best Regards
Smita Khare
9637991333
For NIHVA Technologies Pvt Ltd