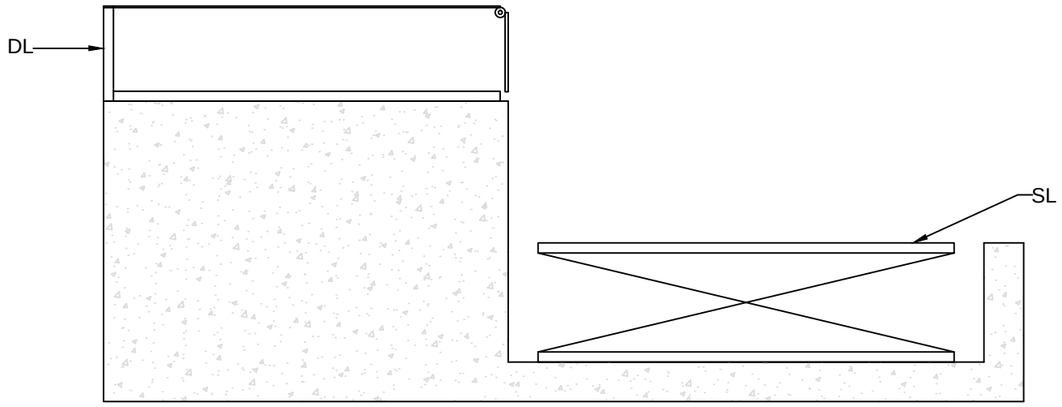

Scissor lift is at resting position

Scissor lift is at resting position		
We can operate Dock leveler at full condition		
1	Deck up	Mandatory: you can not operate the scissor lift at this condition.
2	Lip up	
3	Deck down	
4	Lip down	

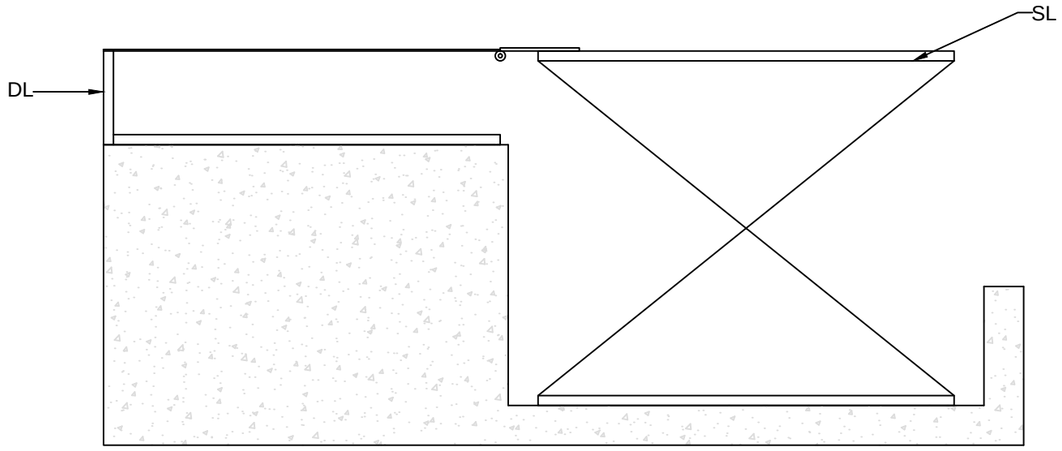

Scissor lift is at maximum height

When Client need to operate the scissor lift.		
1	DL Deck up	Mandatory: you can not operate the scissor lift at this condition.
2	DL Lip up	
3	DL Deck down	
4	SL up till the DL lip	
5	Material unloading	Both SL and DL are locked position.
6	SL down	
7	DL Deck up	Mandatory: you can not operate the scissor lift at this condition.
8	DL Lip down	
9	DL Deck down	

Note:
1. SL should not be operate till the lip of dock leveler is completely open
2. SL should stop when its platform touches the lip of DL by using limit switch

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Interlocking of SL and DL

	NAME	DATE	SIGN.
DRAWN	Ganesh	12/03/22	
CHECK	A.K.	12/03/22	
REV.	00		
APPRD.	V.T.	12/03/22	
MFG			

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT - Shubhashree E+H
PROJECT -SL and DL Interlocking
SITE -Shirur, Pune
DWG. NO. - NIHVA/21-22/CLT/366
SCALE: | WT: | SHEET: 01 OF 01
If any queries contact : design@nihva.com