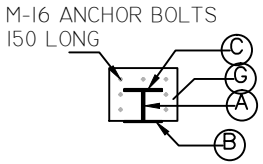

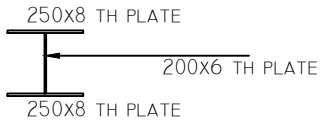

TYPICAL BEAM SECT

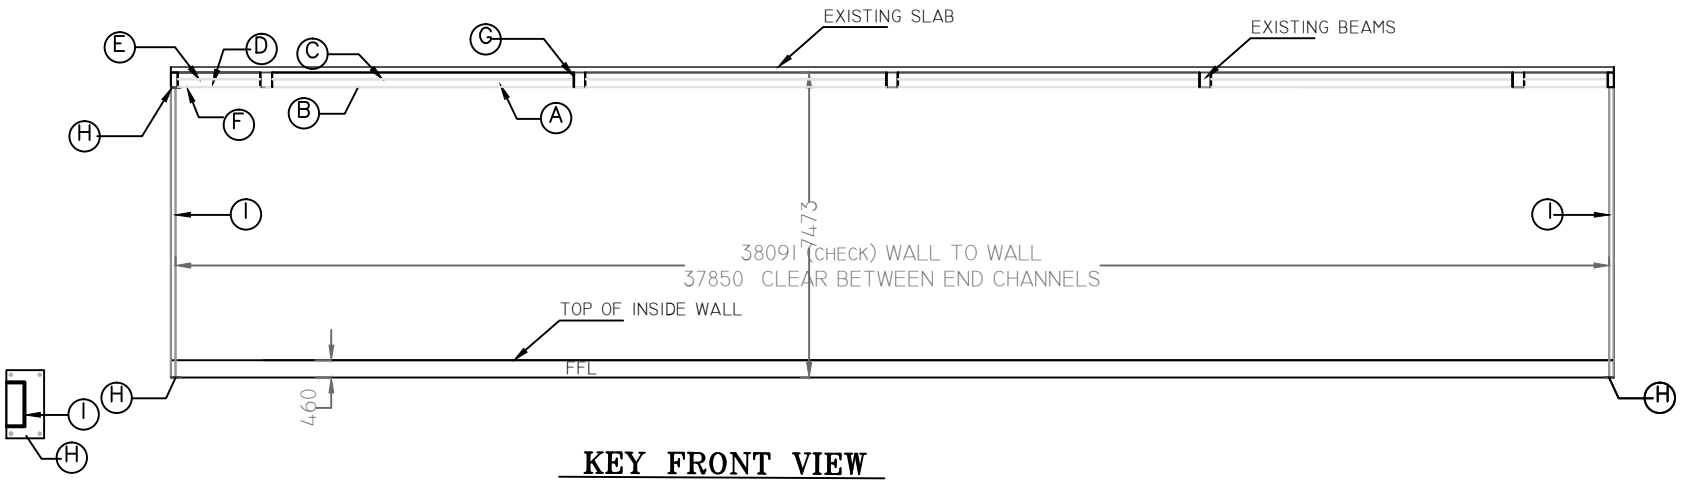

KEY FRONT VIEW

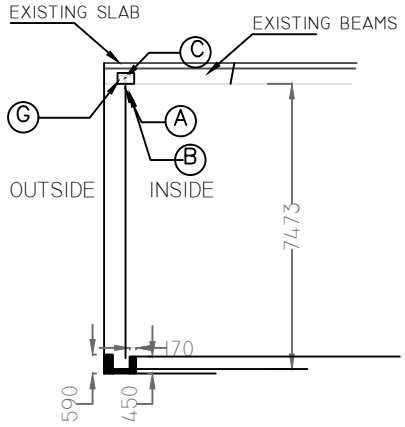

KEY SIDE VIEW

GENERAL NOTES

1* BTM FLANGE TO BE EXTENDED UPTO CENTER OF BEAM
2* BEAM PLASTER WHERE PLATE IS TO BE FIXED TO BE REMOVED
USE STANDARD ANCHOR SOLUTION FOR ANCHORING OF BOLTS
3* THE MEASUREMENTS GIVEN ARE TO BE
CEECKED AND CONFIRMED ON SITE
DO NOT SCALE DRG
ONLY WRITTEN DIMENTIONS TO BE FOLLOWED
IN CASE OF DOUBT PLEASE CONTACT

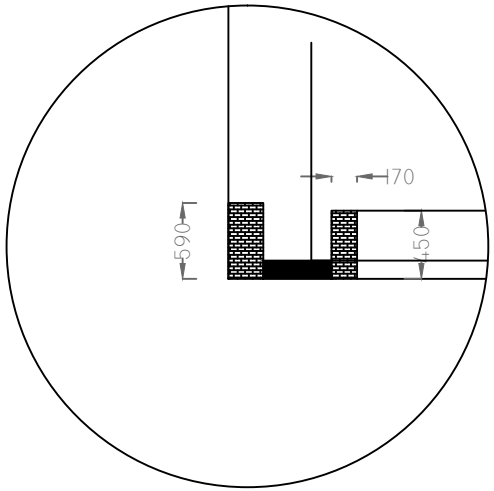

MATERIAL REQD

ALL MAT FE-250 GRADE

A	200X6 TH PLATE (7946 LONG)	4	NO
B	250X8 TH PLATE (7946 LONG)	4	NO
C	250X8 TH PLATE(7946 LONG)	4	NO
D	200X6 TH PLATE(2193 LONG)	2	NO
E	250X8 TH PLATE(2193 LONG)	2	NO
F	250X8 TH PLATE(2193 LONG)	2	NO
G	450X350X12 TH PLATE	12	NO
	M-16 150 LONG BOLTS	84	NO
H	250X450X12 TH PLATE	2	NO
G	ISMC 300 CHANNEL(7473 LONG)	2	NO

ALL WELDING 5 MM TH

5 TH FLOOR

STRUCTURAL SCHEME FOR PROPOSED DOOR AT

OWNER :

CONTRACTOR:

JOB NO GAPR2016	DRG NO 1. 25-04-2016
FILE NO.GAPR2016	REV: 2 09-06-2016