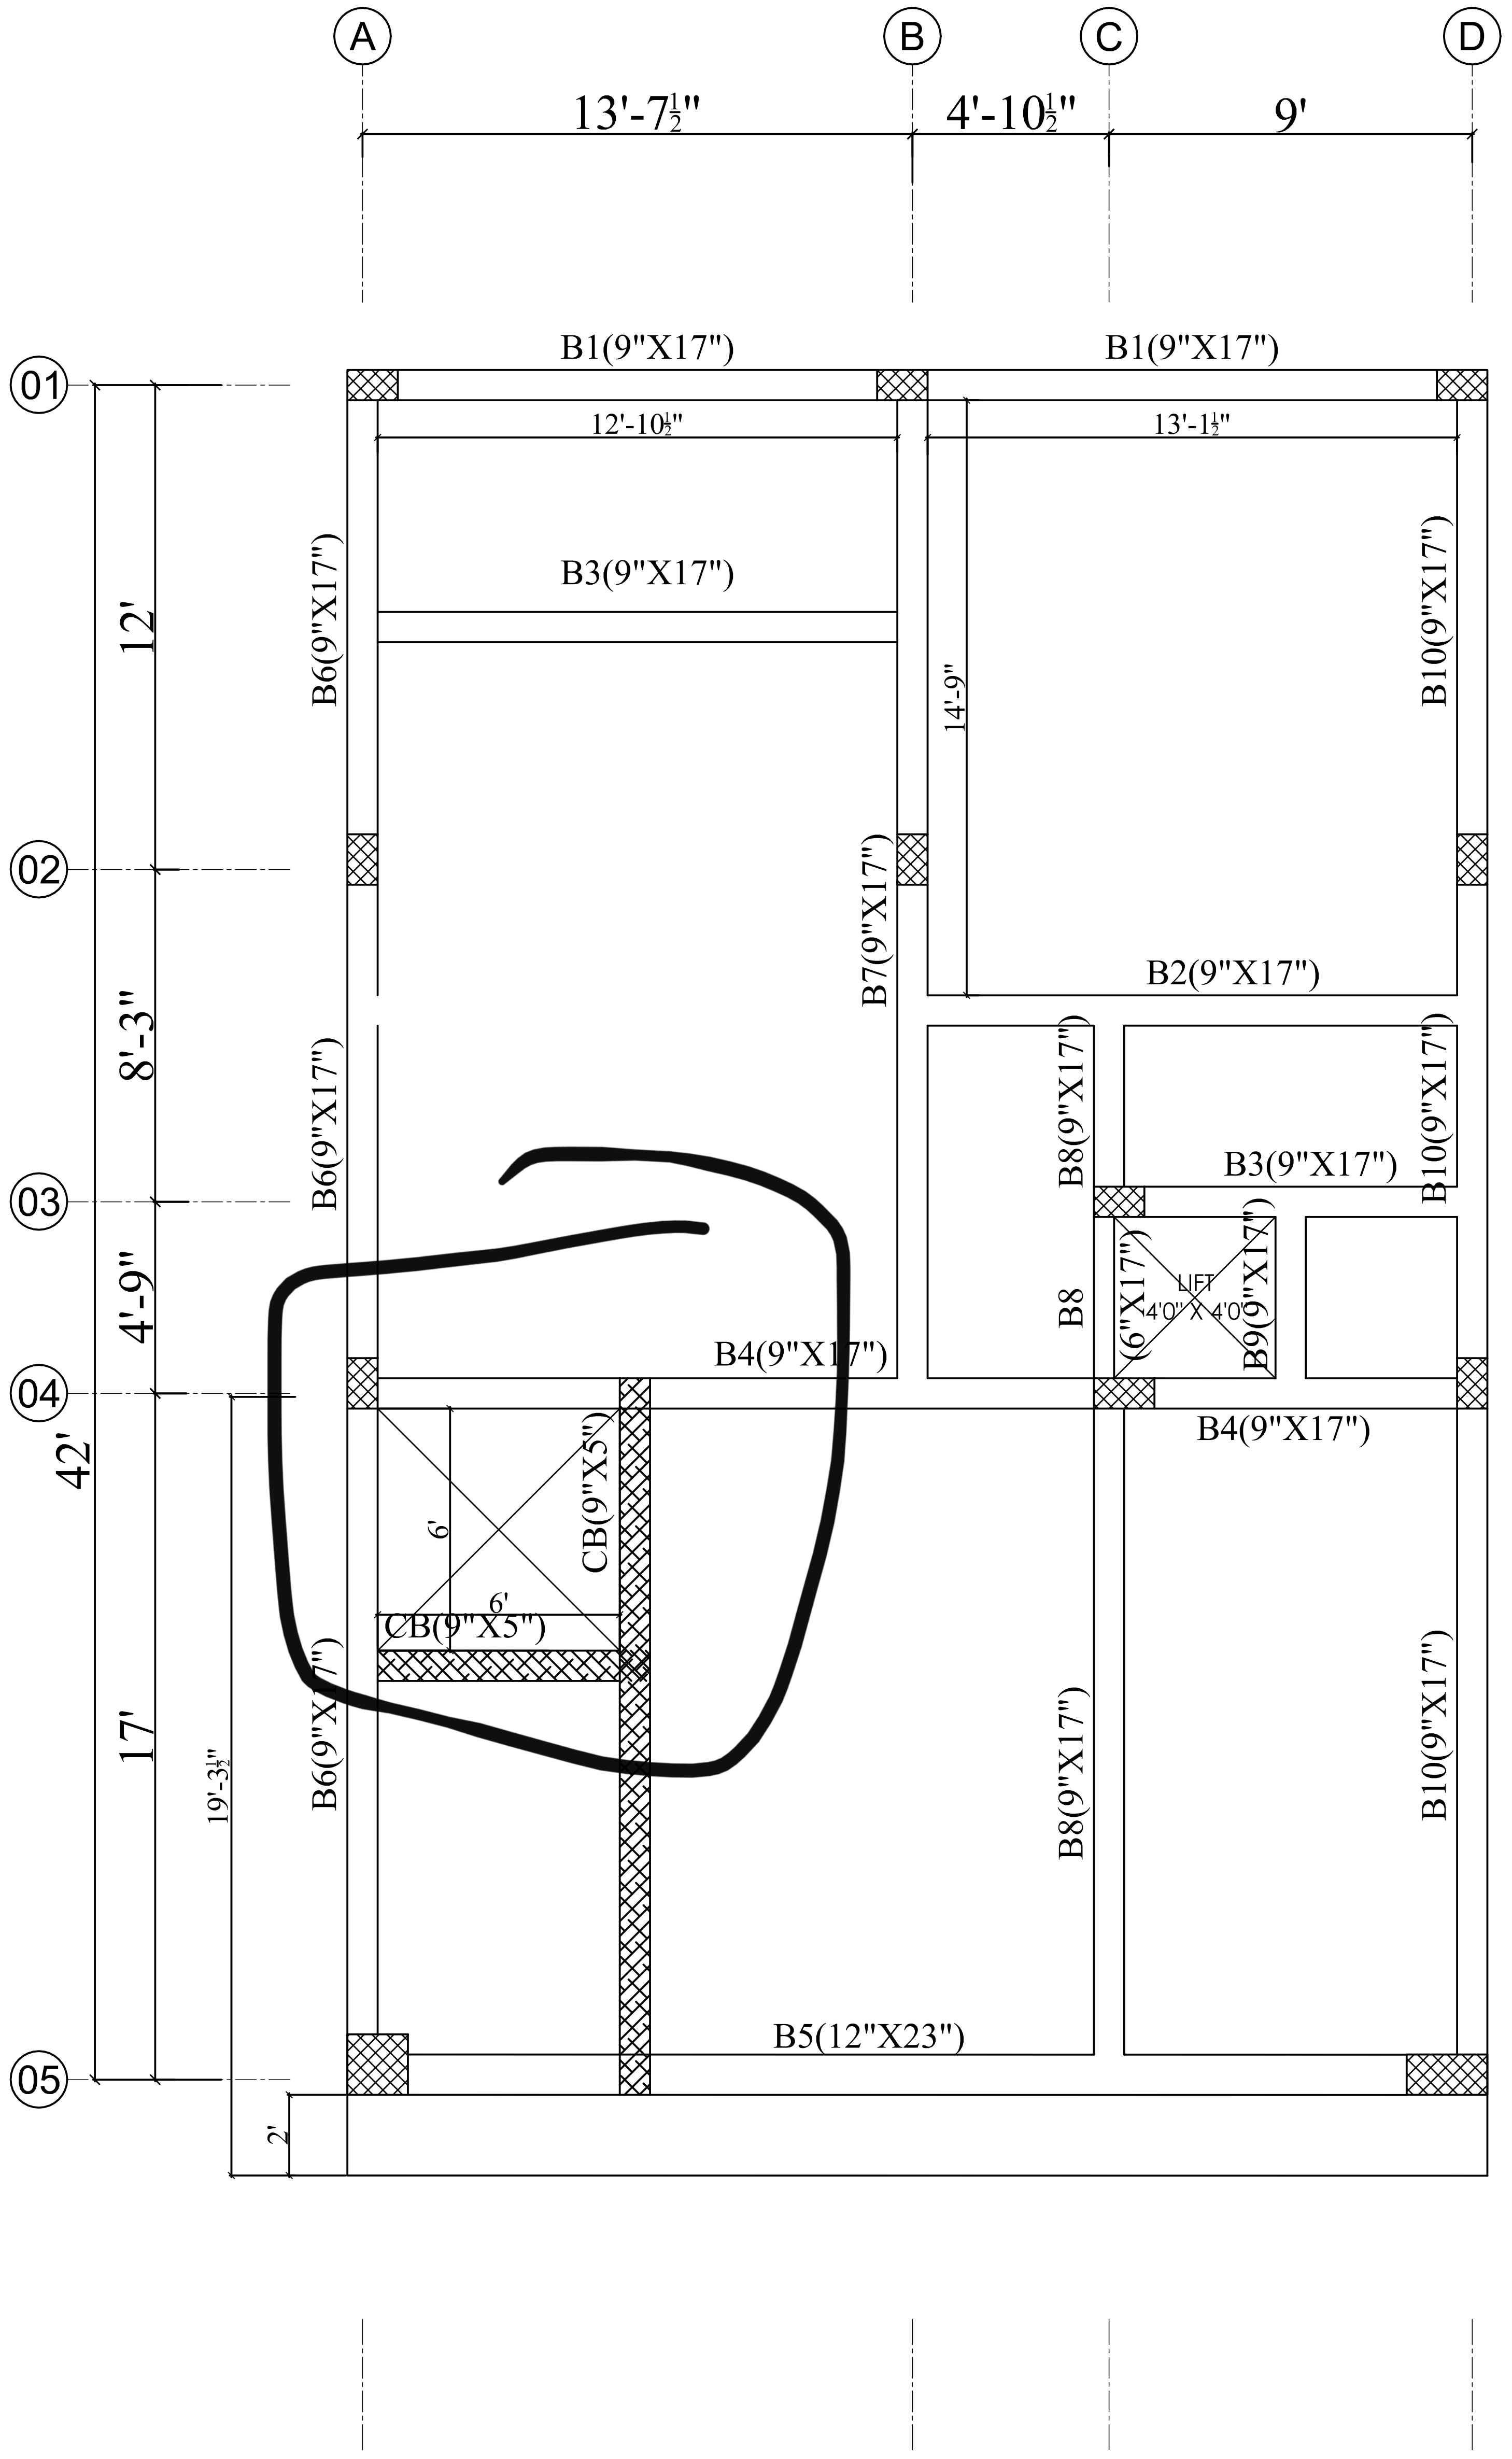

*** ALL BEAMS ARE 9"X17" UNLESS NOTED OTHERWISE.

*** ALL SLABS ARE 5" THK. UNLESS NOTED OTHERWISE.

NOTES

1. ALL DIMENSIONS ARE IN FEETS & INCHES ONLY.
2. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED AND DRAWING SHALL NOT BE SCALED.
3. IF ANY DISCREPANCIES, SHALL BE BROUGHT TO THE NOTICE OF THE CONSULTANT/ DESIGN WING BEFORE COMMENCEMENT OF WORK AT SITE.
4. SBC OF THE SOIL IS CONSIDERED AS 300 KN/SQ.M @ A DEPTH 6'-0" FROM CELLAR LEVEL AS PER SOIL REPORT.
5. THIS BUILDING IS DESIGNED FOR G+3 STOREY R.C.C STRUCTURE.
6. USE M20(1:1½:3) GRADE CONCRETE & FE-500 STEEL CONFORMING TO IS:456-2000 & IS : 1786-2008 AND AMENDMENTS FOR ALL STRUCTURAL MEMBERS.
7. PROVIDE CLEAR COVER FOR
   BEAMS 1" SLABS ½"
   USE WIRED COVER BLOCK OF SAME GRADE OF RCC MEMBER AS PER DETAILS GIVEN.
8. LAPS SHALL BE STAGGERED AND LAP LENGTHS ARE AS FOLLOWS .LAPPING SHALL NOT BE DONE FOR MORE THAN 50% OF TOTAL REINFORCEMENT AT A PARTICULAR SECTION.

DIA OF BARS in mm	GRADE OF CONCRETE-M20						
	8	10	12	16	20	25	32
TENSION BARS(Ldt)	1'-6"	1'-10"	2'-3"	3'-0"	3'-9"	4'-9"	6'-0"
COMPRE BARS(Ldc)	1'-3"	1'-6"	1'-10"	2'-6"	3'-0"	3'-9"	4'-9"

Ld = Development Length of Bar

9. CONCRETE LAID IN THE FORM WORK SHALL INVARIABLY VIBRATE TO OBTAIN MAXIMUM DENSITY AND COMPACTION.
10. THE PROVISIONS MADE IN IS:456 & OTHER RELEVANT CODES SHALL BE STRICTLY FOLLOWED DURING EXECUTION.
11. FOR TIES,LINKS IN COLUMNS REFER COLUMN SCHEDULE DWG. STIRRUPS SHOULD HAVE STANDARD HOOK AS PER SP-34
12. ALL CANTILEVER SLABS & BEAMS SHALL BE .PROVIDED 2 %NEGATIVE SLOPE FOR THE FREE END.
13. EXTRA BARS AT TOP FOR BEAM SHALL BE EXTENDED UPTO 0.25L ON EITHER SIDE FROM THE FACE OF SUPPORTS AND CURTAILMENT OF BOTTOM BARS AT 0.1L FROM DISCONTINUOUS EDGE AND 0.15L FROM CONTINUOUS EDGE MEASURED FROM CENTER OF SUPPORT, WHERE 'L' IS C/C OF SUPPORTS.
14. SLAB BARS ARE TO BE CRANCKED AT 0.25 L FROM CENTRE OF SUPPORT NEAR CONTINUOUS EDGES AND 0.15 L FROM CENTER OF SUPPORT NEAR DISCONTINUOUS EDGES.
15. IN SLABS EXTRA BARS OVER CONTINOUS SUPPORT SHOULD BE TAKEN UPTO 0.3L FROM THE FACE OF BEAM.CRANK BARS AT CONTINUOUS SUPPORT SHOULD NOT BE TERMINATED ON BEAM AND SHOULD BE EXTENDED UPTO 0.3L FROM FACE OF SUPPORT INTO THE ADJACENT SPAN.
16. IN BEAMS & SLABS, OVERLAPPING SHALL NOT BE PROVIDED OVER SUPPORTS FOR TOP BARS AND AT MID SPAN FOR BOTTOM BARS.
17. WHEREVER REINFORCEMENT IS PROVIDED IN TWO LAYERS IN BEAMS SPACER BAR SHALL BE PROVIDED TO MAINTAIN 25MM GAP OR MAXIMUM DIA OF MAIN BAR,WHICH EVER IS MORE, BETWEEN TWO LAYERS.
18. THE REINFORCEMENT SHALL BE CHECKED BEFORE LAYING CONCRETE.
19. CURING SHOULD BE DONE AT LEAST FOR 21 DAYS.

Project :

REV	DATE	DESCRIPTION	CHKD.BY	REFER

Client :

****

Title :

ROOF BEAM LAYOUT
(TERRACE FLOOR)

NORTH POINT:-

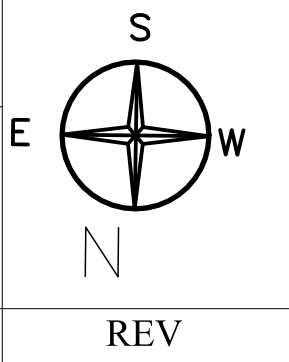

DRG.NO :		SCALE	REV
MSE-NA-SD-010(R0)		N.T.S	R0
DATE	DESIGNED	DRAWN	CHKD	APPROV
13.09.2021	SURENDRA	THRINADH	SURENDRA	SURENDRA