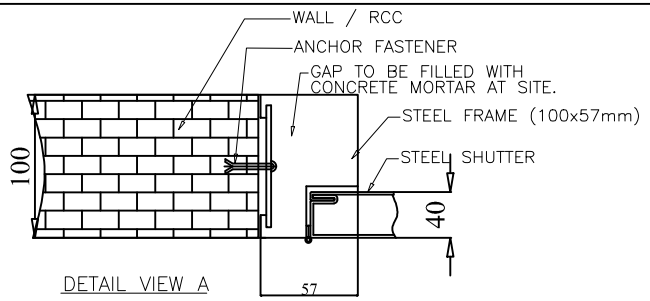


DETAIL VIEW A

NOTES:–
ALL DIMENSIONS ARE IN MM.

NOTES:–
ALL DIMENSIONS ARE IN MM.

A. ABBREVIATION

Wall Opening Width : WOW
Wall Opening Height : WOH
Frame Opening Height : FOH
Frame Opening Width : FOW
Shutter Opening Height : SOH
Shutter Opening Width : SOW

MATERIAL OF CONSTRUCTION


FRAME : G.I. 1.20mm Sheet
SHUTTER : G.I. 0.80mm Sheet
THICKNESS : 40MM
FRAME PROFILE : 100 x 57Mm (Single Ribet)

INFILL MATERIAL : MINERAL WOOL
DENSITY 48kg/cm3


PAINT: AS PER AS APPROVED RAL SHADE
POWDER COATED (DFT 80 Microns min)

SCHEDULE OF HARDWARE

1) S.S. Ball Bearing Hinges - 3 NOS (GEZE Make) .
2) External Trim Bar YALE MAKE - 2 Nos
3) Heavy Duty Door Closer GEZE MAKE -1 Nos
4) Anchor Fastener - 8 x 80MM.

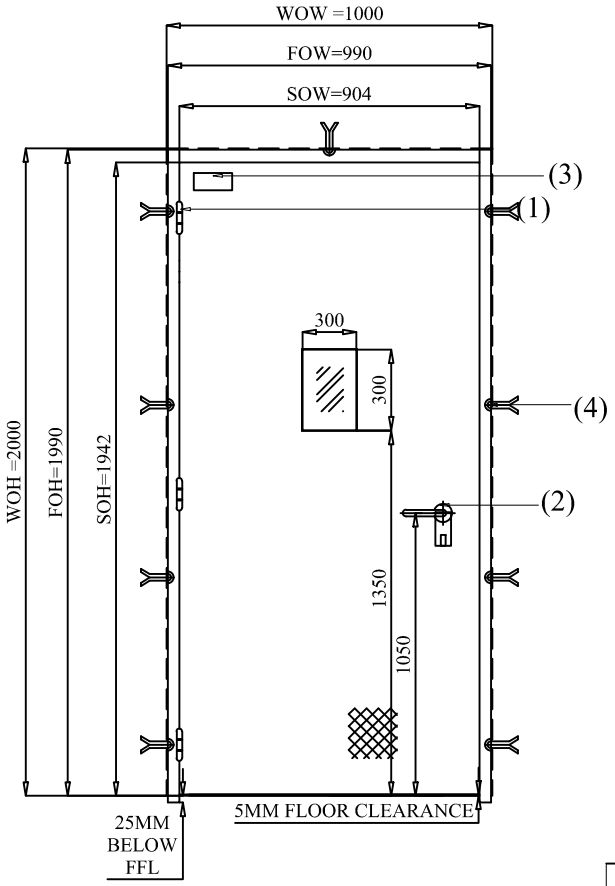

Door Opening Style - (C)
Left Hand Inside Opening

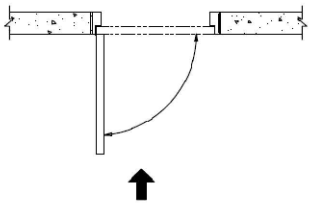

PLEASE NOTE : Wall Openings to be maintained at site

SR. NO	WALL OPENING WIDTH	WALL OPENING HEIGHT	QTY	RAL
01	1000	2000	01	9002

TOLERANCE - ±02mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: SINGLE LEAF STEEL DOOR

	NAME	SIGN	DATE
DRAWN	P.A		03.02.2020
CHECK	G.J		03.02.2020
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SYNERGY
PROJECT - EMBASSY
SITE LOCATION - CHAKAN, PUNE.
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/19-20/0231 REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 01 OF 01