



DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2030	2500	585	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2170	2580	590	



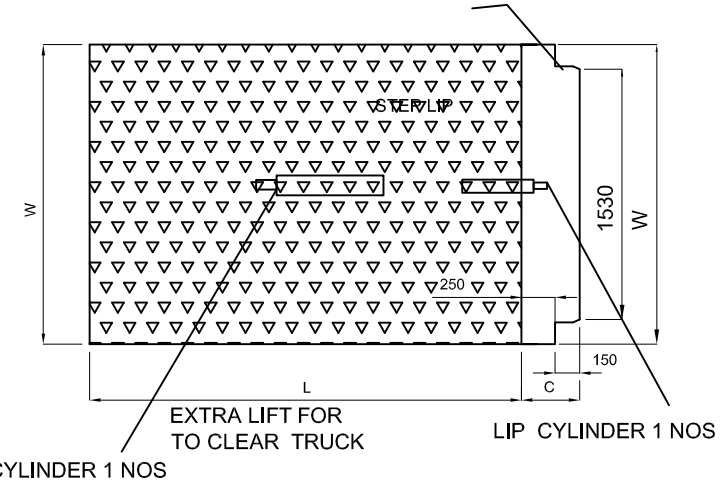

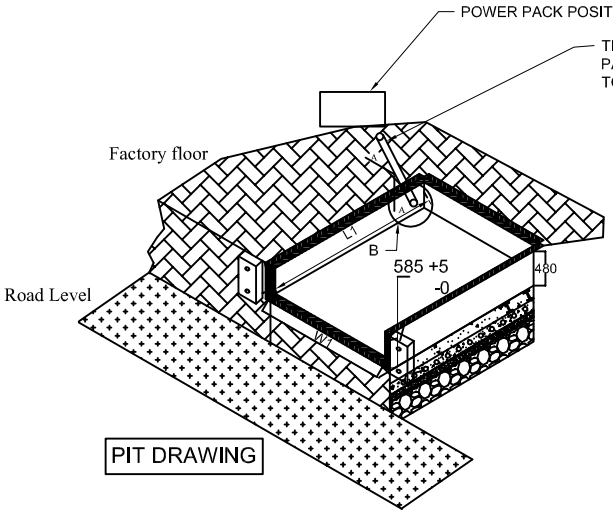



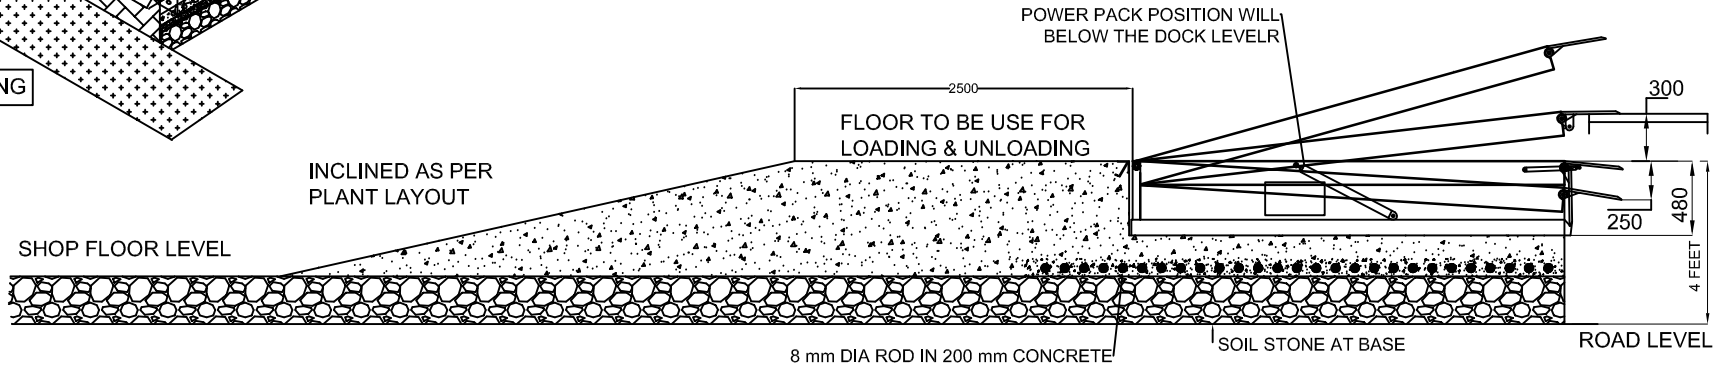

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ±15 MM

DOCK LEVELER- 10 TON CAPACITY

CLIENT APPORVAL-		NIHVA TECHNOLOGIES PVT. LTD. — NIHVA TECHNOLOGY PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
DRAWN :- A. KUMAR	DATE : - 31/10/2014	CLIENT - PMP DRIVE SYSTEM
CHECK:- R. KULKARNI	DATE : - 31/10/2014	PROJECT -
ALL DIMENSION ARE IN mm		SITE - MIDC, DAMBOLI CHAKAN
If any queries contact : projects@nihva.com		