NIHVA

We
Make
Possible


www.nihva.com







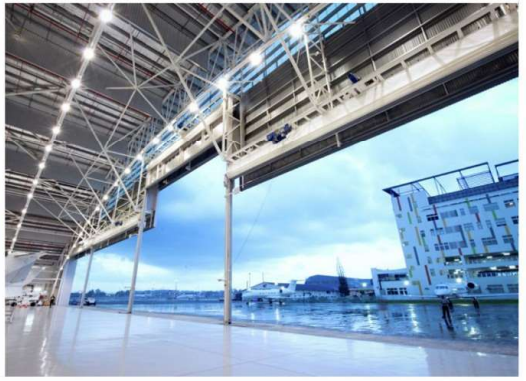

Our Verticals

NIHVA



Door Automation

High Speed Doors

Sectional Doors

Glass Doors & Operators

Sliding - Folding Doors

Extra Large Opening Doors

Motorized Rolling Shutter

Fire Rated Doors

Entrance Gates

Access Control Devices

Loading / Unloading Bay

Automation Solutions

Special Purpose Machine (SPM)

Material Handling Equipment's -

- Telescopic Conveyor
- Scissor Lift
- Maintenance Work Platform
- Goods Lift
- Manipulator

Retractable Roof

Engineering Services

Wireless Automation (M2M)

Robotics Application

Secondary Packaging Machines

ACO (Products)

NIHVA

NIHVA Technologies Pvt. Ltd.

NIHVA Major Client List



NIHVA


NIHVA Technologies Pvt. Ltd.


RETRACTABLE SLIDING POOL COVER

NIHVA

NIHVA Technologies Pvt. Ltd.

RETRACTABLE POOL COVER - SLIDING PANEL STACKER

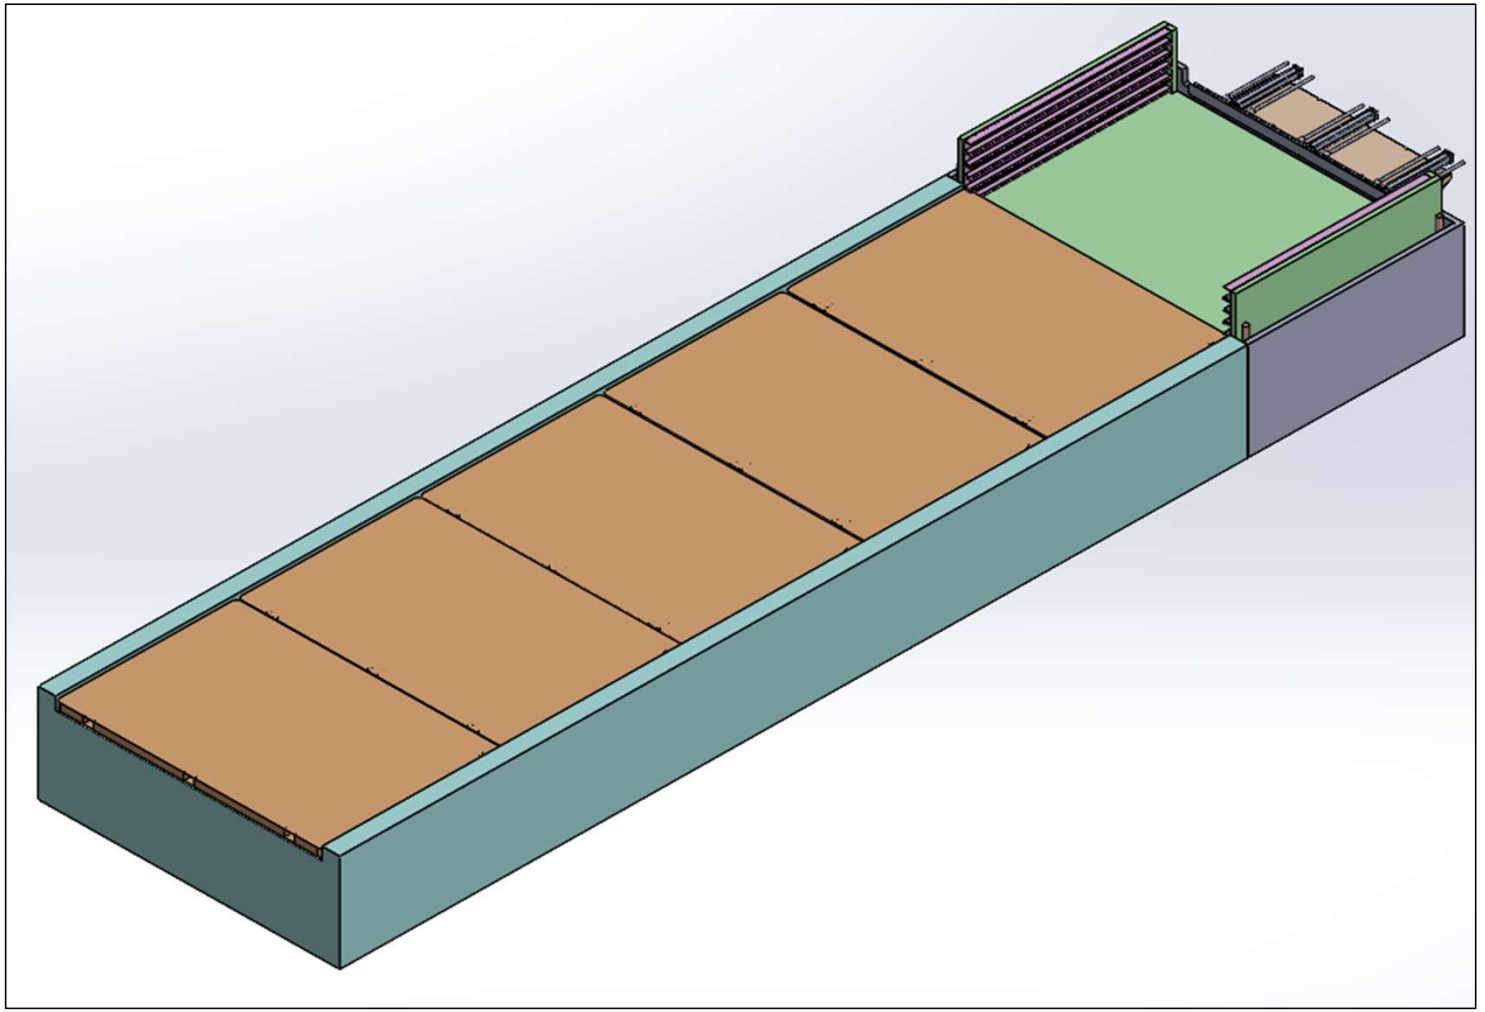

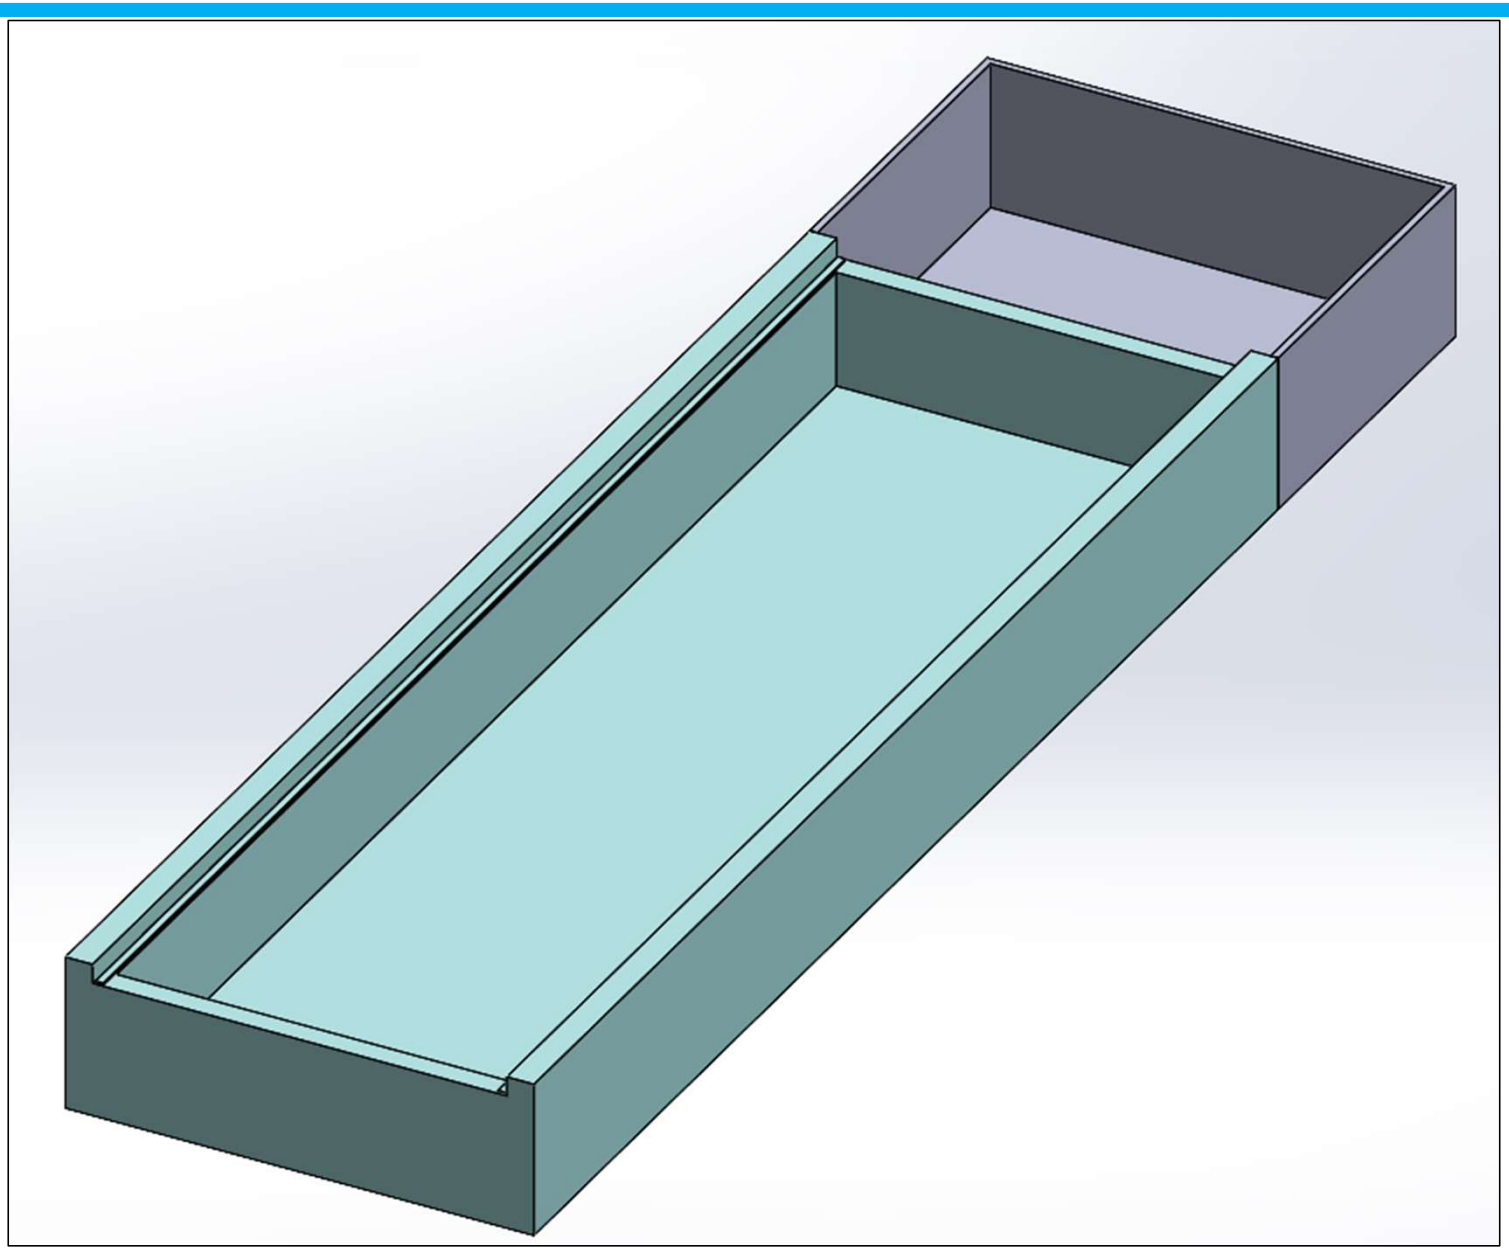

NIHVA

NIHVA Technologies Pvt. Ltd.


The 3d view of pool and pit is for general representation of the area where NIHVA is planning to provide retractable pool cover

Pool width = 5300 mm
Pool length = 17820 mm

Pit width = 5300 mm
Pit length = 4385 mm
Pit depth = 2050 mm


PIT STACKER ARRANGEMENT

NIHVA
NIHVA Technologies Pvt. Ltd.

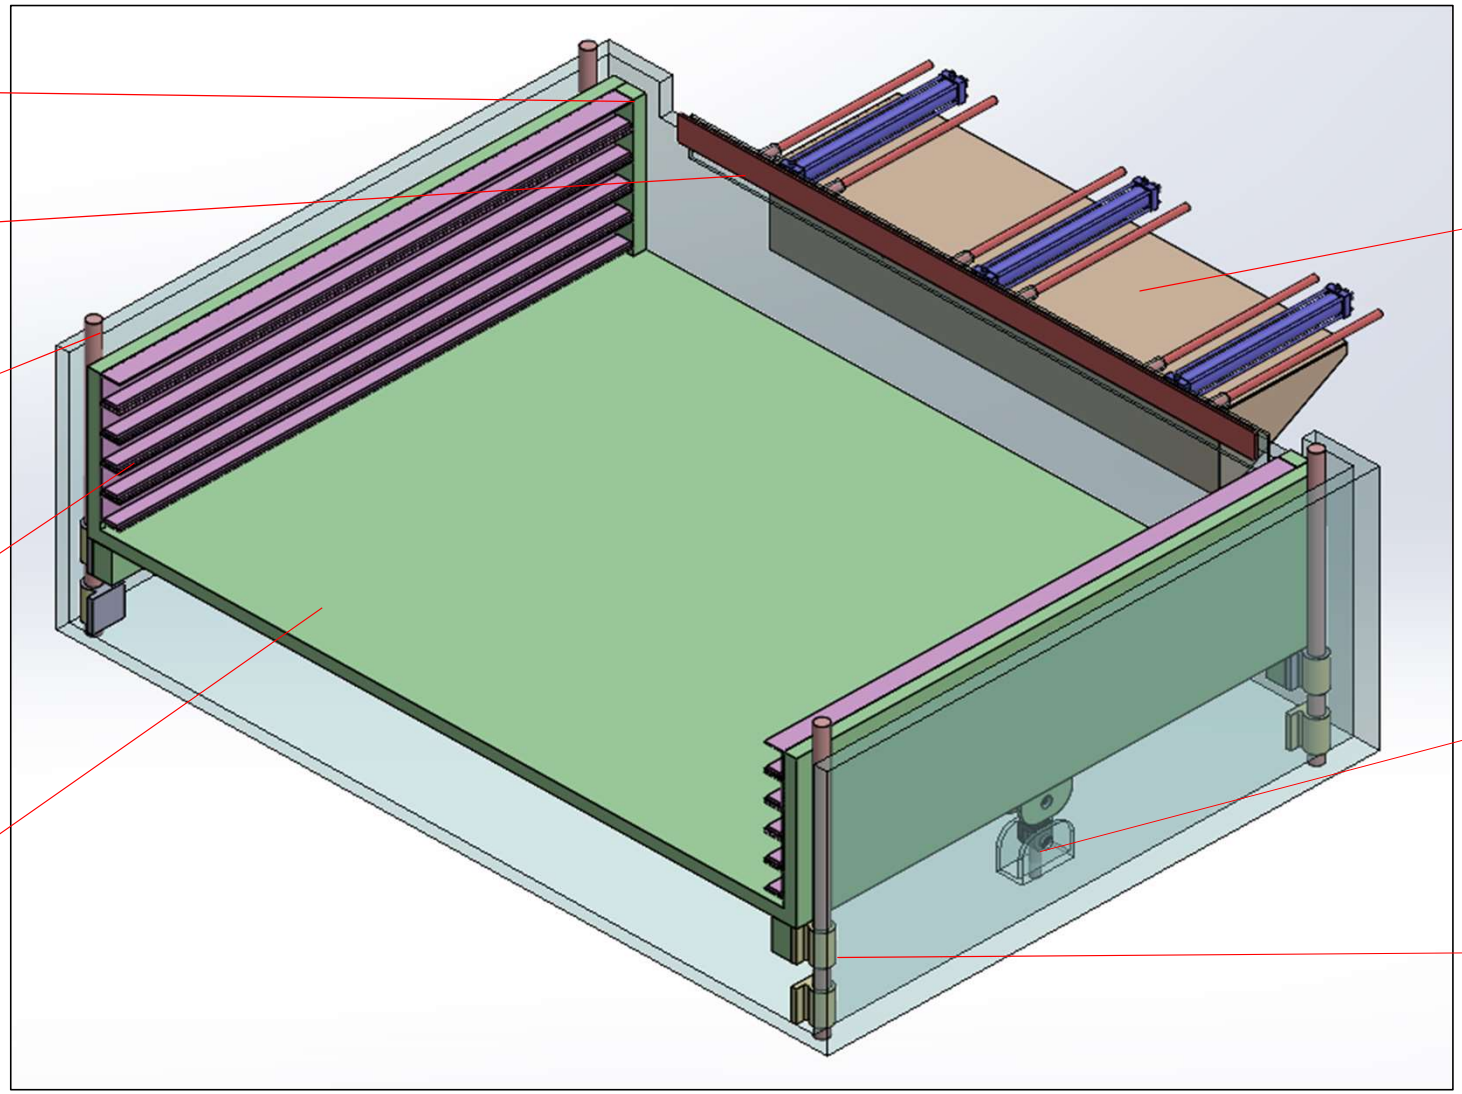


PUSHER ASSLY ARRANGEMENT

NIHVA
NIHVA Technologies Pvt. Ltd.

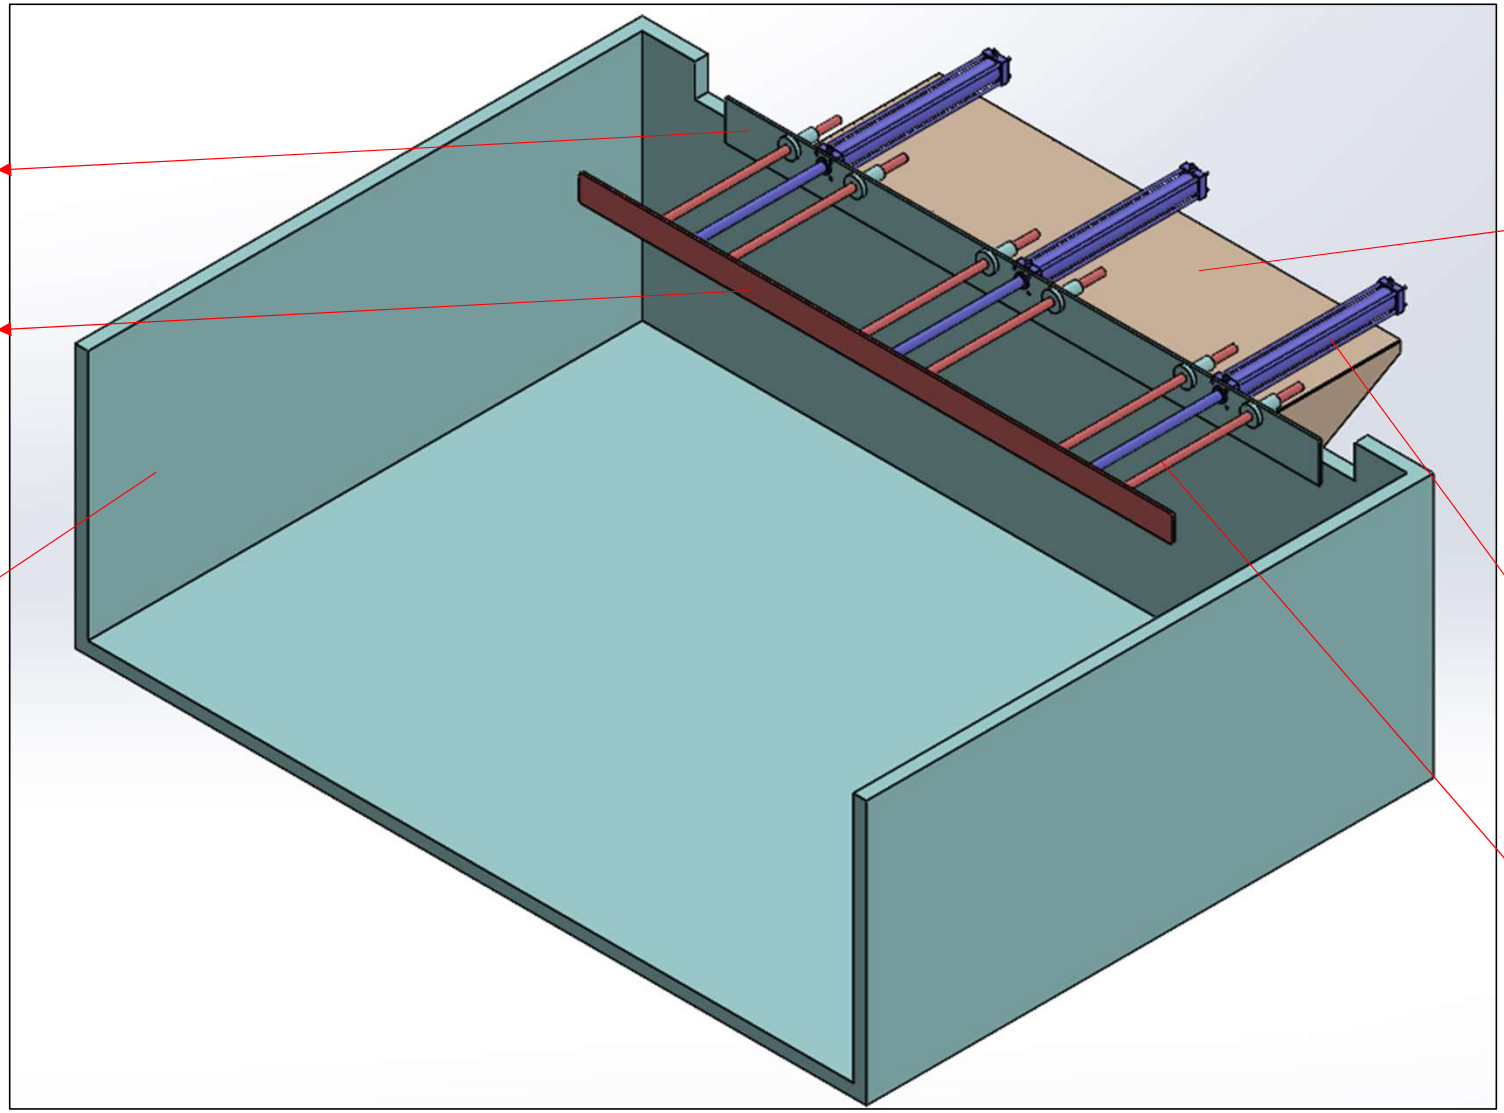

STAGE I – COMPLETELY ENCLOSED PANELS

NIHVA
NIHVA Technologies Pvt. Ltd.

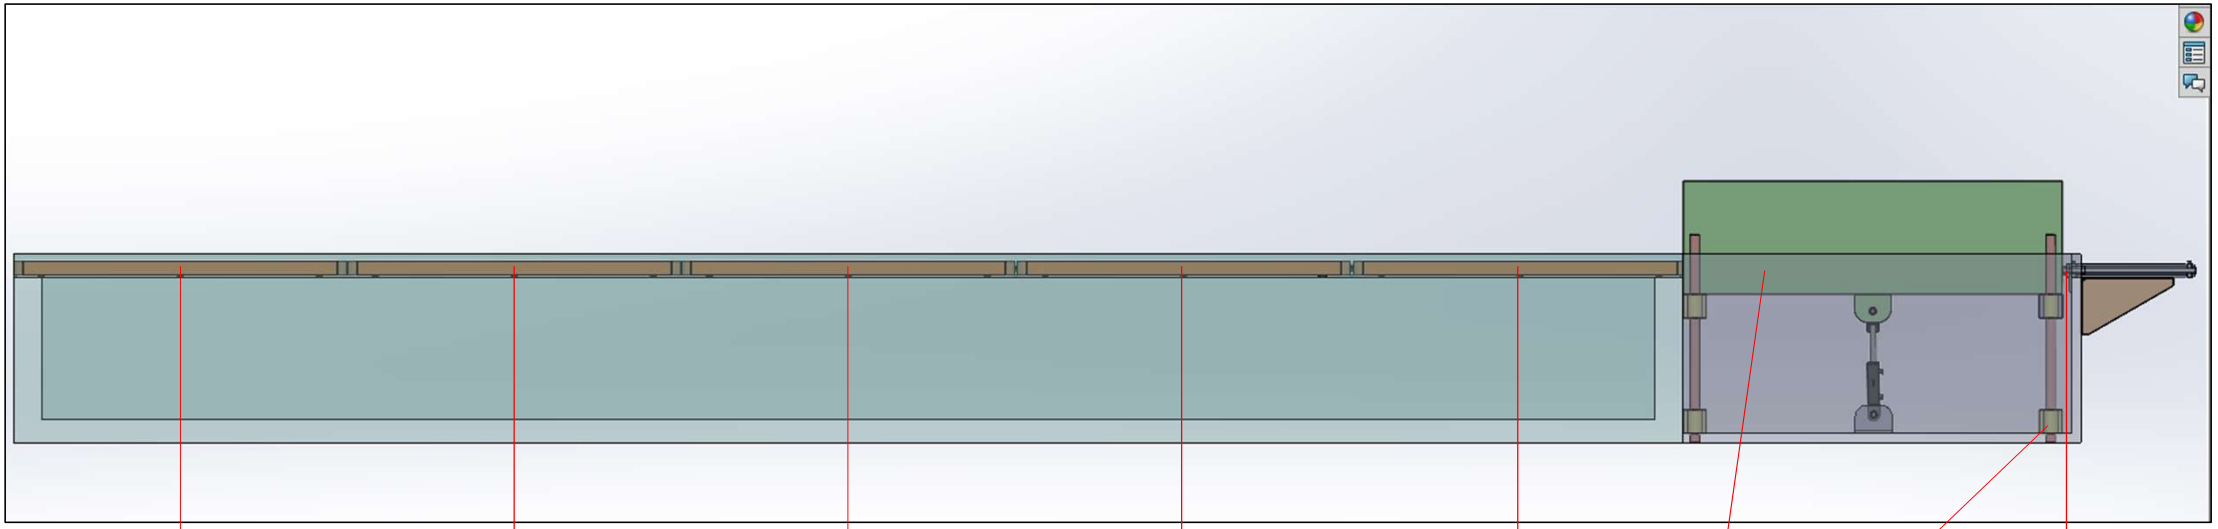

ENGINE PANEL 1

PANEL 2

PANEL 3

PANEL 4


PANEL 5

PANEL STACKER

PUSHER ASSLY

STAGE II – PANEL 5 STACKED


NIHVA
NIHVA Technologies Pvt. Ltd.

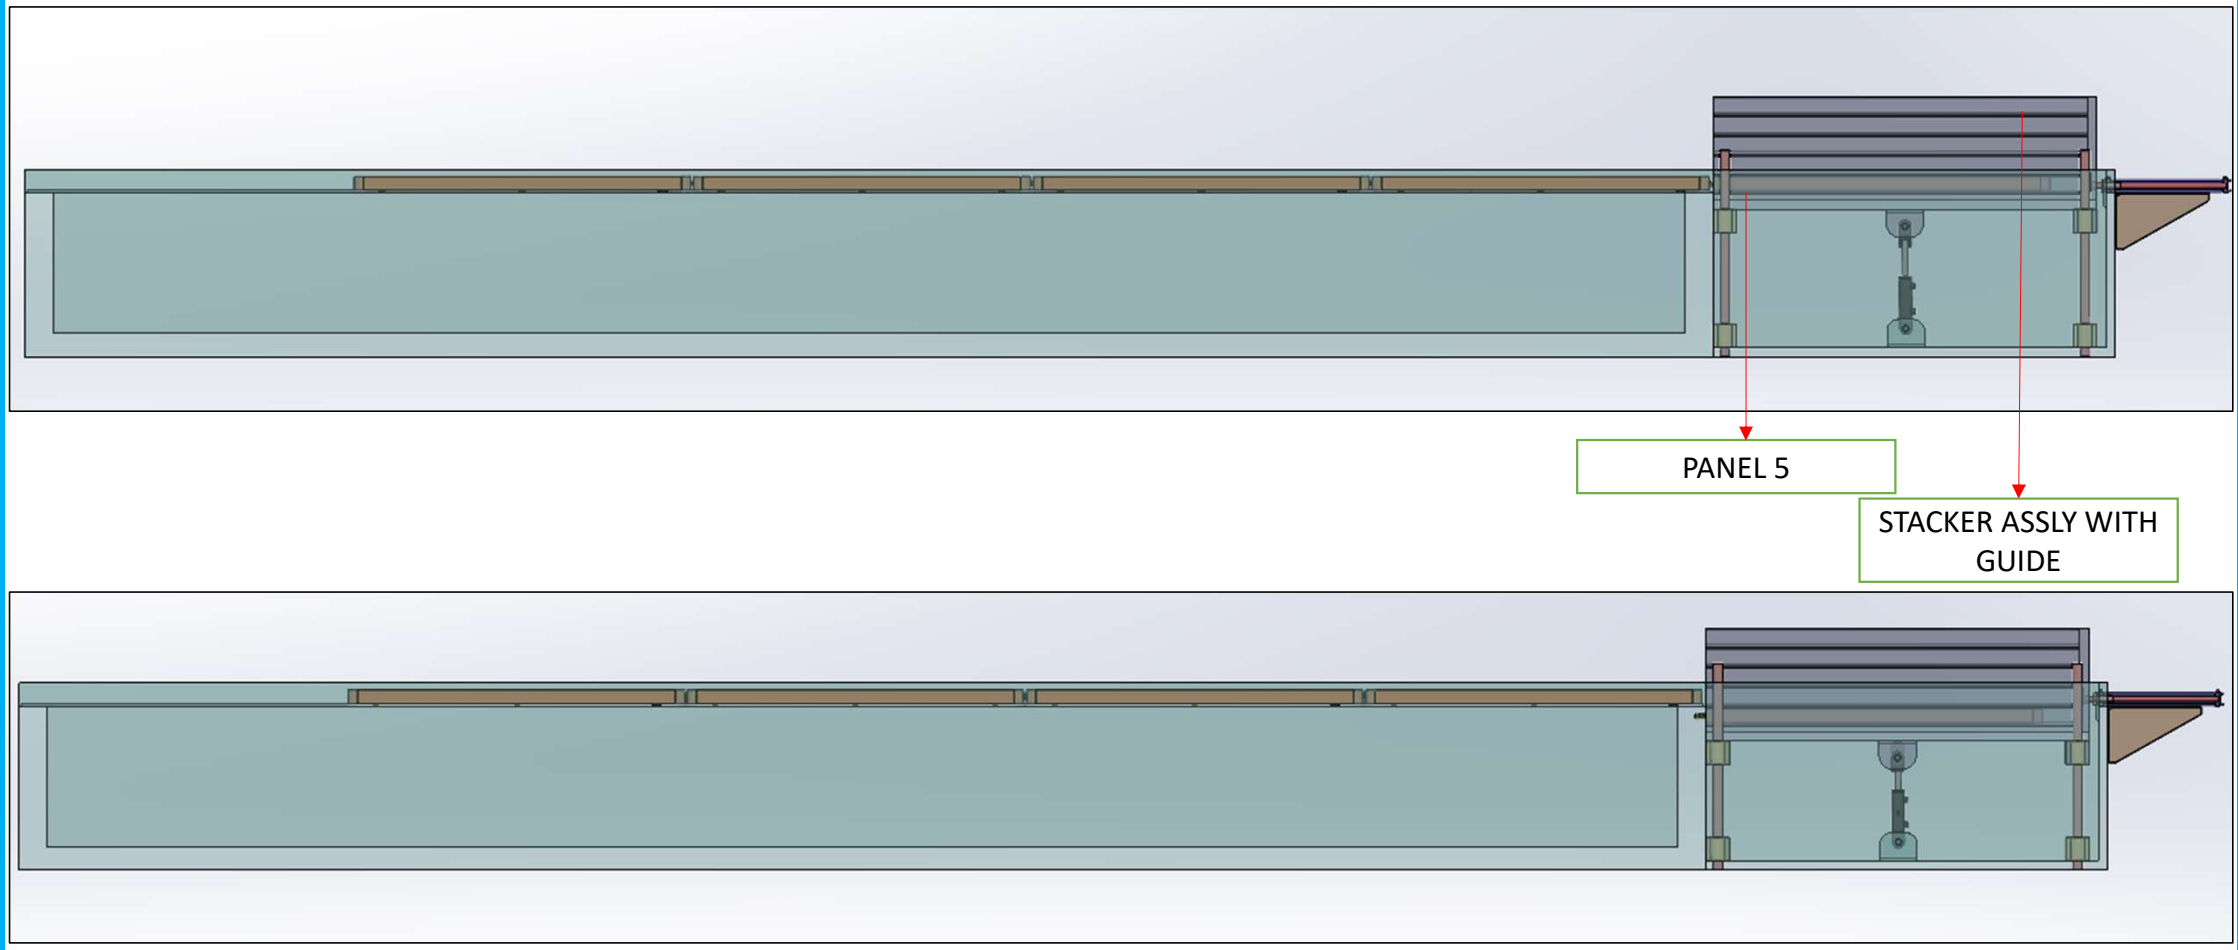

In stage II, panel 5 stacks on the stacker assembly and rest. After that the hydraulic stacker moves downwards inside the pit as per the pitch of the guide so that next panel can stack in same manner in hydraulic stacker.

STAGE III – PANEL 4 STACKED


NIHVA
NIHVA Technologies Pvt. Ltd.

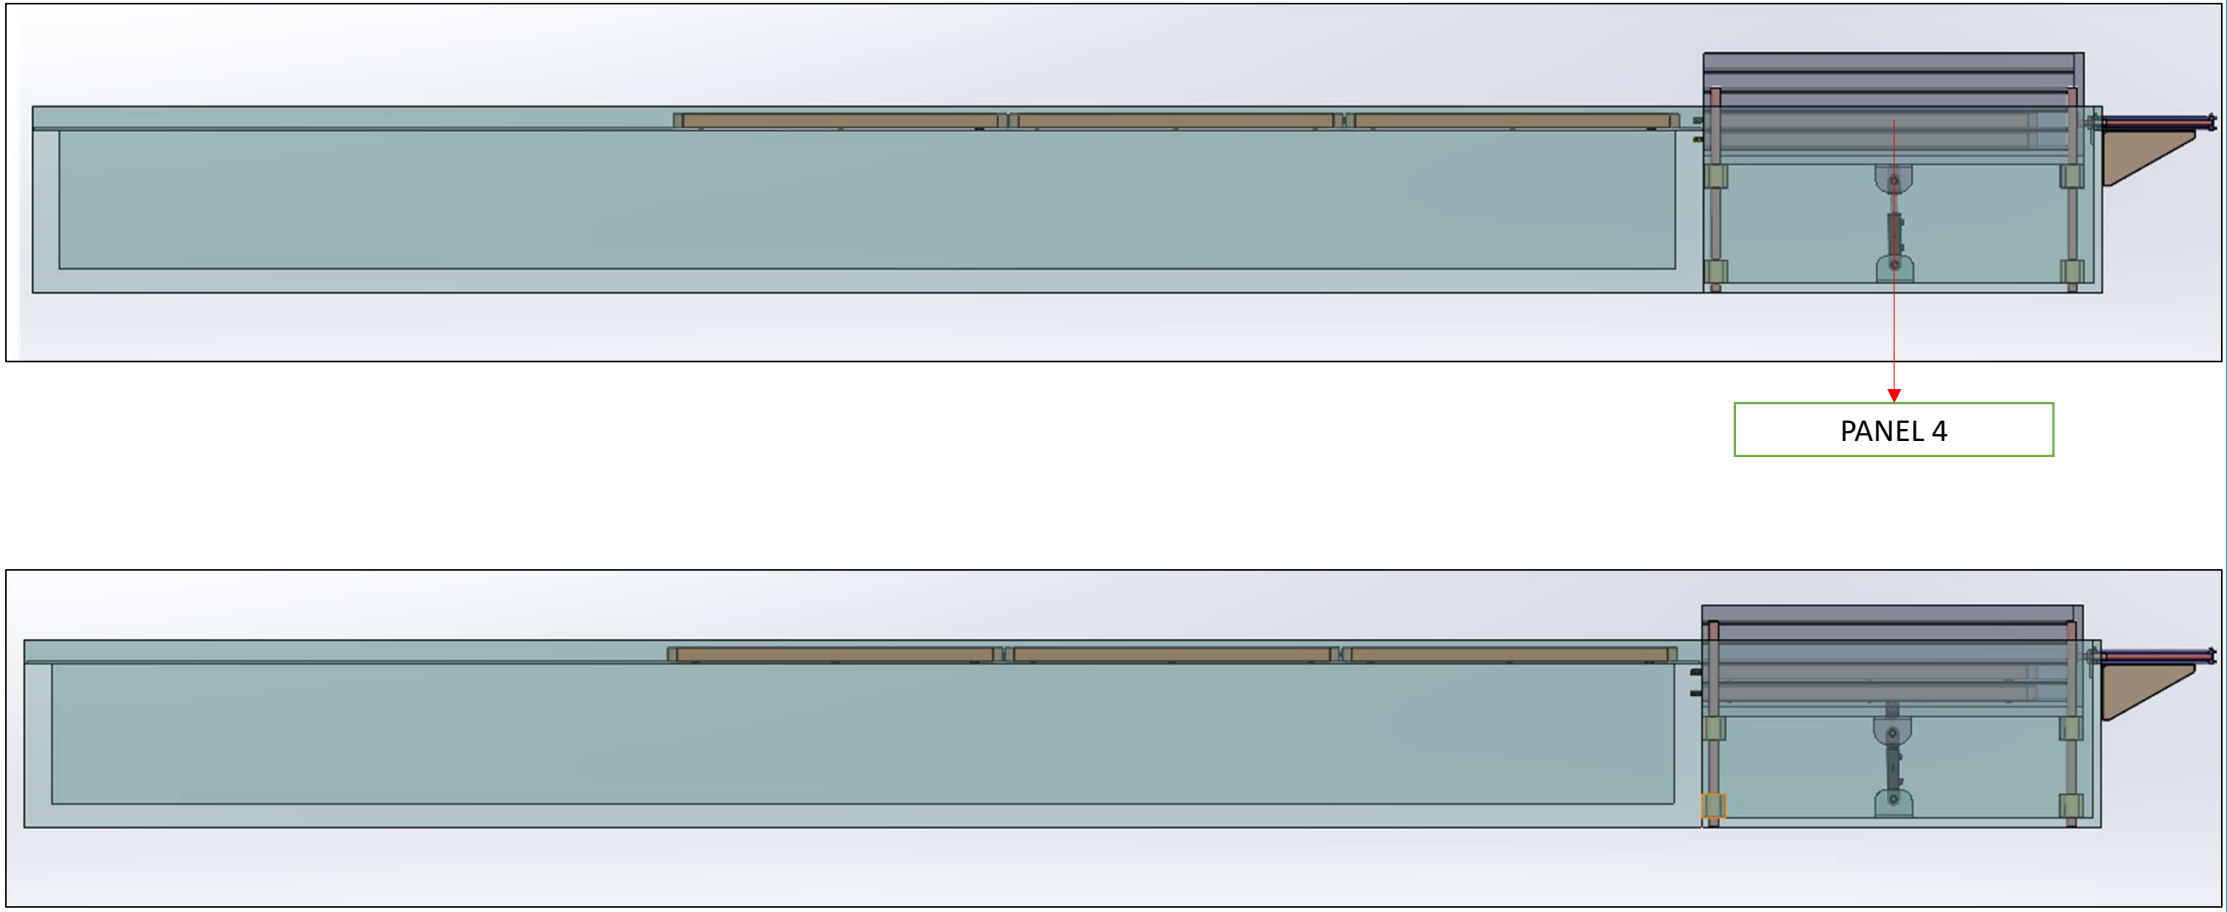


The stacker movement is guide based which is on all the 4 side of the pit.

STAGE IV – PANEL 3 STACKED

NIHVA
NIHVA Technologies Pvt. Ltd.

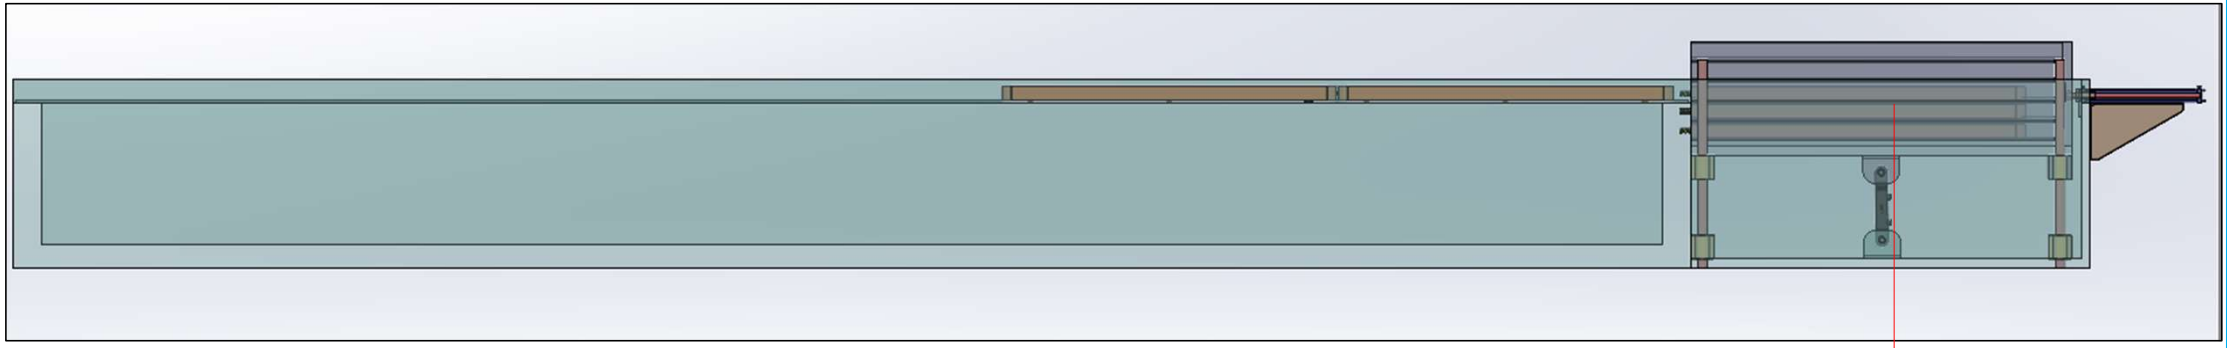

PANEL 3

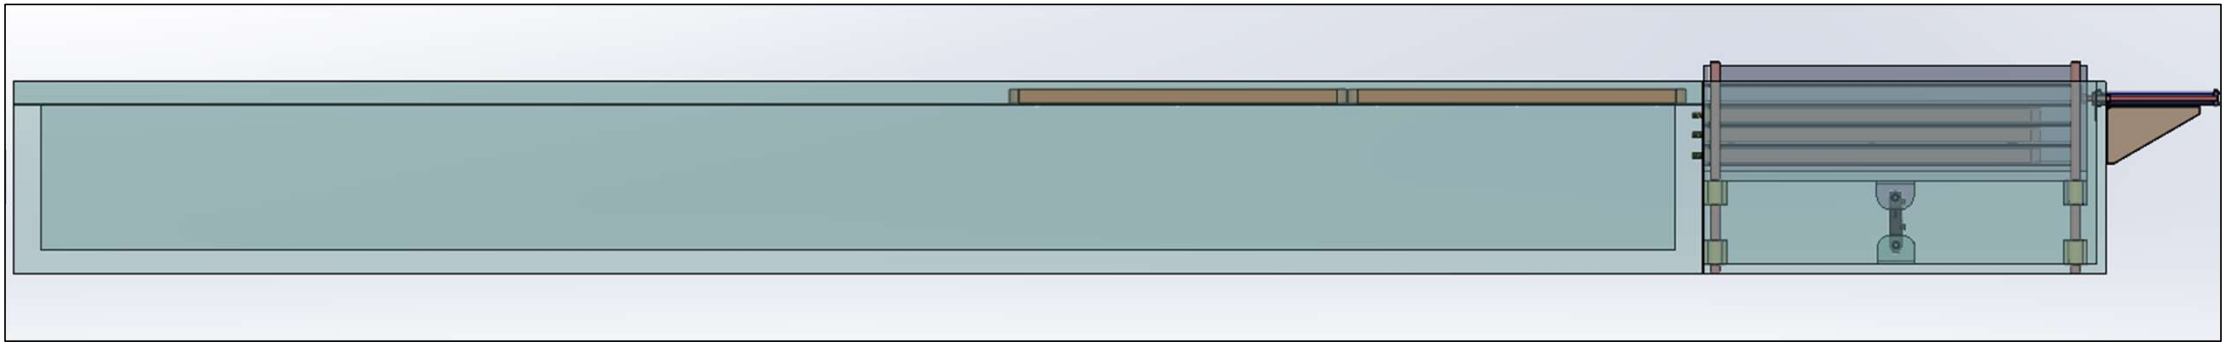

STAGE V – PANEL 2 STACKED

NIHVA
NIHVA Technologies Pvt. Ltd.




PANEL 2



STAGE VI – All STACKED


NIHVA
NIHVA Technologies Pvt. Ltd.

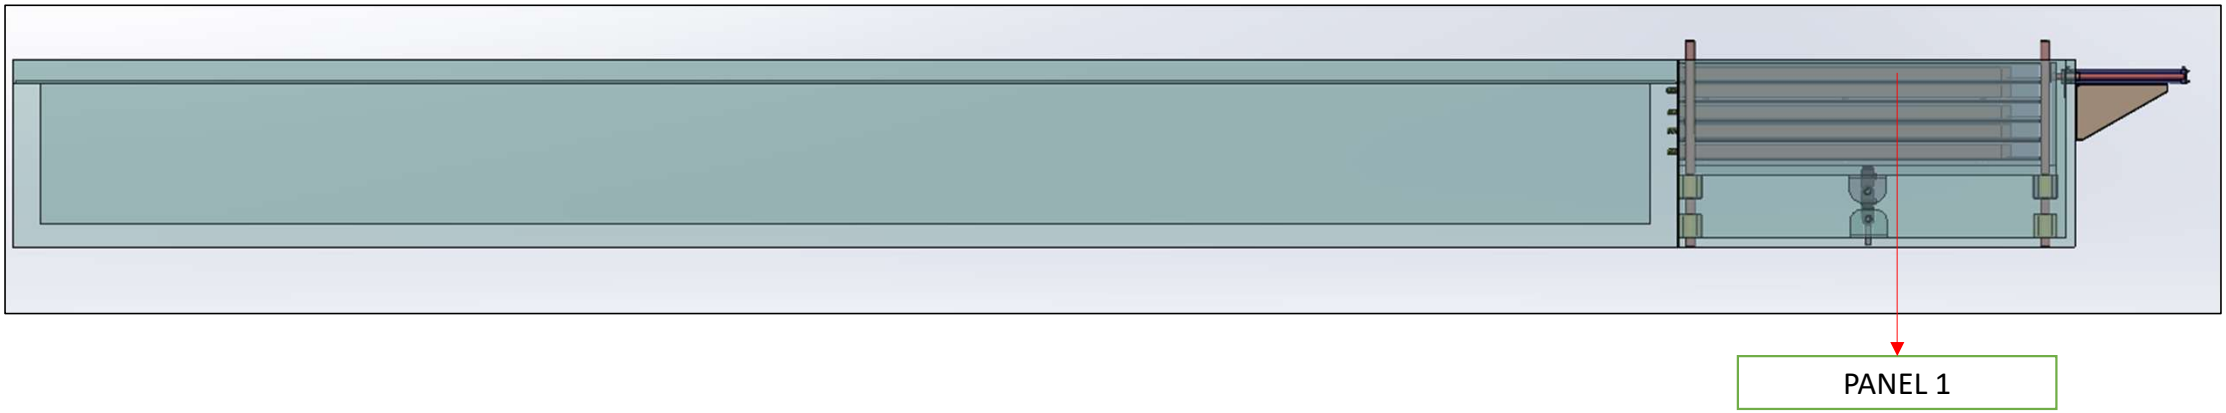

All the panel including the engine panel will get stacked in stacker. The height of the stacker will be adjusted in such a manner that once all panel is stacked it will be levelled to existing floor. The position and stop points of the stacker will be decided by controlled logic provided to the system through control panels and required automation system.


STAGE VI – All STACKED

NIHVA
NIHVA Technologies Pvt. Ltd.

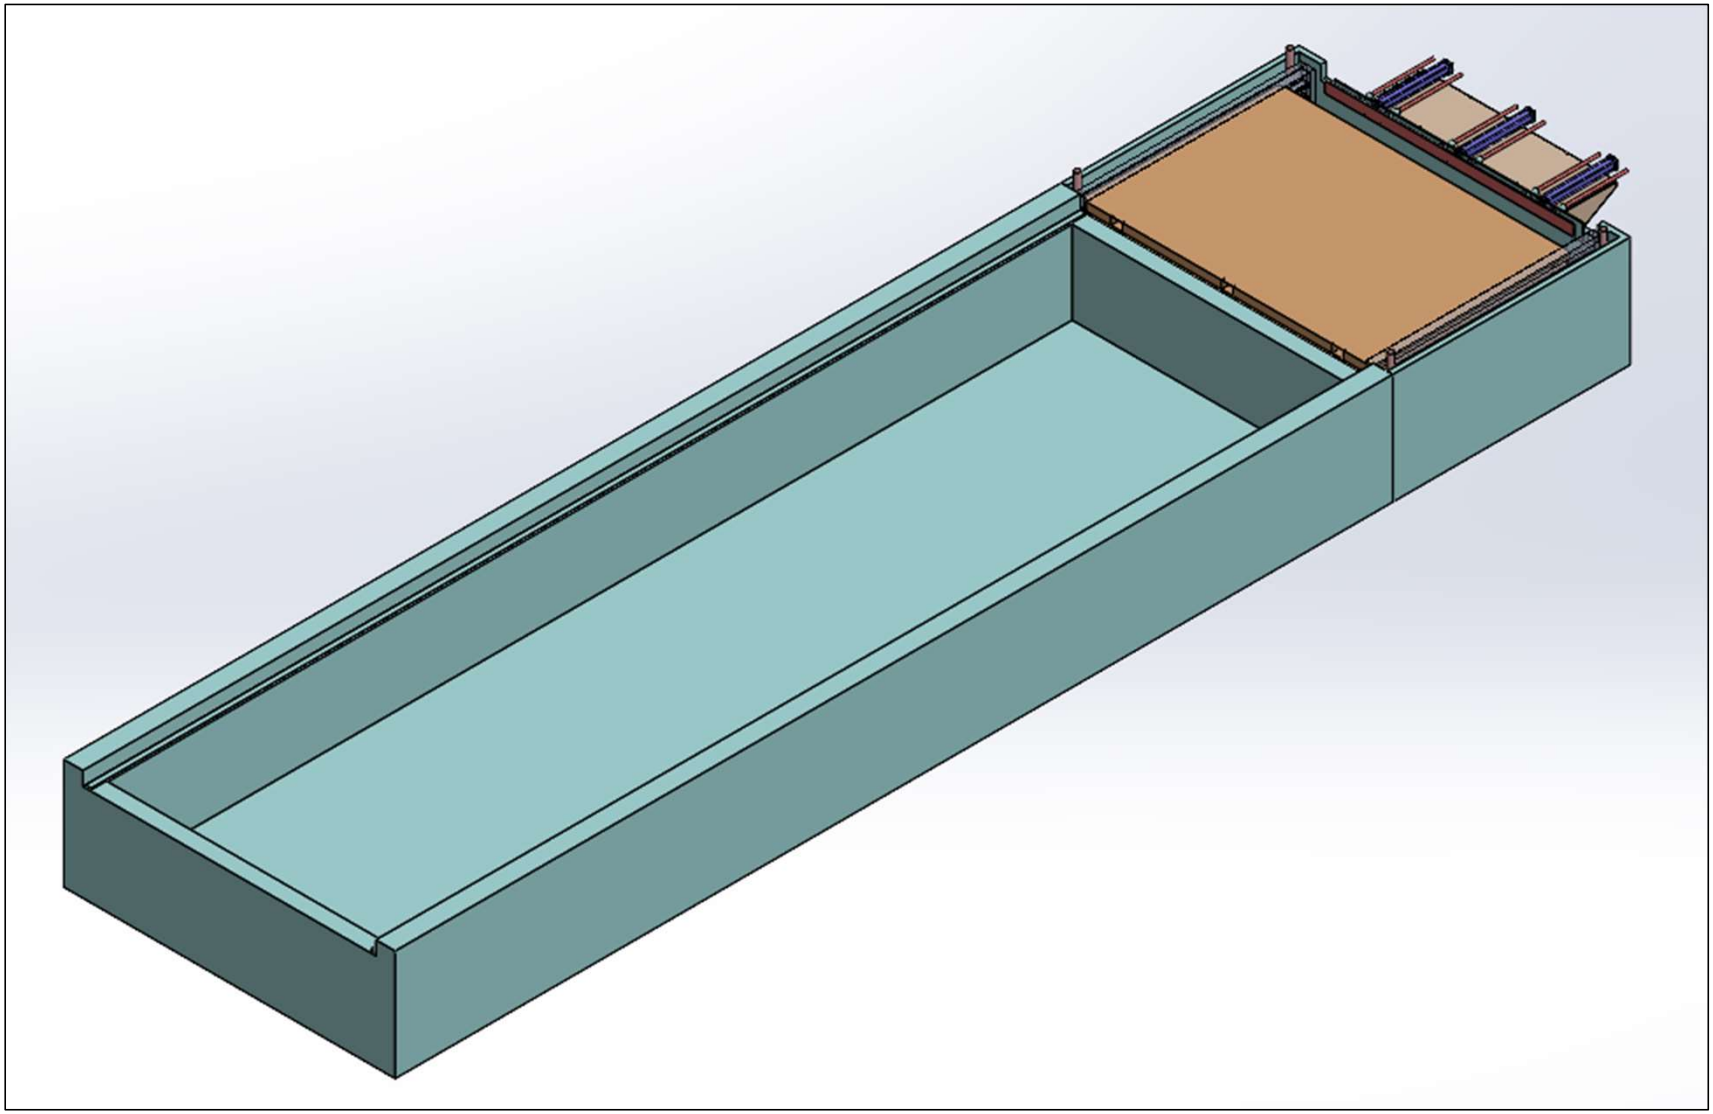

NIHVA

NIHVA Technologies Pvt. Ltd.

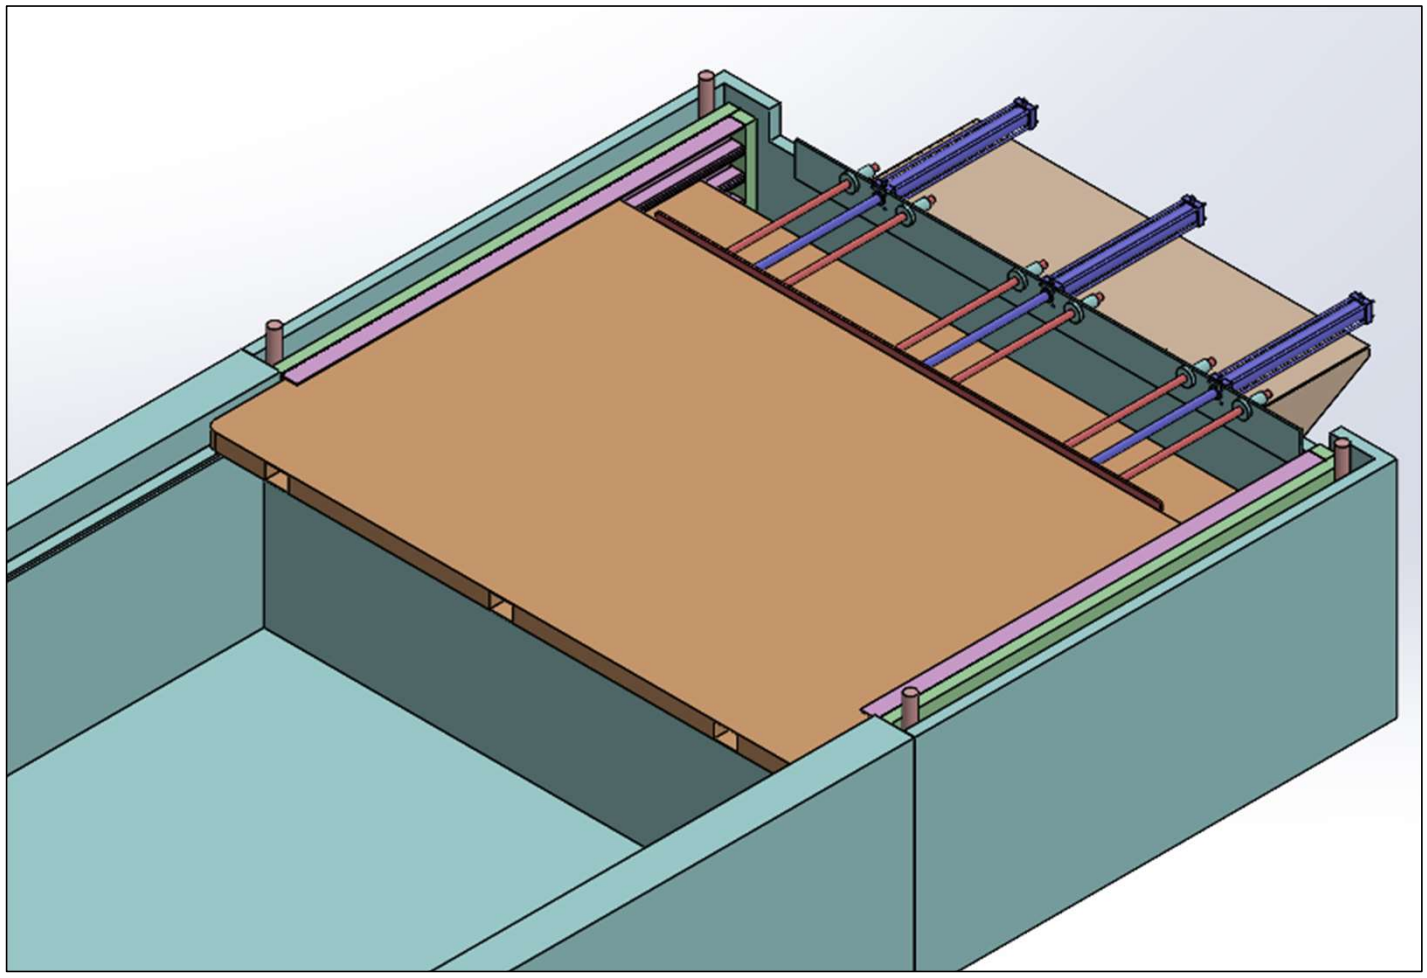



Each hydraulic pusher consists of a steel base frame that can be stamped by single cylinders on two long beams acting as guide rods. Total three such system will be installed (as per the conceptual design, can increase or decrease as per the final design).

They are mounted inside the pit and attached to pusher plate as single unit which helps each panel to be pushed back into the system one by one.

ENCLOSED VIEW

NIHVA
NIHVA Technologies Pvt. Ltd.

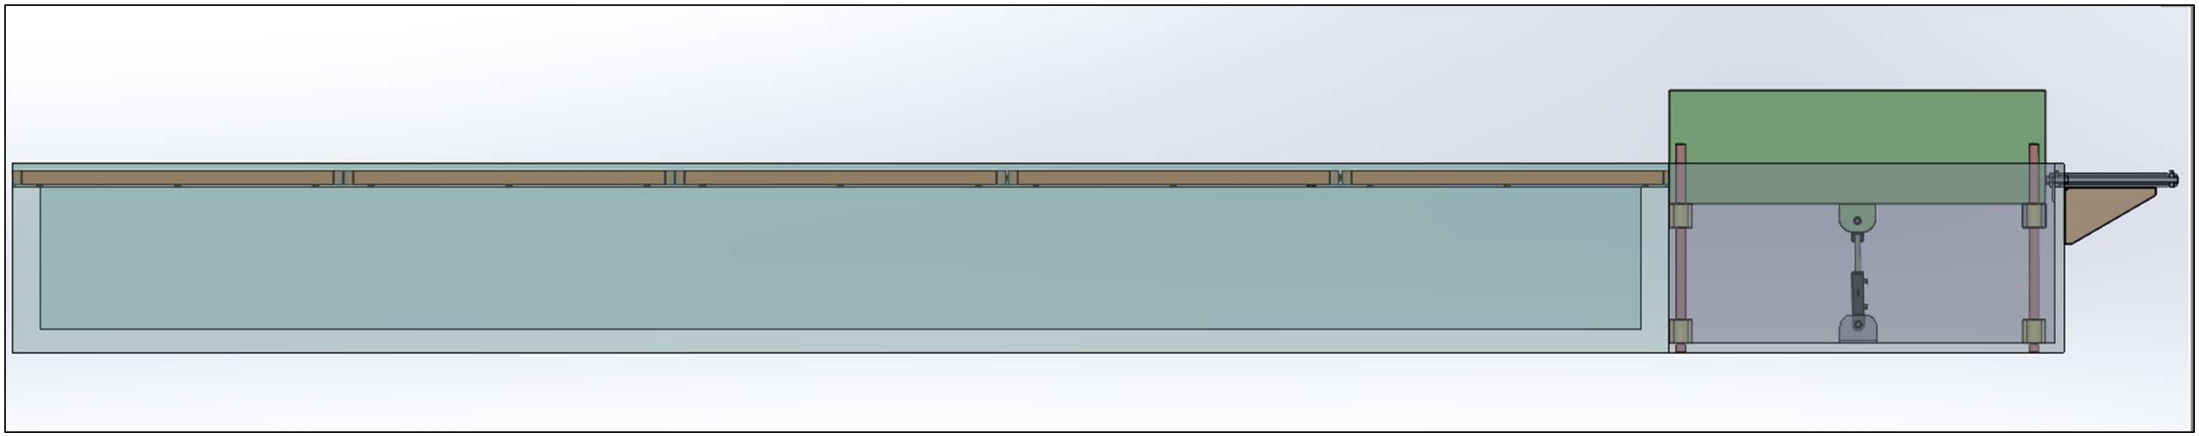

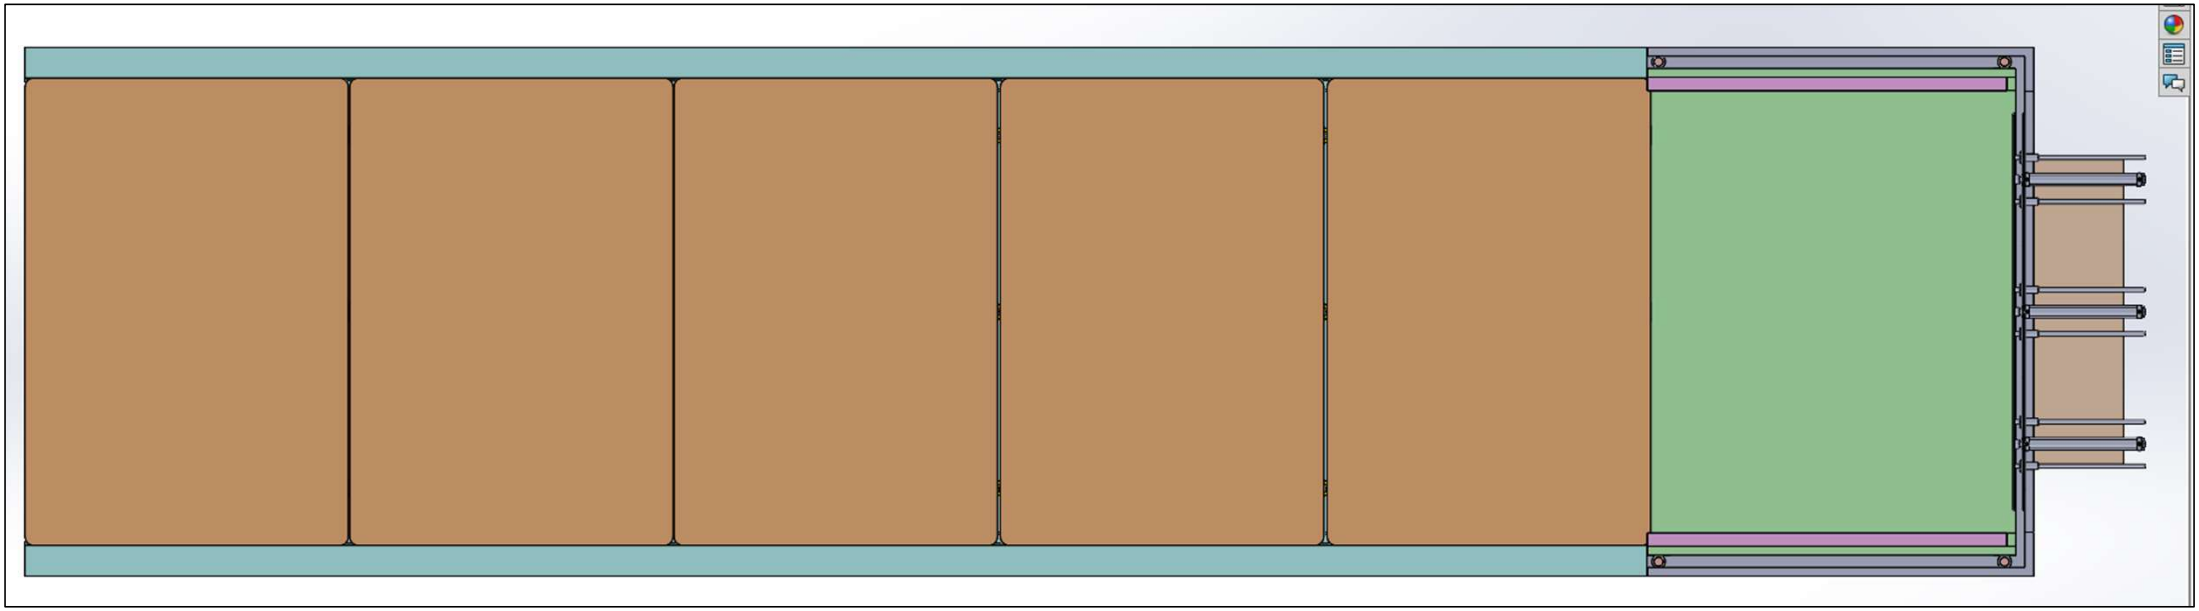

NIHVA

NIHVA Technologies Pvt. Ltd.

THANK YOU!