

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2500	3000	560	400	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2525	3025	565	

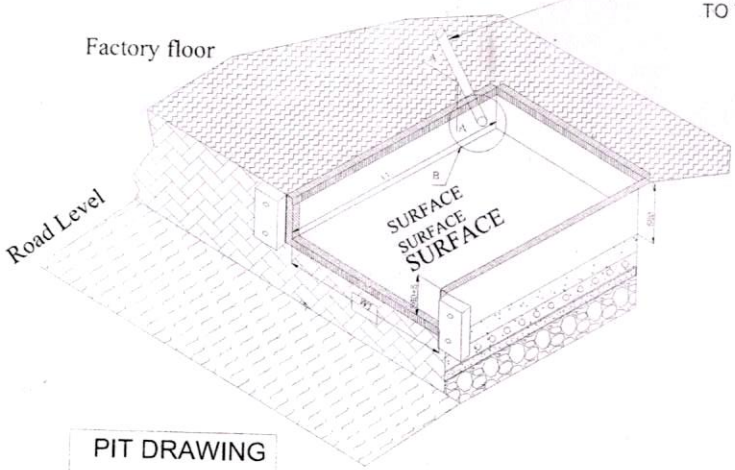


PIT DRAWING

TRUNCH FOR SUPPLY CABLE 4" DIA FROM PANEL POSITION (CUSTOMER TO DECIDE) TO THE BOTH SIDE BOTTOM OF PIT.

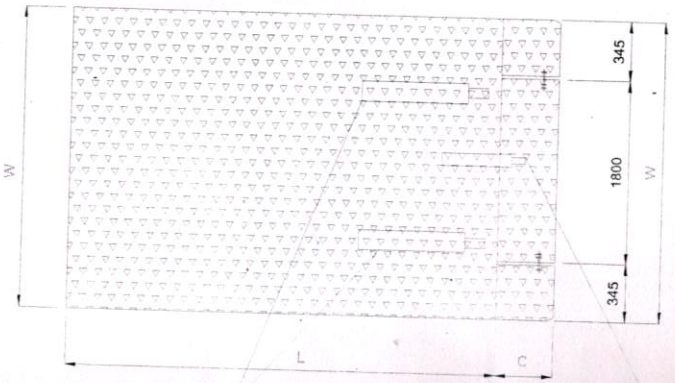

DECK CYLINDER 02 NOS

LIP CYLINDER 1 NOS

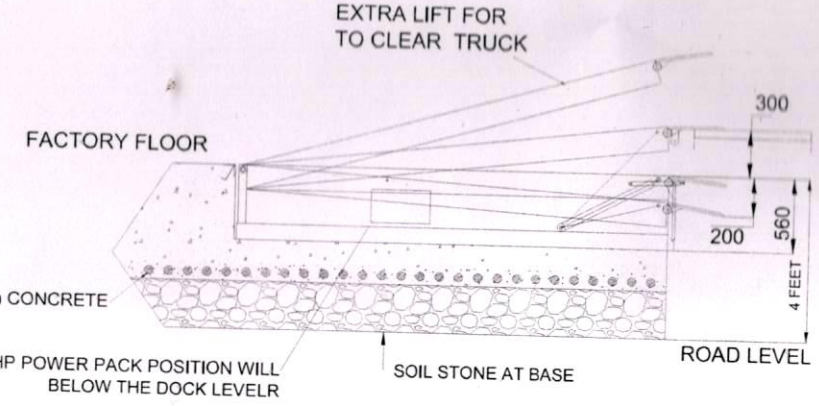



Motor - 1 H.P & Control Panel should be flame proof.

Remark - Hydropack & panel Should be mounted Separately near the dockleveller (Not Below)

AEGIS INFRASOLUTIONS (INDIA) PVT. LTD. Reg. No. 23622 Navi Mumbai

02/08/22



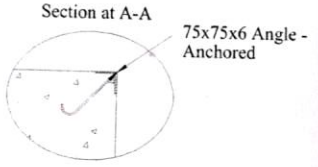

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 09 TON CAPACITY -03 Nos.

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

72/(5$1&(PP

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER - 9MT

	NAME	SIGN	DATE
DRAWN	SURAJ		25.07.2022
CHECK	P.A		25.07.2022
APPRD.	D. R.D		25.07.2022

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

CLIENT -Aegis Infrasolutions India Pvt Ltd

PROJECT -

SITE LOCATION - NAVI MUMBAI.

DWG. NO. : NIHVA/18-19/0190/R01 REV- R01

SCALE: NTS WT: SHEET: 01 OF 01