


OVERALL DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2000	2500	480	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2500	485	

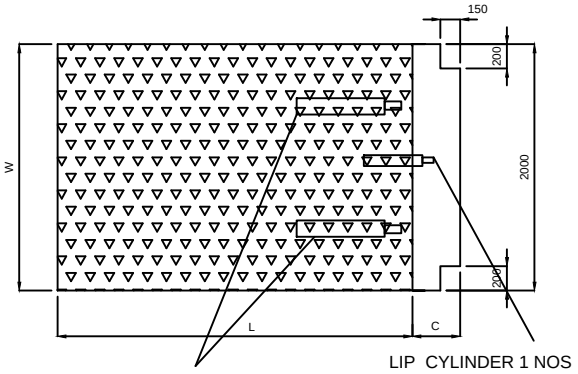


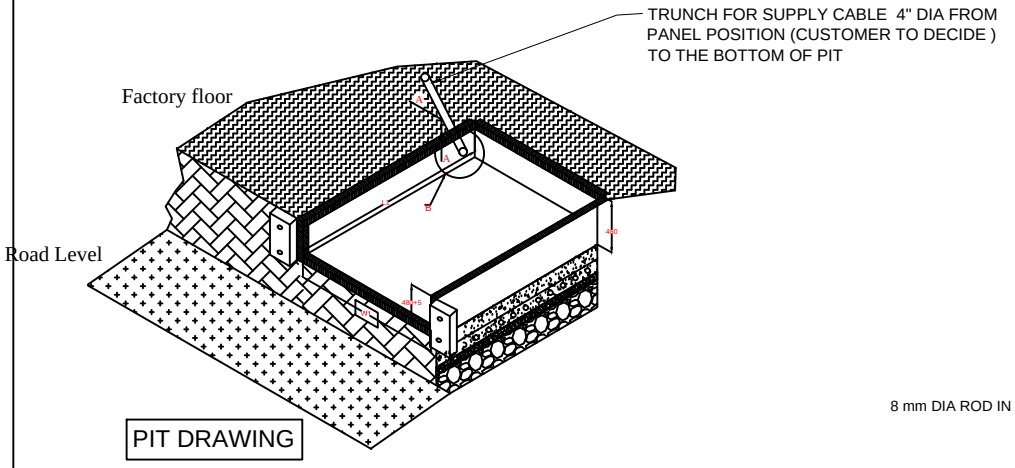

PIT DRAWING

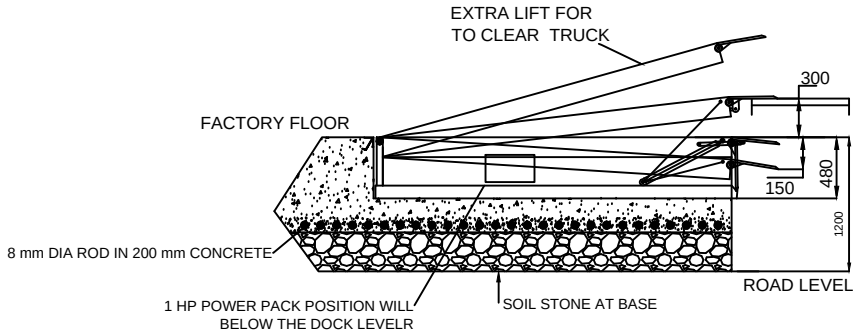





TOLERANCE :- ± 10mm

R01	SMS	27.3.2021	CAPACITY CHANGED TO 15 TON
REV NO	DRAWN	DATE	REMARK

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 20000 KG FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 15 TON CAPACITY UDL

IMP NOTE: -
1. PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2. CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	S.M.S.		25.1.2021
CHECK	R.K.		25.1.2021
APPRD.			

CLIENT - TOPBAND INDIA PVT LTD
PROJECT - TOPBAND INDIA PVT LTD
SITE LOCATION - PUNE
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/20-21/0143/R01 | REV- 01
ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: 01 OF 01