NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

CEAT Ltd
Village Road, Bhandup (W), Mumbai - 400078
Maharashtra -India.

Date : 24.08.2019
Quote NO : SQT.19.20.1970
Kind Attn : Mr. Avdhoot C. Poorje
Email Id : Avdhoot.Porje@ceat.com
Contact No: 9112173741

Project Name & Location:

Subject : Quotation for Dock Leveler

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer


Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**NIHVA Dock Leveler Capacity 10 Ton**	2000	2500	1	2,00,000	2,00,000	20,000	20,000
2	**Fixed Ramp** **• Capacity 10 Ton** **• Slope - 8 Degree**	2000	3450	1	1,35,000	1,35,000	10,000	10,000
				Total		**3,35,000**		30,000
4	P&F Charges			3%		**10,050**		
	Total Without Taxes					**3,45,050**		**30,000**
	GST Extra @ 18%					62,109		5,400
	Total With Taxes					**4,07,159**		**35,400**
5	Transportation Charges					**Extra at Actual**		
6	Unloading Charges @ Site					**At Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

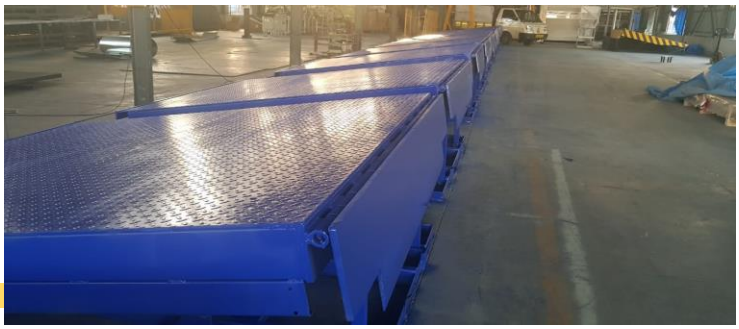

NIHVA Dock Leveler

Sr. No	Description	Specifications For 6 Ton
1	Model No	NDL20256T
2	Make	NIHVA
3	Required Capacity	10 Ton
4	Hydraulic Power pack	1 HP, 3PH
5	Control Panel	4 Push Button operated
6	Deck operation	By push button Deck UP & Deck Down
7	Lip operation	By push button Deck UP & Deck Down
8	Loading platform height from road Level	4 feet (1200 mm)
9	Travel above from Dock level height	350 mm
10	Travel below from Dock level height	200 mm
11	Deck platform size	2000mm (W) x 2500mm (L)
12	Lip sizes	400 mm
13	Clear Pit dimensions	2040mm (W) x 2500mm (L) x 485mm (H)
14	Drive type	Direct by electric Motor
15	Power Consumption	0.75 kw Motor
16	Degree of protection for motor	IP 55
17	Motor RPM	1410 rpm
18	Pump design flow	1.8 LPM
19	Pump pressure	200 bar
20	Safety valve set pressure	90 bar
21	Pump type	Gear
22	In built safety valve	Yes
23	Volume of oil receiver	8 Ltr
24	No of Deck Cylinders	2 Nos
25	Deck Plate Thickness	8 mm Chequered Plate
25	No of Lip Cylinders	1 No
25	Lip Plate	16 mm Thick Plate
26	Dock Bumpers	1 Pair included

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 5-6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Arjun Patil on 8551096333**

With Best Regards
Varsha
8551091333
For NIHVA Technologies Pvt Ltd