



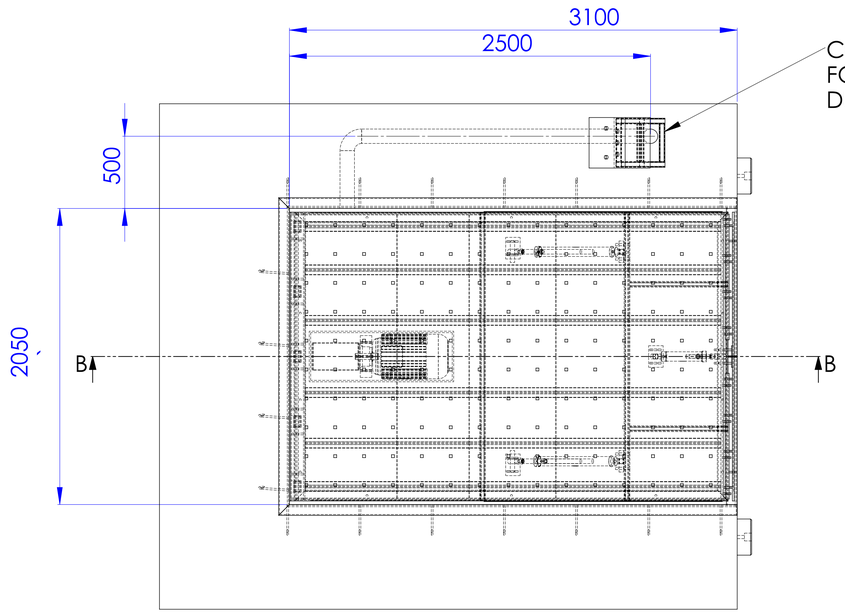


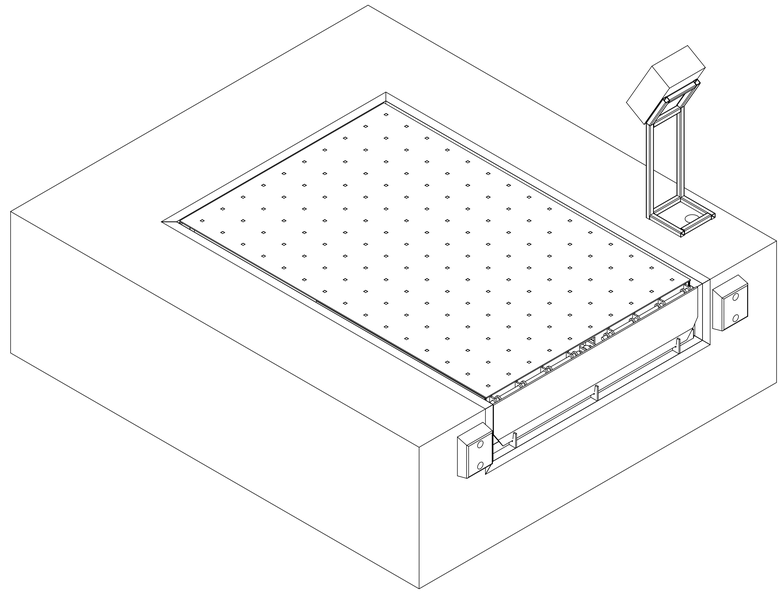


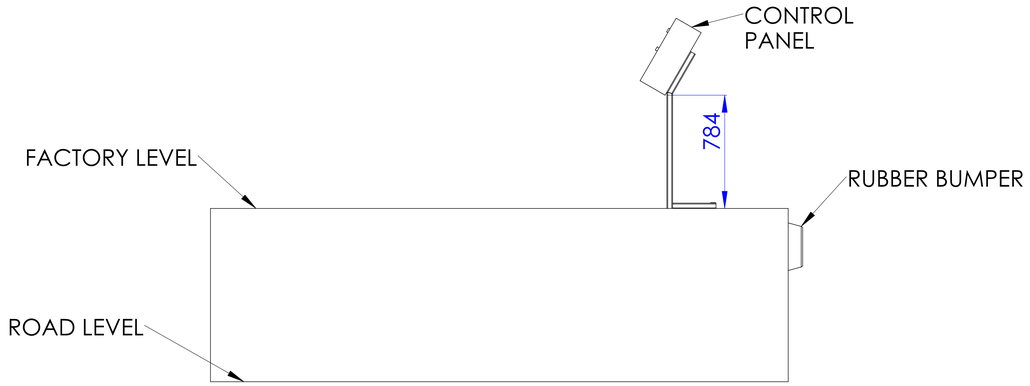

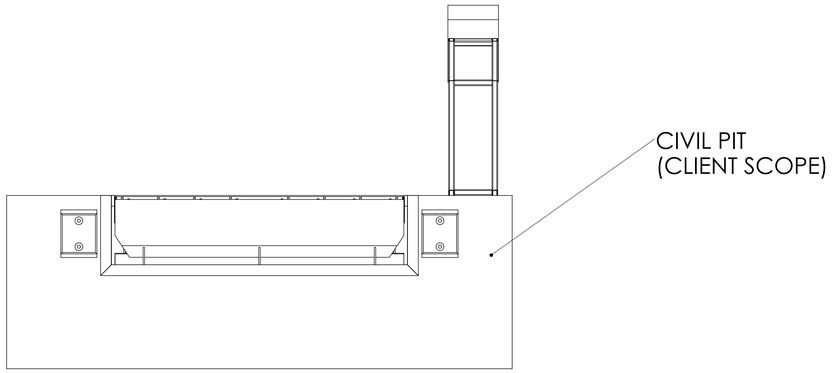

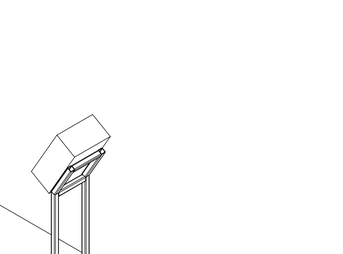

RUBBER BUMPER

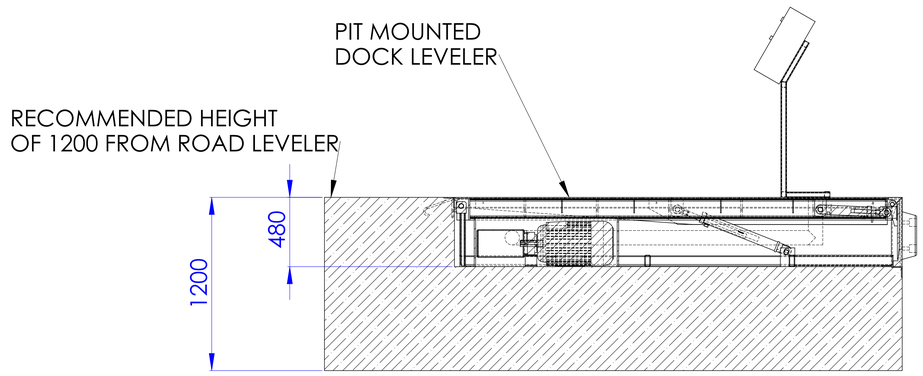

SECTION B-B
SCALE 1 : 15

NOTES -
1.DOCK LEVELER WILL BE INSTALLED AT SITE IN THE PIT & PIT IS IN CLIENT SCOPE .
2.REFER ATTACHED PIT DRAWING FOR CIVIL WORK .
3.REFER ATTACHED DOCKLEVELER SHEET FOR TECHNICAL SPECIFICATIONS .
4.DOCK LEVELER SIZE- 2000WX3000L
5.PIT SIZE- 2050WX3100LX480H
6.QTY -4 NOS
7.PLATFROM CAPACITY - 6 TON POINT LOAD 15 TON UDL

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

NIHVA
We Make Possible

DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING | REVISION: R00

CLIENT - SUBHASHREE ENGINEERING & CONSTRUCTIONS PVT LTD


	NAME	SIGNATURE	DATE
DRAWN	SIDDHESHWAR		29.6.2021
CHK'D			
APPV'D			
MFG			
Q.A.			


TITLE: DOCK LEVELER INSTALLATION LAYOUT


MATERIAL: M.S.

DWG NO: NTPL-DL-EH-LAYOUT-0000 | A0


WEIGHT: | SCALE:1:20 | SHEET 1 OF 1

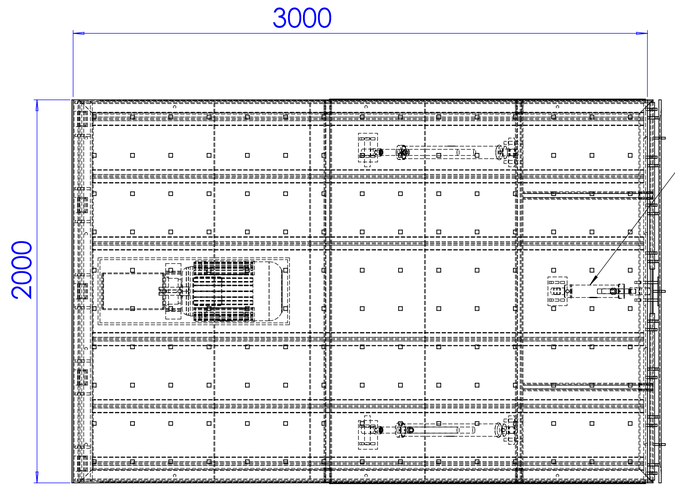


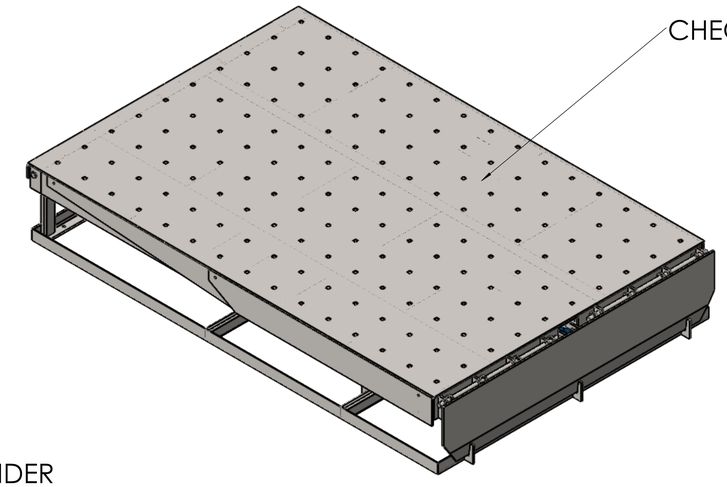


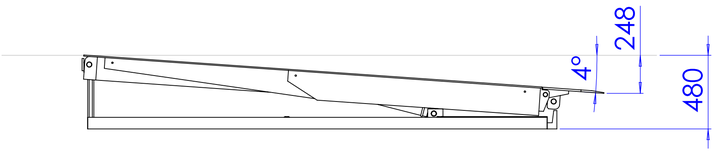

DECK DOWN (+)-250 MM

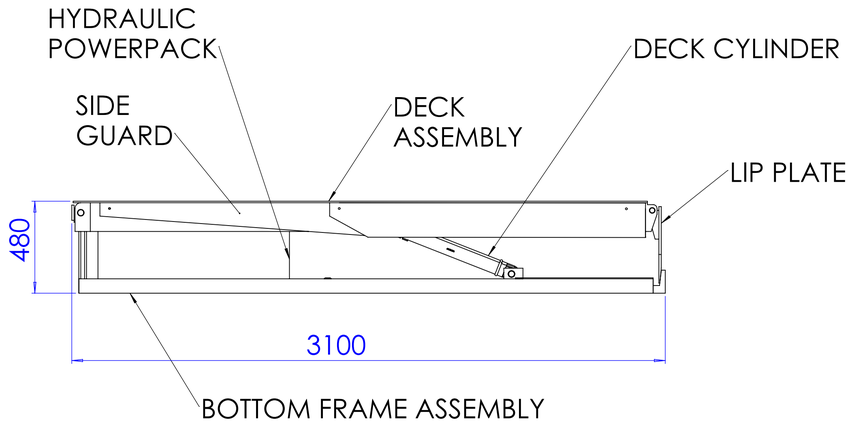

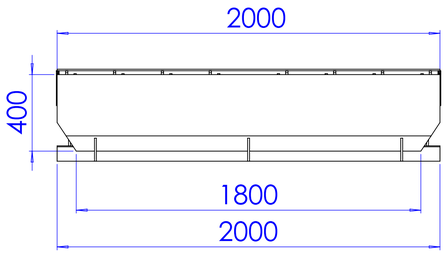

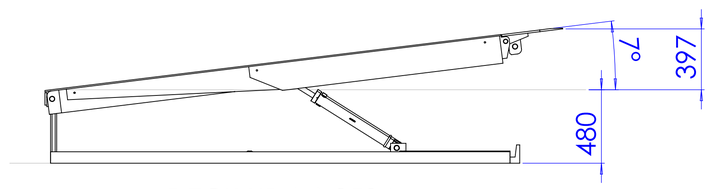

DECK UP (+)-350 MM

SPECIFICATIONS OF ELECTRO-HYDRAULI CDOCK LEVELER -

1. DOCK LEVELER SIZE - 2000WX3000L
2. CAPACITY - 6 TON POINT LOAD , 15 TON UDL
3. TRAVEL ABOVE - 350 MM
4. TRAVEL DOWN- 250 MM
5. LIP SIZE - 2000WX400L
6. SHUT HEIGHT - 480 MM
7. PIT SIZE - 2050WX3100LX480H
8. RECOMMENDED HEIGHT OF DOCK LEVELER TOP FROM ROAD LEVEL - 1200 MM
9. QTY - 4 NOS
10. OVERALL SIZE- 2000WX3100LX480H
11. DECK & LIP OPERATED BY HYDRAULIC CYLINDER
12. OPERATION CONTROL BY PUSH BUTTON OF CONTROL PANEL
13. DOCK LEVELER GROUTING BY ANCHOR WEDGE BOLT INSIDE PIT
14. HYDRAULIC POWERPACK - 3 PHASE AC , 1 HP
15. 2 NOS OF CYLINDER FOR DECK LIFTING & 1 NO OF CYLINDER FOR LIP PLATE OPERATION
16. PLATFORM - CHEQUERED SHEET OF SIZE 2000WX3000L
17. FINISH - HOT DEEP GALVANISING

NOTES-

1. REQUIRED PIT & ALL CIVIL WORK IS IN CLIENT SCOPE .
2. HYDRAULIC CYLINDERS & POWERPACK DESIGNED FOR LIFTING OF DECK WITH NO LOAD .DO NOT OPERATE DOCK LEVELER WITH LOAD ON DECK .
3. CONTROL PANEL IS PROVIDED WITH 5 METER LENGTH CABLE AS PER STANDARD .

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

NIHVA
We Make Possible

DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING | REVISION R00

CLIENT - SUBHASHREE ENGINEERING & CONSTRUCTIONS PVT LTD


	NAME	SIGNATURE	DATE
DRAWN	SIDDHESHWAR		29.6.2021
CHK'D			
APPV'D			
MFG			
Q.A			

TITLE: DOCK LEVELER


MATERIAL: M.S.


DWG NO: NTPL-DL-EH-DOCKLEVELERASS-0000 | A1

WEIGHT: | SCALE:1:20 | SHEET 1 OF 1

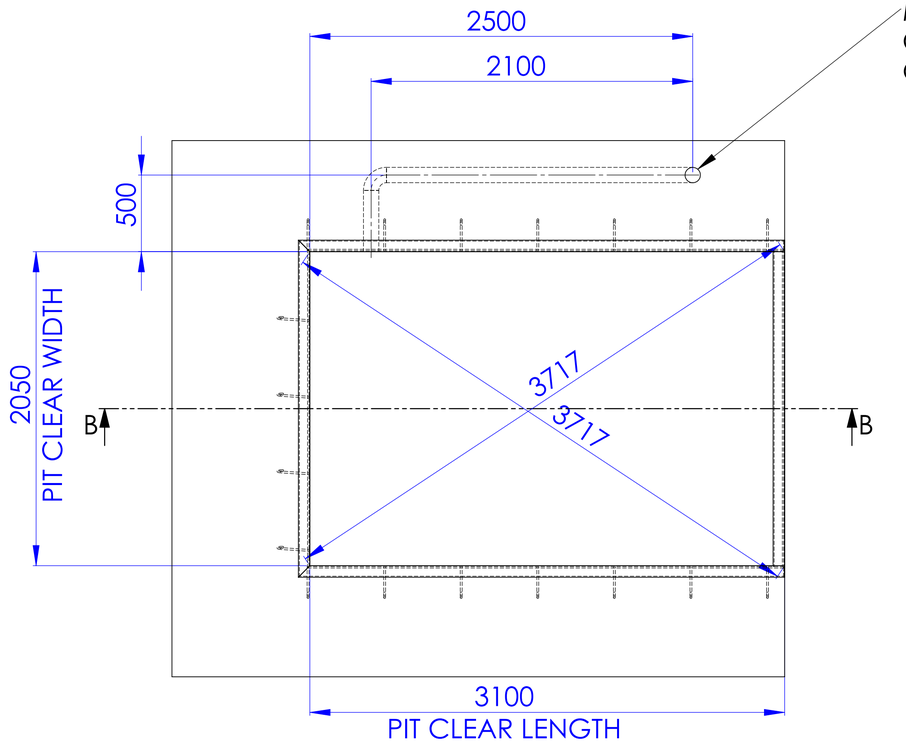


MINIMUM 4 INCH DUCT FOR CABLES FROM CONTROL PANEL TO PIT OPENING (DUCT IN CLIENT SCOPE)

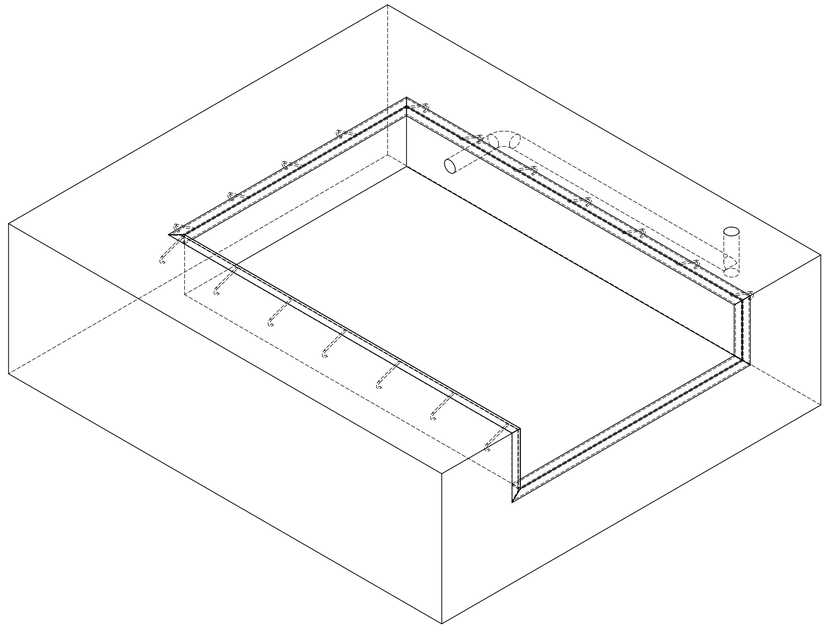


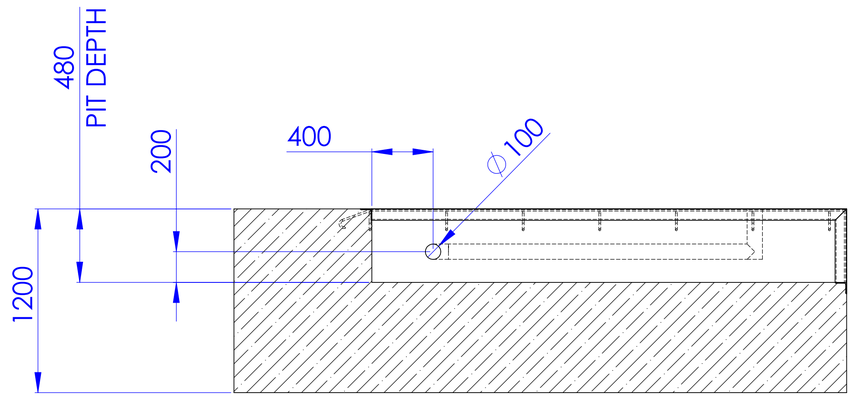

SECTION B-B

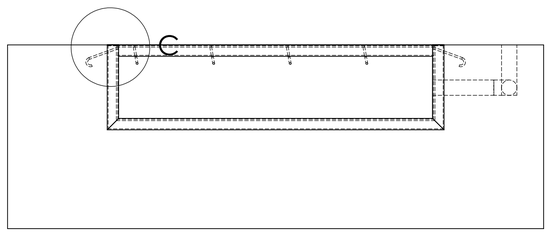

L ANGLE 75X6 TO BE ANCHORED

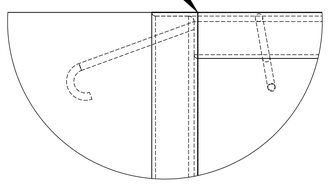

DETAIL C
SCALE 1 : 5

SPECIFICATIONS OF PIT -

1. ALL CIVIL WORK , REQUIRED DUCT FOR HOSES, L-ANGLE & PIT IS IN CLIENT SCOPE .
2. PIT SURFACE SHOULD BE PLAIN & TAKE ATLEAST POINT LOAD OF 6000 KG .
3. L ANGLE 75X6MM THK TO BE ANCHORED AT ALL CORNER OF PIT & ANGLE IS IN CLIENT SCOPE .
4. MINIMUM 4 INCH DUCT TO BE PROVIDED FROM CONTROL PANEL TO PIT OPENING AS PER GA DRAWING (DUCT IS IN CLIENT SCOPE)
5. CONTROL PANEL SHOULD BE LOCATED NEAR DOCK SO THAT OPERATOR ABLE TO SEE LIP RESTING ON VEHICLE .

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

NIHVA
We Make Possible

DEBURR AND BREAK SHARP EDGES

DO NOT SCALE DRAWING | REVISION R00

CLIENT - SUBHASHREE ENGINEERING & CONSTRUCTIONS PVT LTD

	NAME	SIGNATURE	DATE
DRAWN	SIDDHESHWAR		29.6.2021
CHK'D			
APPV'D			
MFG			
Q.A			

TITLE: PIT DRAWING

MATERIAL: M.S.

DWG NO. NTPL-DL-EH-PITASS-0000 | A1

WEIGHT: | SCALE:1:20 | SHEET 1 OF 1