

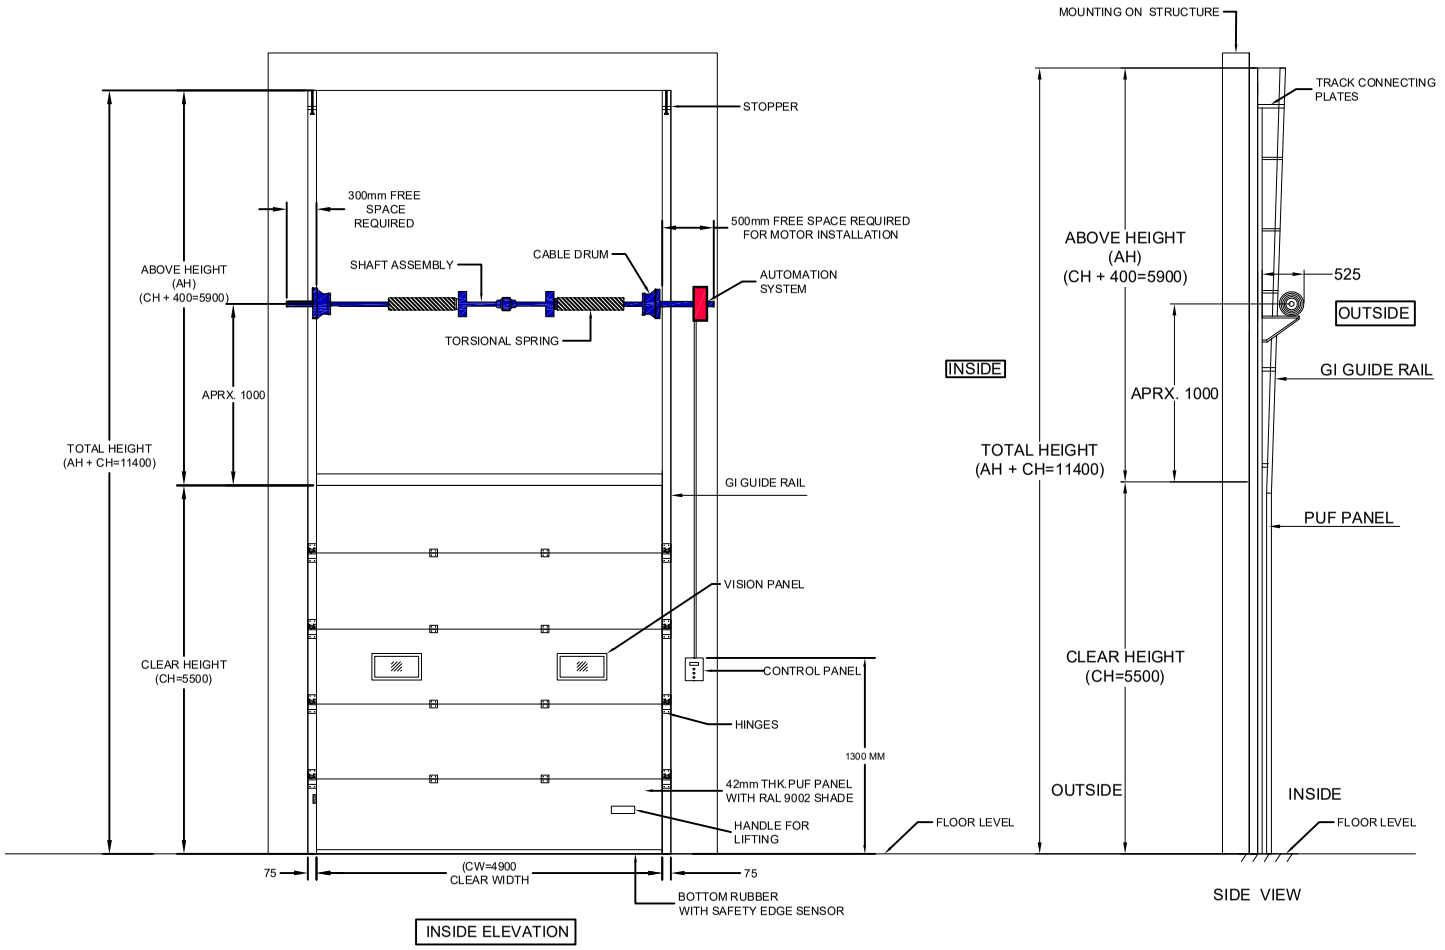


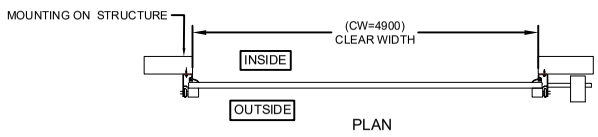

PLAN

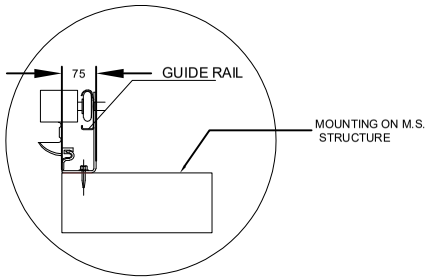

TRACK DETAILS

NOTE:-
1.All dimension are in MM
2.Required all civil work will be Client scope
3.Required structure will be client scope

DIMENSION :

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
4900 mm	5500 mm	01No

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC- FREE POLYURETHANE WITH 0.5mm THK, GI PRECOATED PANELS.
DOOR HINGE	——	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		PANELS WILL BE COLORED IN STANDARD RAL SHADE APPROVED BY CLIENT.

ACCESSORIES-
1. SAFETY EDGE SENSOR.
2. MANUAL ROPE.
3. SPRING BREAK DEVICE(SPRING FAILURE PROTECTION)
4.TWO WINDOWS.
5.ANY POINT STOP(DEADMAN CONTROL)

IMPORTANT NOTES:
1.SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
2.ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

VERTICAL SECTIONAL DOOR (SCISSOR LIFT)

CLIENT'S APPROVAL :

CLIENT -KAESER COMPRESSOR

PROJECT -

SITE LOCATION - PUNE

DWG. NO. : NIHVA/22-23/0190

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 0

	NAME	DATE	SIGN
DRAWN	S.B	13-01-2023	
CHECK	A.K.	13-01-2023	
APPROVAL	V.T.	13-01-2023	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.