


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2500	3000	560	400	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2525	3025	565	

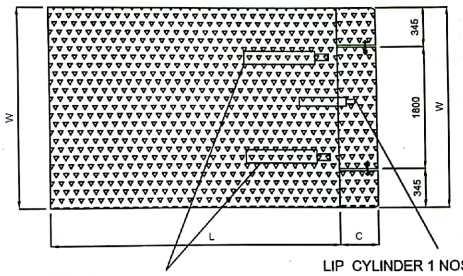

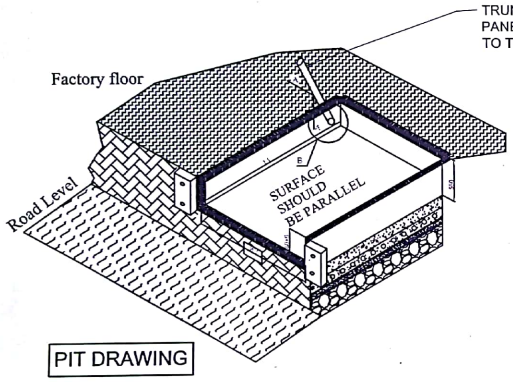



PIT DRAWING

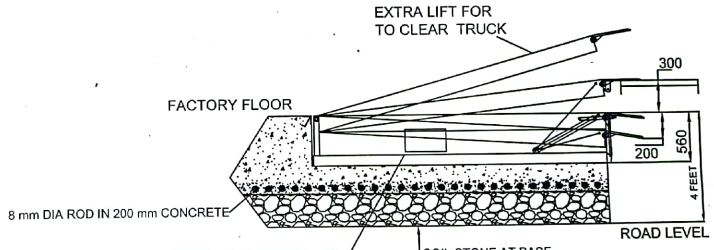

Motor - 1 H.P & Control Panel should be flame proof.

Control panel motor should be flame proof.





Approved. Amit 24/12/18

AEGIS INFRASOLUTIONS PVT. LTD. Reg. No. 240804

REV NO	DATE	DRAWN	REMARK
01	05.12.18	P.A	PIT SIZE CHANGE.

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 09 TON CAPACITY - 01 NO

IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

The drawing & design is the property of NIHVA TECHNOLOGIES Pvt. Ltd. and not be sold or copied to any other person

TITLE: DOCK LEVELER - 9MT

	NAME	SIGN	DATE
DRAWN	SURAJ		03.12.2018
CHECK	P.A		03.12.2018
APPRD.	R.D		03.12.2018

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT -Aegis Infra Solutions

PROJECT -

SITE LOCATION - NAVI MUMBAI.

DWG. NO. : NIHVA/18-19/0190/R01 | REV- R01

SCALE: NTS | WT: | SHEET: 01 OF 01

Scanned by CamScanner