

DRAWING

CELL - 01

LH MOTOR MOUNTING
QTY = 01

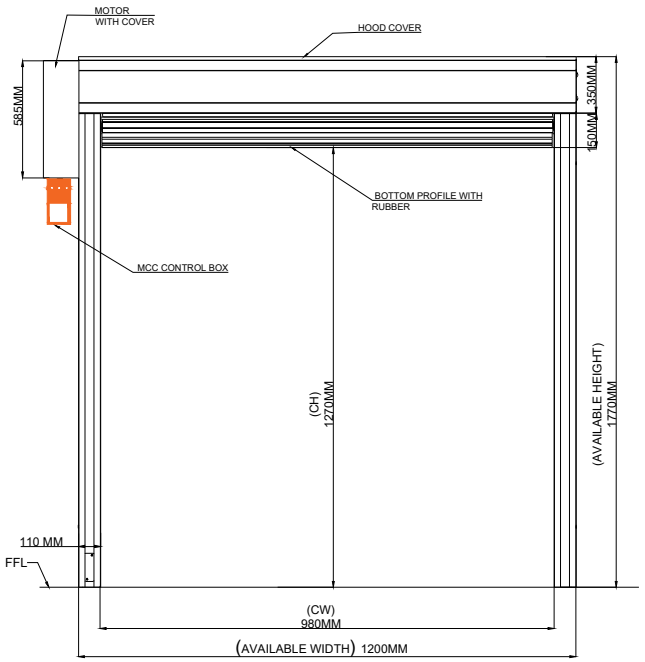

RH MOTOR MOUNTING
QTY = 01

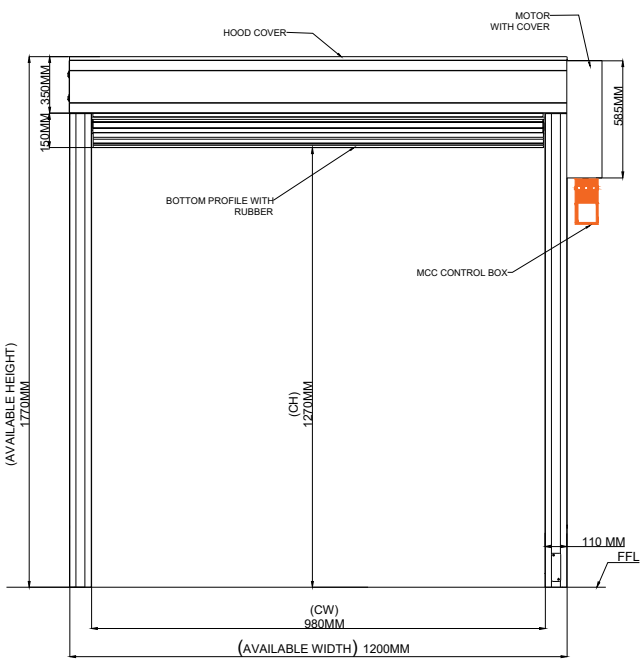

TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	DOOR VISION	VERTICAL RAPID ROLLER DOOR FOR MACHINE PROTECTION
2	SIDE FRAMES	AL ANODIZED 2 PART WHICH HAVE EASY ACCESS TO SERVICE & SWITCH
3	BOTTOM BEAM	AL ANODIZED
4	DOOR TRAVEL SPEED	OPENING: UPTO 2.5M/SEC & CLOSING: 1.7 M/SEC
5	RAL CODE	ORANGE
6	CONTROL SYSTEM	CONTROL SYSTEM MCC7110 VECTOR CONTROL, INCL. DISPLAY & BLACK MAIN SWITCH IN COMBIBOX
7	SAFETY LIMIT SWITCH	1 PC SCHMERSAL MAGNET SWITCH BAS 33-02z-2187 ST + MAGNET BPW 33-2326 MOUNTED IN SIDE FREAM
8	PRE-RUNNING PHOTOCELL	BOTTOM BEAM WITH PRE-RUNNING PHOTOCELL (WITHOUT CONTACT EDGE) WITH CABLE CHAIN INSIDE FRAME (ONLY AVAILABLE WITH MCC CONTROL)
9	INTERFACE CARD	MCC WITHOUT DISPLAY UNIT, WITH COMBIBOX IN PLASTIC (175X250X150MM) WITH INTERFACE CARD AND MAIN SWITCH INCLUDED IN COMBIBOX INCLUDING POWER & INTERFACE CABLE.

MACHINE PROTECTION DOOR SIZES :-

SR	AVAILABLE WIDTH	AVAILABLE HEIGHT	QTY
1	**1200**	**1770**	02

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**980**	**1270**	02

NOTE : All DIMENSIONS ARE IN MM.
STU. IN CLIENT SCOPE.

SPECIAL INSTRUCTION'S :

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR AUTOMATION

DWG NO - NTPL-315-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE	PRODUCT - MACHINE PROTECTION DOOR	
DRAWN	J.P.		09-12-2025	PROJECT NO - NTPL- 315	REVISION - 00
CHK'D	B.S.		09-12-2025	SITE LOCATION - GURUGRAM	
APPV'D	V.T.		09-12-2025	MATERIAL -	QTY - 1
IF ANY QUERIES CONTACT - Design@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'		A2			SHEET 1 OF 1