

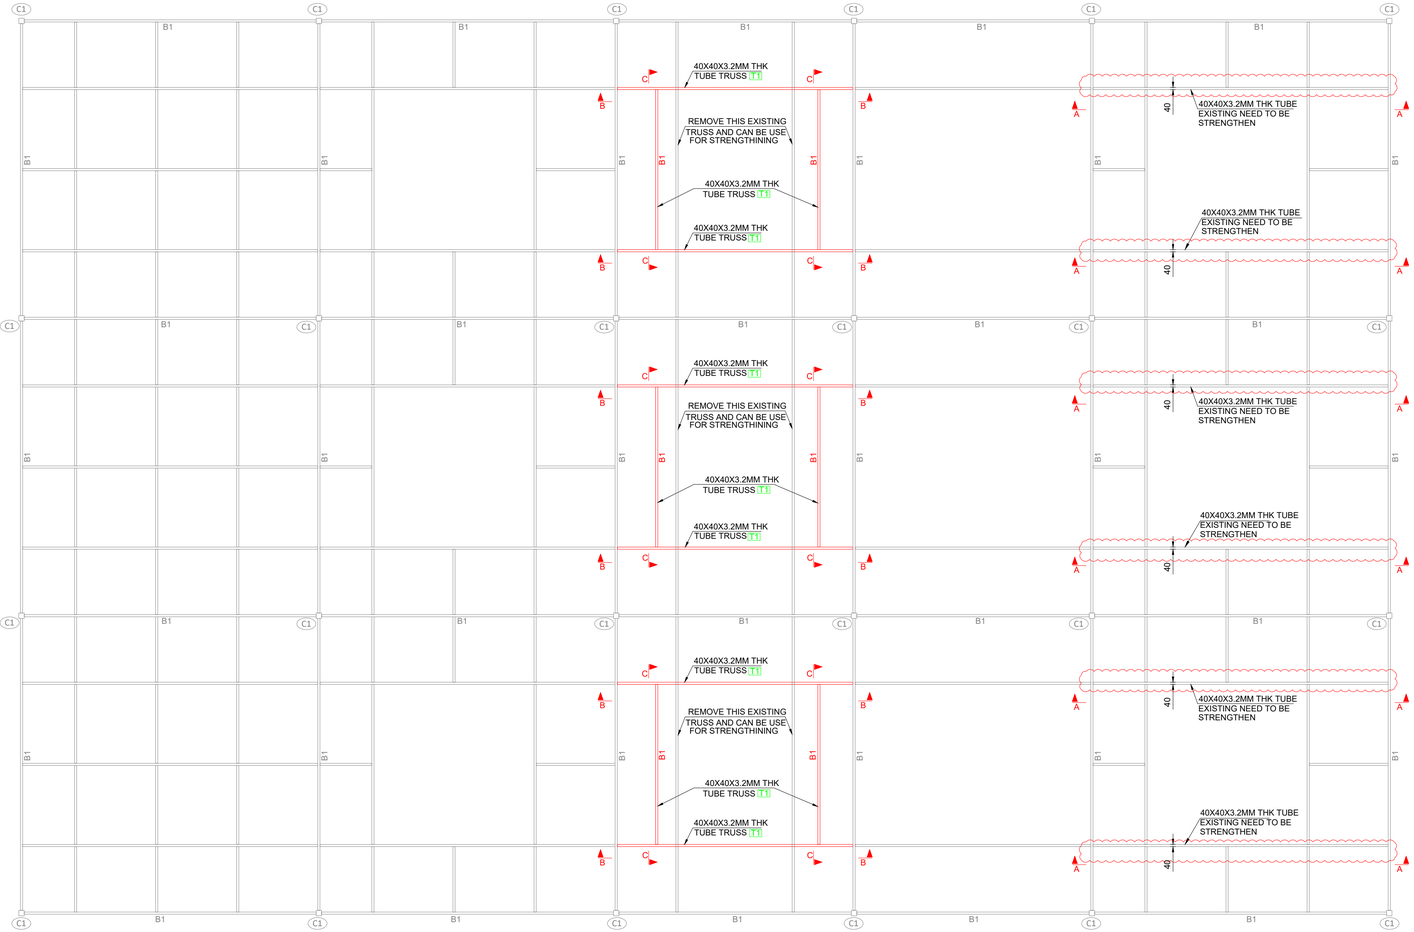



ROOF PLAN

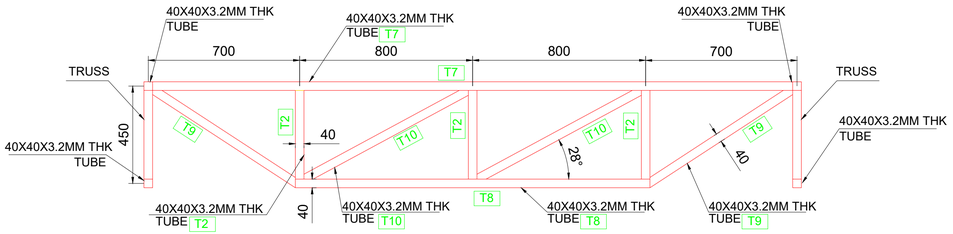



SECTION C-C

| QUANTITY FOR VERTICAL WINDING MACHINE ROOF | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| ITEM No. | DESCRIPTION | WD. mm | LG. mm | UNIT WT. (kg/m) | QTY. | WEIGHT IN kg. | | REMARKS |
| | | | | | | UNIT | TOTAL | |
| T-1 | TUBE 40x40X3.2THK | | 580.00 | 3.49 | 120 | 2.02 | 242.90 | TUBE |
| T-2 | TUBE 40x40X3.2THK | | 410.00 | 3.49 | 120 | 1.43 | 171.71 | TUBE |
| T-3 | TUBE 40x40X3.2THK | | 654.00 | 3.49 | 6 | 2.28 | 13.69 | TUBE |
| T-4 | TUBE 40x40X3.2THK | | 5460.00 | 3.49 | 6 | 19.06 | 114.33 | TUBE |
| T-5 | TUBE 40x40X3.2THK | | 4360.00 | 3.49 | 12 | 15.22 | 182.60 | TUBE |
| T-6 | TUBE 40x40X3.2THK | | 514.00 | 3.49 | 6 | 1.79 | 10.76 | TUBE |
| T-7 | TUBE 40x40X3.2THK | | 2960.00 | 3.49 | 6 | 10.33 | 61.98 | TUBE |
| T-8 | TUBE 40x40X3.2THK | | 1640.00 | 3.49 | 6 | 5.72 | 34.34 | TUBE |
| T-9 | TUBE 40x40X3.2THK | | 788.00 | 3.49 | 12 | 2.75 | 33.00 | TUBE |
| T-10 | TUBE 40x40X3.2THK | | 884.00 | 3.49 | 12 | 3.09 | 37.02 | TUBE |
| | | | | | | Total = | 902.35 | |

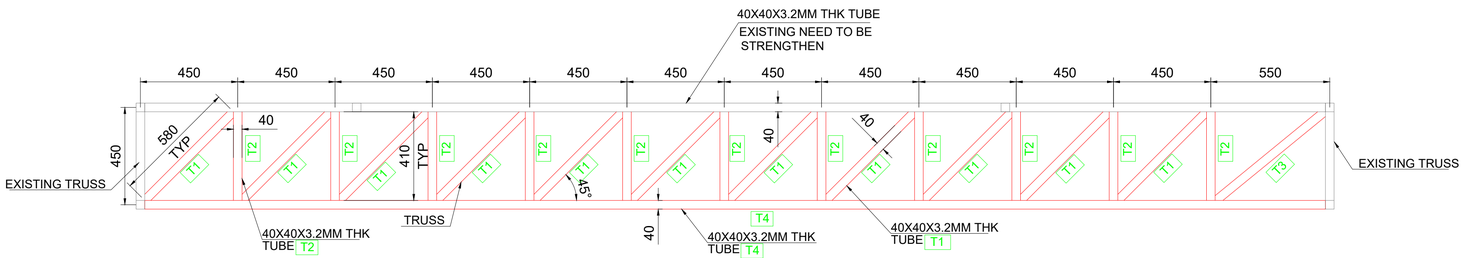


SECTION A-A

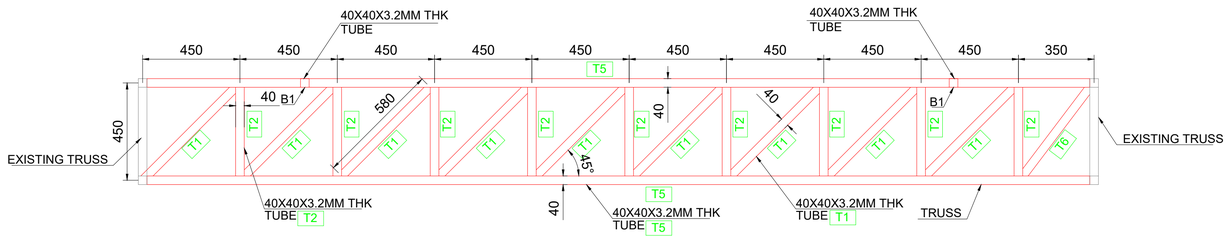


SECTION B-B

## GENERAL NOTES :–

1. ALL DIMENSIONS ARE IN MM AND LEVELS ARE IN METERS
2. ALL STRUCTURAL STEEL AS PER IS:2062.
3. PROVIDE WELDING AS PER IS:816.
4. PROVIDE MIN. 5MM WELD.
5. USE ELECTRODS AS PER IS:814 (PT.-I).
6. FILLET/ BUTT WELD SHALL BE OF 5MM SIZE AND SHALL BE CONTINUOUS.
7. FABRICATION AND ERECTION SHALL BE AS PER IS:800 AND IS:803.
8. WELD SHALL BE GROUND SMOOTH.
9. ALL GUSSET PLATES SHALL BE MIN. 5 THK.
10. ALL M.S. BLACK BOLTS AND NUTS SHALL CONFORM TO IS:1363(PT. 1 TO 3).
11. STRUCTURE SHALL BE APPLIED WITH ONE COAT OF RED OXIDE ZINC CROMATE PRIMER AFTER FABRICATION FOLLOWED ONE MORE COAT BEFORE ERECTION. FINALLY APPLY 2 COATS OF SYNTHETIC ENAMAL OF APPROVED QUALITY.

CLIENT - T&R (INDIA) LTD GUJARAT

transformers & rectifiers (india) ltd

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

SALT Design Services

SALT DESIGN SERVICES
(ASSOCIATE TO NIHVA TECHNOLOGIES PVT.LTD)

| | NAME | SIGNATURE | DATE |
|---|---|---|---|
| DRAWN | S.S.B | | 24.09.2024 |
| CHK'D | Y.M.J | | 04.09.2024 |
| APPV'D | H.A.B | | 04.09.2024 |

if any queries contact - supportautomation@nihva.com

ALL DIMENSION ARE IN mm | A0

TITLE - VERTICAL WINDING MACHINE STRENGTHENING DETAILS DWG

PRODUCT :- VERTICAL WINDING MACHINE

SITE LOCATION - GUJARAT

REVISION - REV_00

SCALE - 1.1 | SHEET 1 OF 1