

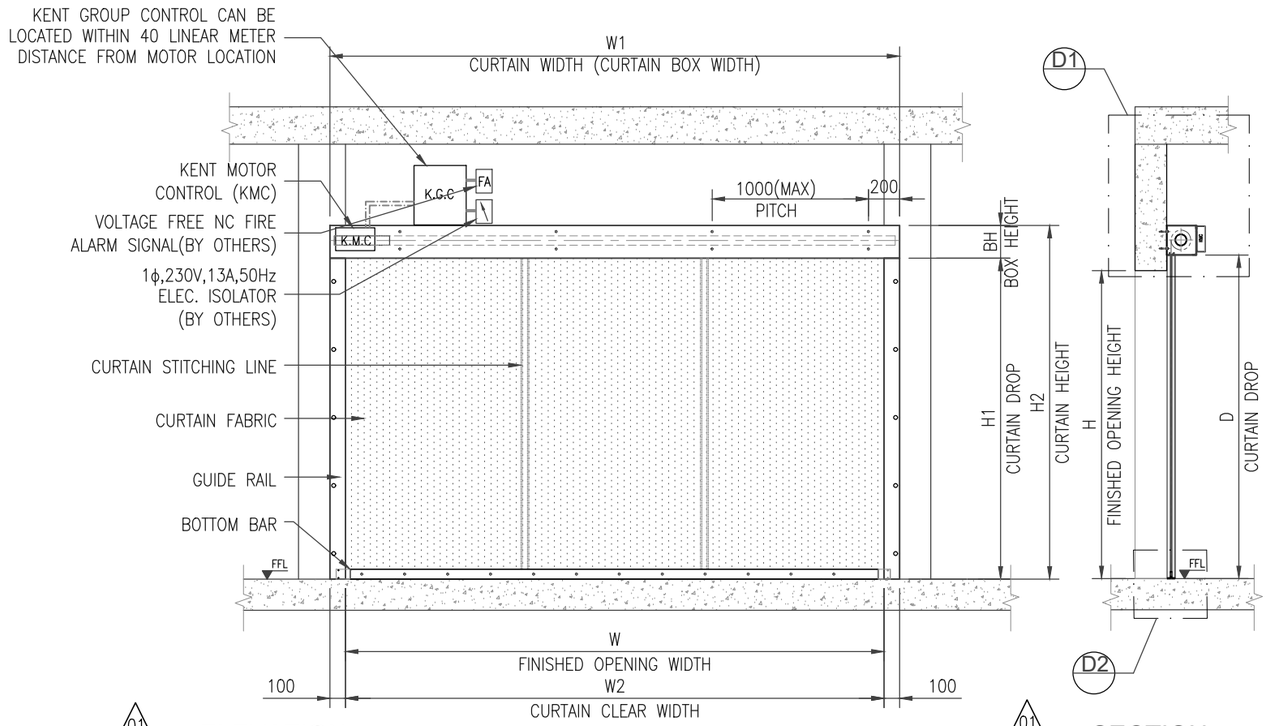


01 A – ELEVATION
SCALE: NTS


01 B – SECTION
SCALE: NTS

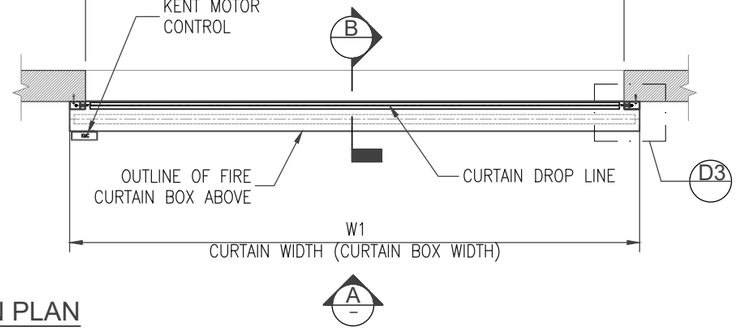


CURTAIN PLAN
SCALE: NTS

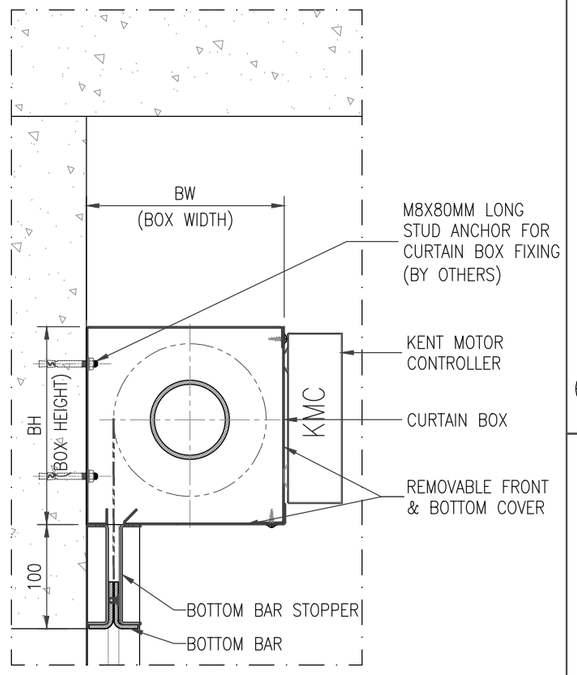

01 D1 – ENLARGED DETAILS OF BOX CURTAIN
SCALE: NTS

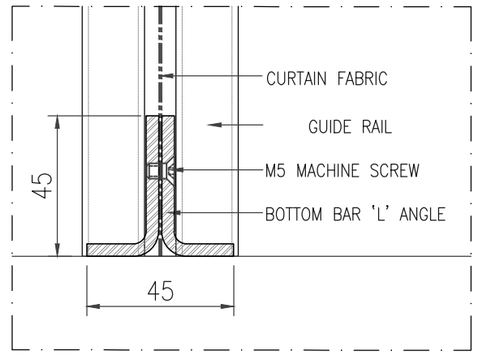

D2 – ENLARGED DETAIL OF BOTTOM BAR
SCALE: NTS

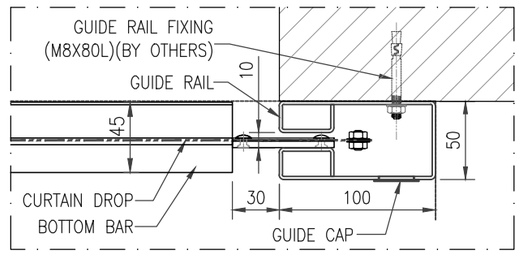

D3 – ENLARGED DETAIL OF GUIDE RAIL
SCALE: NTS

FIRE CURTAIN SPECIFICATION:

CURTAIN	MANUFACTURED FROM WIRE REINFORCED, WOVEN GLASS FIBRE, FABRIC COATED ON EACH SIDE WITH POLYURETHANE (VWG-520)
BOTTOM BAR	45x23x4.7mm THK STEEL BOTTOM BAR POWDER COATED FINISH RAL TO BE CONFIRMED
BOX COVER	1.2mmTHK GALVANISED STEEL FINISH POWDER COATED FINISH RAL TO BE CONFIRMED
END PLATE	3mmTHK GALVANISED STEEL END PLATES AND BRACKETS
GUIDE RAIL	2mmTHK GALVANISED STEEL POWDER COATED FINISH RAL TO BE CONFIRMED
MOTOR	INTERNAL, ELECTRIC, TUBULER GEARED CONSTANT SPEED MOTOR
POWER SUPPLY	SINGLE PHASE, 230V,5A MIN,50Hz
FIRE ALARM SIGNAL	VOLTAGE FREE N.C SIGNAL

01

2HRS FIRE RATED FIRE CURTAIN - SCHEDULE

S.NO	SHUTTER REF.	LOCATION	QTY	WIDTH W	WIDTH W1	WIDTH W2	HEIGHT H	HEIGHT H1	HEIGHT H2	CURTAIN BOX SIZE BW	CURTAIN BOX SIZE BH	MOTOR LOCATION	FINISH	REMARKS
1	FC-1	–	1NO	4000	4200	4000	4500	4600	4810	210	210	LEFT	TBC	
2	FC-2	–	7NOS	3000	3200	3000	4500	4600	4810	210	210	LEFT	TBC	
3	FC-3	–	8NOS	2000	2200	2000	4500	4600	4810	210	210	LEFT	TBC	

NOTE:
ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.

Rev.	Date	By	Description	Checked	Approved
1	12.11.2024		AS PER COMMENTS		
0	19.10.2024		FOR APPROVAL		

FERCO SHUTTERS AND SEATING SYSTEMS PVT LTD
Survey No.8/1A2B,8/2A2, Industrial Shed, Parivakkam Road, Senneerkuppam, Poonamallee, Chennai 600056.

Main Contractor: NIHVA Technologies PVT Ltd

Designed MTK | Checked | Approved
Scale N.T.S | Drawn MTK | Date 19.10.2024

Project Title : PEPSI CO GUJARAT

Drawing Title : 2HRS FIRE CURTAIN PLAN, ELEVATION, SECTION & DETAILS

Drawing No. : FER-NTP-FC-SD-001 | Rev. 01 | Sheet 1 of 1

CAD File Name :FER-NTP-FC-SD-001_1.dwg | A3

File Path: D:\Shared-Design1\Projects dwgs - 2024\NIHVA TECH - FIRE CURTAIN (BS STD)

PRINTEDDATE