NIHVA
NIHVA Technologies Pvt. Ltd.

NIHVA SALES QUOTATION – SQT.21.22.3080R5

Project – Airport Village, Hyderabad

Product – Vertical sliding windows

To,

Mr. Sandeep,

L&T Construction,

Hyderabad

Date – 17/06/2021

Thank you for your opportunity and trust shown on “NIHVA” your preferred partner for innovative solutions. This has reference to your above-mentioned requirement, please find below our Solutions.

Vertical sliding windows

Operational Technique

The AL frame installed with glass glazing are divided into multiple panels as per requirement. With one touch of remote these panel sliding onto each other and stack at one point which is defined on the site. The structure is completely sealed with PVC find and gasket.



NIHVA
NIHVA Technologies Pvt. Ltd.



Technical Specifications


S.NO.	TECHNICAL SPECS	VERTICAL SLIDING WINDOW
1	**Frame material**	Aluminuim Grade 6063 T6
2	**Frame profile size**	40mm X 42mm
3	**Guide Size**	70mm X 217mm (6000mm X 4000mm), 70mm X 163.5mm (6000mm X 2000mm)
4	**Glazing material**	Glass or Polycarbonate
5	**Glazing thickness**	8mm Glass or 10mm Polycarbonate
6	**Motorisation**	220VAC Single phase 50/60hz
7	**Activation System**	Wireless remote control (MC200 receiver 50hz)
8	**Motor mounting**	Top mount motor
9	**Motor mounting space**	163mm X 192mm
10	**Finish**	Electrostatic baked on powder coating
11	**Standard RAL**	RAL 8003, RAL 9005, RAL 9010, RAL 1019, RAL 7016, RAL 8014, RAL 9006, RAL 7024
12	**Weather seals**	Silent fin, brush pile with PVC fin & EPDM gasket
13	**EN standard & Certification**	EN 12208 (Water tightness) EN 12210 (Resistance to safety load) EN 12207 (Air permeability) EN 12210 (Resistance to wind load)

NIHVA Technologies Pvt. Ltd.

System Representation

AREA 6000 MM X 2000 MM



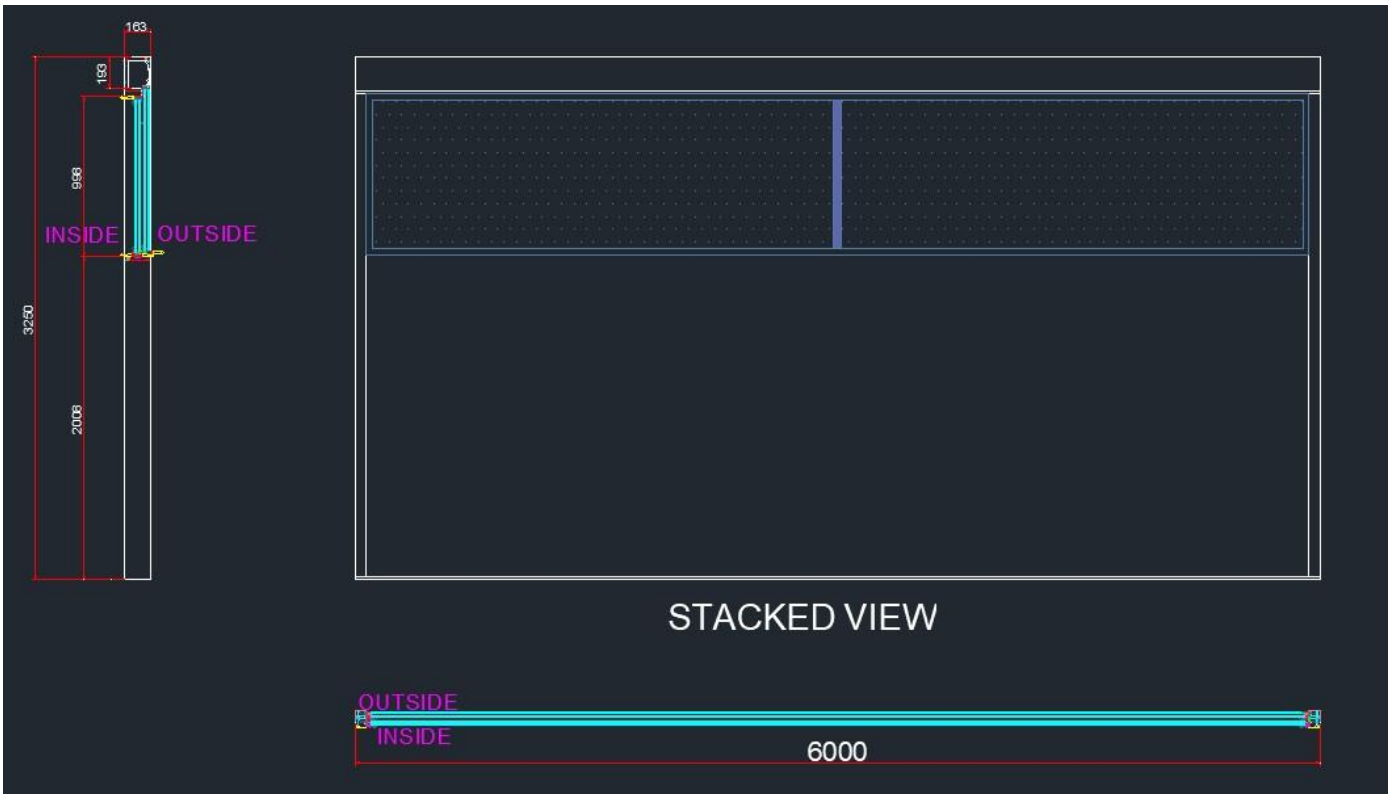



NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom,
Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company
GST Pune: 27AAECN0437H1ZM

NIHVA
NIHVA Technologies Pvt. Ltd.

AREA 6000 MM X 4000 MM

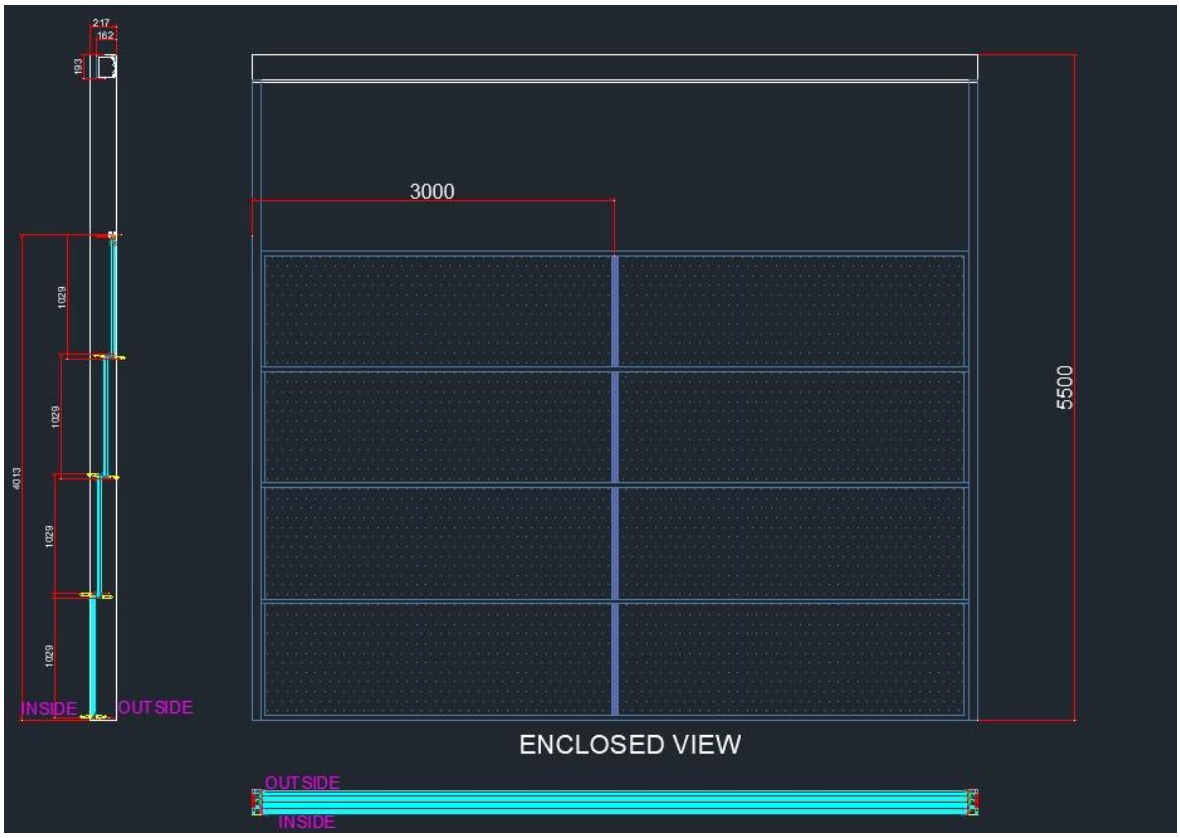

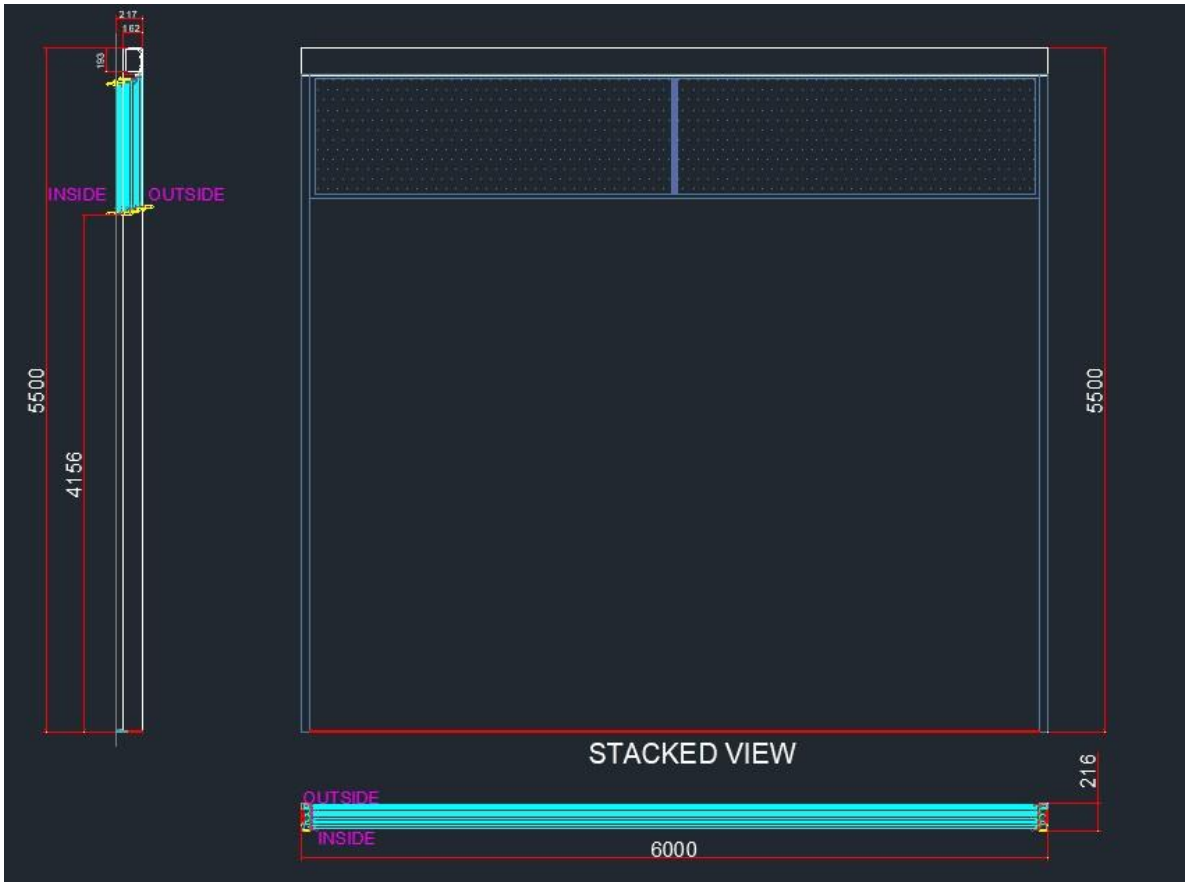

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom,
Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company
GST Pune: 27AAECN0437H1ZM

Scope of work -

- Design, Mfg, Supply, Installation and Commissioning of Vertical Sliding Window
- Supply and Installation of Polycarbonate sheet
- Loading & Unloading

Commercial Details -

PRODUCT	SIZE	QTY	Supply & Installation Price in Rs / each	Total Amount Supply and Installation in Rs
VERTICAL SLIDING WINDOW	6000mm(W) X 4000mm(H)	10	₹ 27,65,300	₹ 2,76,50,000
	6000mm(W) X 2000mm(H)	10	₹ 17,40,300	₹ 1,74,00,000
Total without Tax		20		**₹ 4,50,50,000**
GST Extra	18%			₹

Non – Comprehensive AMC –

Sr. No	Description	Product Qty (Nos)	No. of Visit/Year	AMC Value 1st Year	AMC Value 2nd Year	AMC Value 3rd Year
1	(w)6m x (h)4m	10	3	6,00,000	6,90,000	8,30,000
2	(w)6m x (h)2m	10	3	3,00,000	3,45,000	4,15,000
	Total Value			9,00,000	10,35,000	12,45,000

Terms:

1 Total Visit: 3 /year for each door
2 Free Breakdown: 1 / year,
3 Emergency breakdown charges 15,500/- per day in contract period
4 Contract Period: as applicable
5 Height & Lifting equipment in client scope
6 Lubricants & consumable will be client scope
7 Spare parts if required will be supplied by client scope

General Terms & Conditions-

1. Continuous uninterrupted access to installation section or as agreed separately.
2. Provision of 230 Volt power supply (by others) for hand tools.
3. A dry and secure area, not in direct sunlight, is to be provided for storage of the product components.
4. Access to site between 7 am to 6 pm six days per week. If this is not possible, the installation programme may require amending.
5. Any storage costs for materials due to delays outside of NIHVA, will be in Client Scope.
6. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practices. We reserve the right to extend the period accordingly.
7. Any passes required for the project, are the responsibility of the Customer and Contractor and must be available, before commencement of the installation. Any delays caused by the non-availability of passes, will be charged accordingly.

Sr. No		Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

Terms & Conditions-

Price: Ex Works Pune

Delivery: Approximately 15 weeks from having received official order confirmation + advance payment + signed & stamp drawing approval

(subject to - Lead time might be impacted due to current global crisis of Covid -19)

Payment: 60% Advance along with confirmed Purchase order
30% against bill of lading document produced after material readiness
10% after material reached at site immediately

Validity: Validity of Offer is 15 days from the date of quotation.

Warranty: from date of supply -
5 Years for manufacturing defect on the structural system.
3 Years for mechanical and drive system.
2 Years for all electrical system.

Compensation Clause : Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA a compensation of 25% of order value.

Transportation : At Extra Cost

Please feel free to Contact Mr. Gaurav Jain on 9680117657 For any further Clarification Information in this Concern.

With Best Regards,
Shailesh Bhoir
+91-85510 91333
Nihva Technologies Pvt. Ltd.