
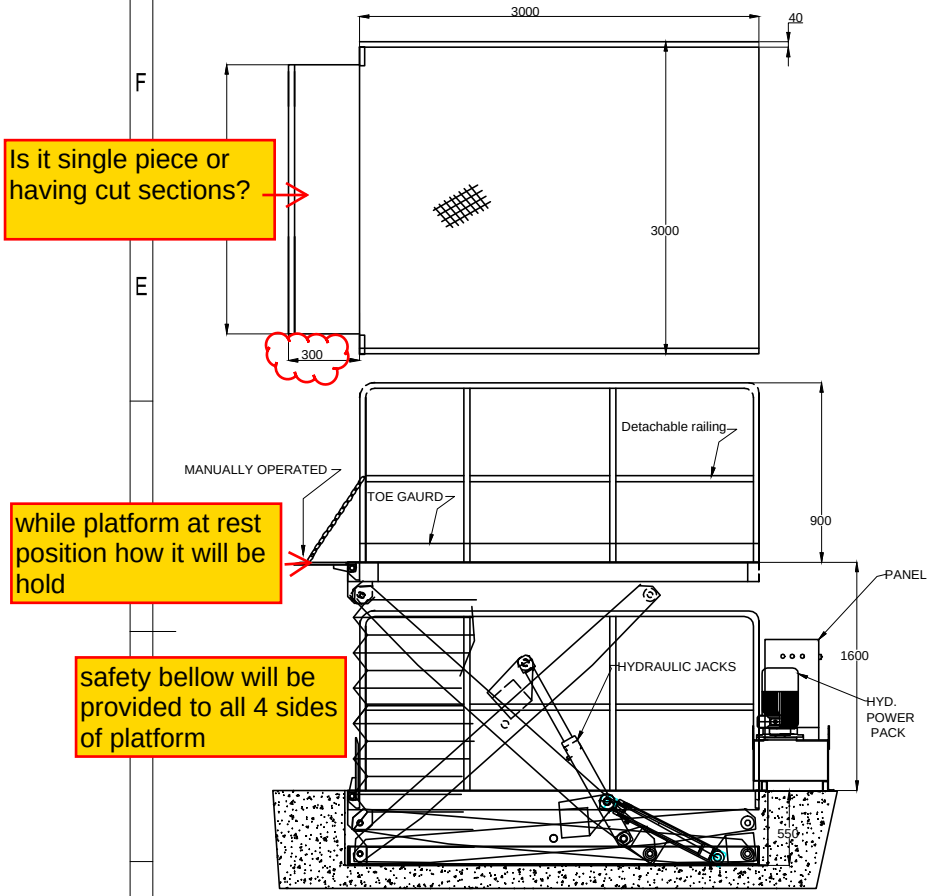



Is it single piece or having cut sections?

while platform at rest position how it will be hold

safety bellow will be provided to all 4 sides of platform

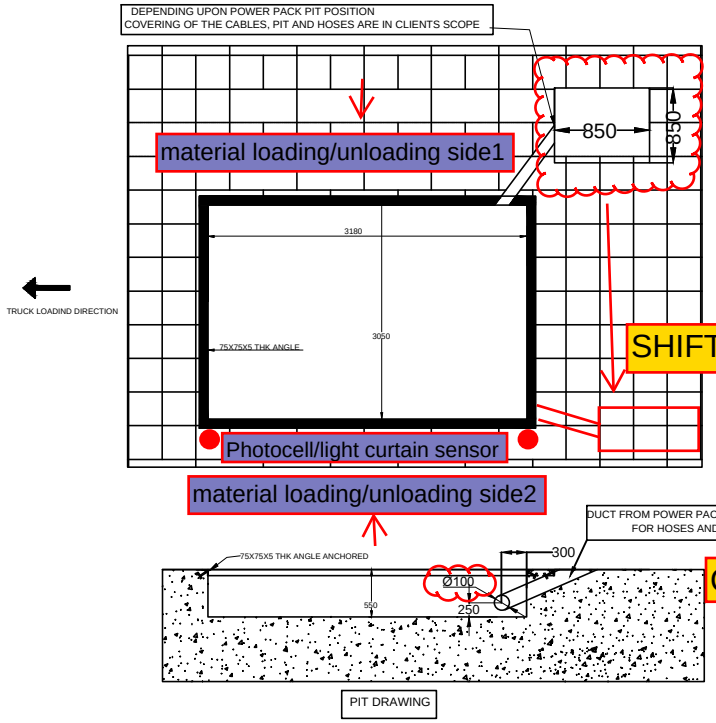


CAN WE USE 4" DUCT?

| SPECIFICATIONS | |
|---|---|
| RATED CAPACITY | 3 TON |
| PLATFORM LENGTH | 3000 mm |
| PLATFORM WIDTH | 3000 mm |
| OVERALL LENGTH | 3150 mm |
| OVERALL WIDTH | 3000 mm |
| LIP | MANUAL , ONE SIDE |
| LIP SIZE | 350 X 2100 |
| SAFETY BELLOW | PROVIDED |
| CLOSE HEIGHT | 550 mm |
| LIFT HEIGHT | 1600 mm |
| POWERPACK MOTOR | 3 PHASE AC, 5 HP |
| PENDANT | 1 NO |
| LIFT & LOWER CUT-OFF | YES |
| STATION ADJUSTABLE SWITCH | YES |

Is it 350mm or 300mm?

NOTE :
1. PIT FOR SCISSOR LIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. REQUIRED ALL CIVIL WORK, CONDUIT & PIT WORK IN CLIENT SCOPE.
4. PROPER DRAINAGE SYSTEM SHOULD BE PROVIDED FOR THE PIT.

| RAL CODE PAINT | RAL 1004 GOLDEN YELLOW | |
|---|---|---|

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE PIT MOUNTED HYDRAULIC SCISOR LIFT

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

| | NAME | SIGN | DATE |
|---|---|---|---|
| DRAWN | S.M.S. | | 18.11.2020 |
| CHECK | S.M.S. | | 18.11.2020 |
| APPRD. | | | |

CLIENT - ACCURATE INDUSTRIAL CONTROLS PVT LTD

PROJECT - ACCURATE INDUSTRIAL CONTROLS PVT LTD

SITE LOCATION - PUNE

If any queries contact : projectsupport@nihva.com

DWG. NO. : NIHVA/20-21/0090 REV- R00

ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: