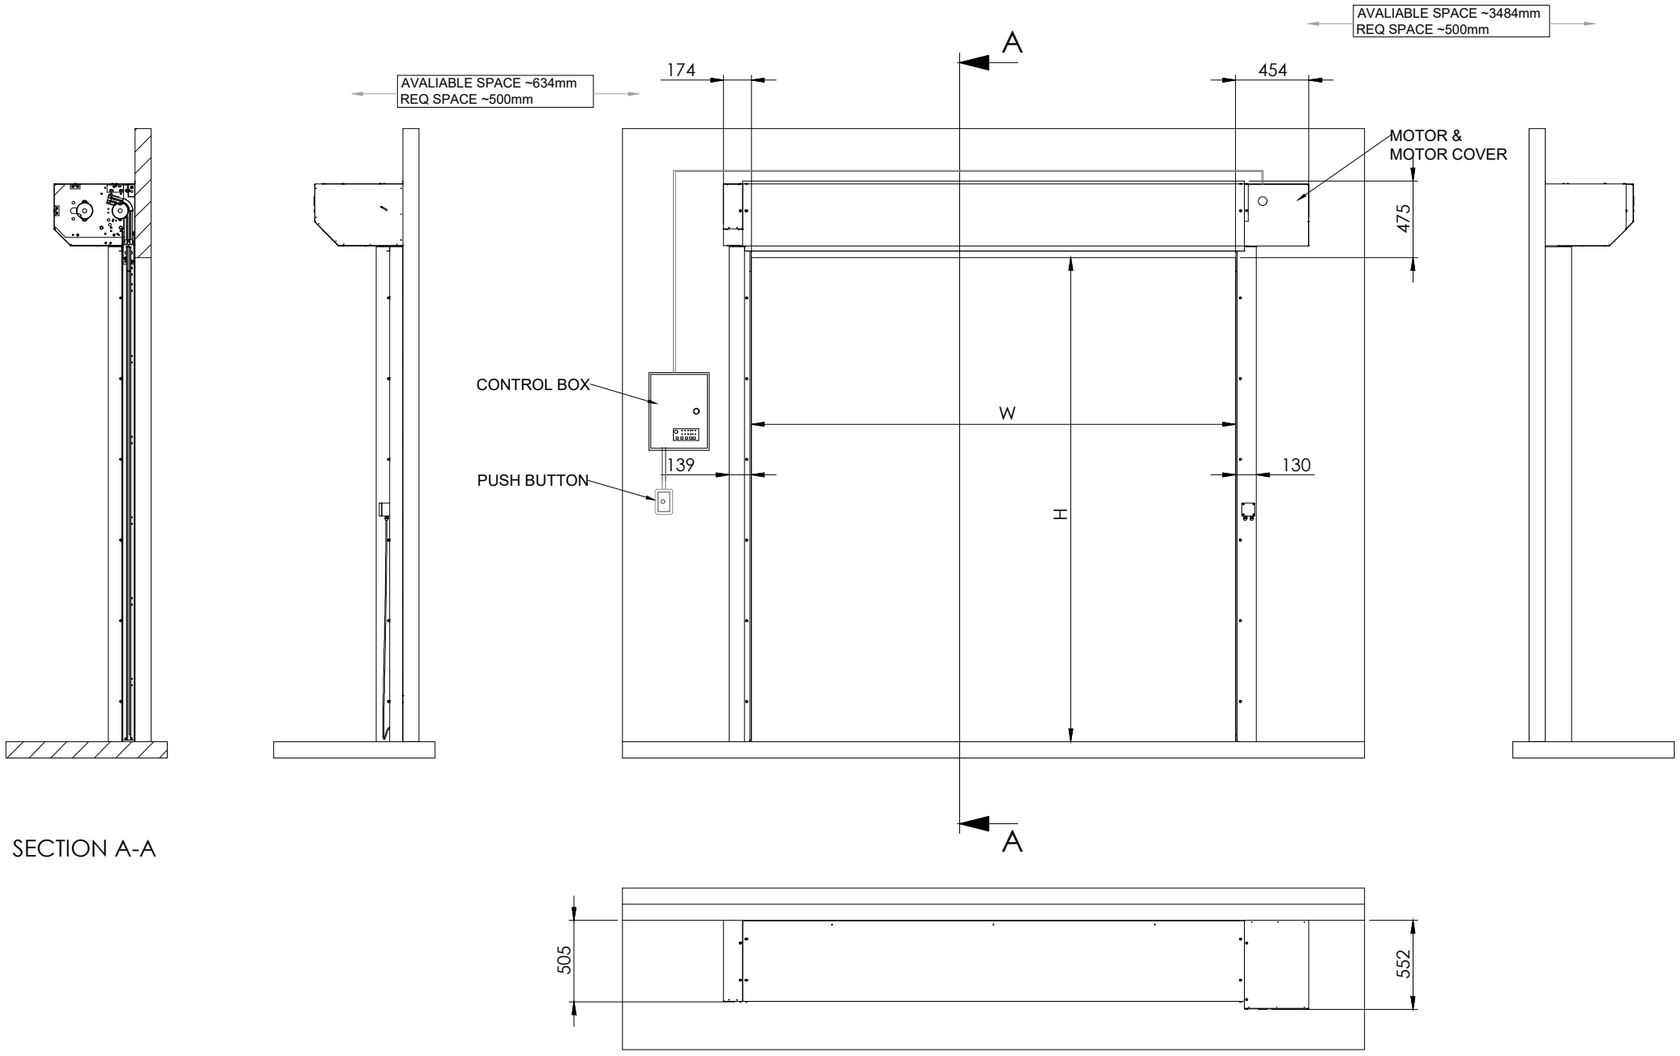


SECTION A-A

HIGH SPEED DOOR - ATEX CERTIFICATE FOR ZONE -1						
				OPENING SIZE		MOTOR LOCATION
	LOCATION	MOUNTING	QTY	W1	H1	
1	PLANT 02 (HSD 06)	INSIDE	01	2700	3500	RHS

TECHNICAL SPECIFICATION :

HIGH SPEED DOOR - ATEX CERTIFICATE FOR ZONE -1

SR.	SPECIFICATIONS	DETAILS
1	STANDARD EUROPEAN NORM AS PER	EN 13241-1
2	TYPE	SELF REPAIRING DYNACO HIGH SPEED DOOR.
3	MODEL	S-549 CAT.2 ATEX POWER CERTIFIED
4	EX	1) II 2 G EX DB EB H IA IIC T4 GB 2) II 2 D EX H IA TB IIIB T135°C DB
5	ZONE AREA	ZONE 1/ 21
6	MATERIAL	STRUCTURE STAINLESS STEEL 304 DOOR CURTAIN PVC ANTISTATIC BLACK COVERS OF THE 2 DOOR POSTS IN STAINLESS STEEL 304 (SMALL) MOTOR COVER IN STAINLESS STEEL 304 (SMALL) DRUM COVER IN STAINLESS STEEL 304 (SMALL) SHAFT + DRUM + BEARING IN STAINLESS STEEL VOLTAGE : SINGLE PHASED 230 V DYNALOGIC 5 PAINTED STEEL 500X500X250 SAFTEY EDGE EARTHING KIT + 5M CABLE
7	ANTISTATIC	ALL NON-METALLIC PARTS WITH A SURFACE LARGER THAN 20CM² ARE REPLACED BY ANTISTATIC OR CONDUCTIVE MATERIALS BOTTOM EDGE DETECTOR AND PHOTOCELLS ARE PROTECTED VIA AN INTRINSICALLY SAFE BARRIER (EX I). INCLUDES COMPLETE DOOR CURTAIN AND PULLEY IN ANTISTATIC MATERIAL
8	MOTOR POSITION	LATERAL, RIGHT HAND SIDE FROM INSIDE
9	OPENING SPEED & CLOSING SPEED	1.0 M/S
10	MOTOR	4 POLES, WITHOUT BRAKE. EXD POWER 1,5 KW-IP RATING: IP66
11	ADDITIONL ACCESSORIES	1) PHOTOCELL - 2 NOS 2) PUSH BUTTON - 2 NOS 3) PULL CHORD SWITCH - 2 NOS 4) RADAR - 2 NOS
12	FABRIC COLOUR	RAL 7038

HIGH SPEED DOOR SIZES :-

SR	WIDTH (W)	HEIGHT (H)	QTY
1	2700	3500	01

NOTE :-
1. All DIMENSIONS ARE IN MM.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE	DOOR AUTOMATION		NIHVA TECHNOLOGY PVT. LTD. PUNE Email:- Sales@nihva.com Website:- www.nihva.com
	SIGN	DATE	
DRAWN	J.P	26/03/26	CLIENT - SIEGWERK INDIA PVT. LTD.
CHECK	B.S	26/03/26	PROJECT - HIGH SPEED DOOR
APPROVAL	V.T	26/03/26	
REV	00		SITE - BHIWADI
If any queries contact : Design@nihva.com			SCALE: - WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			DWG. NO. : NIHVA/25-26/180