

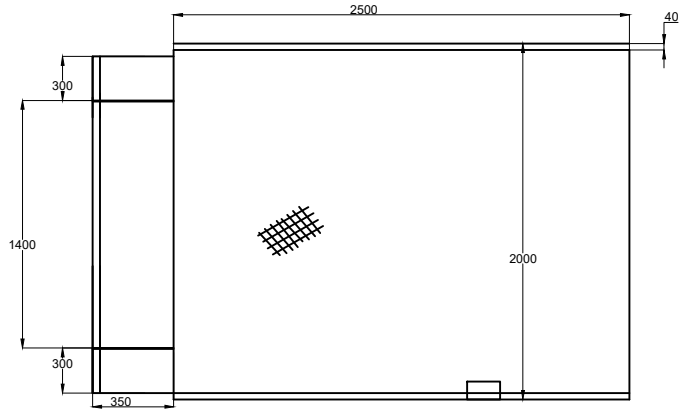


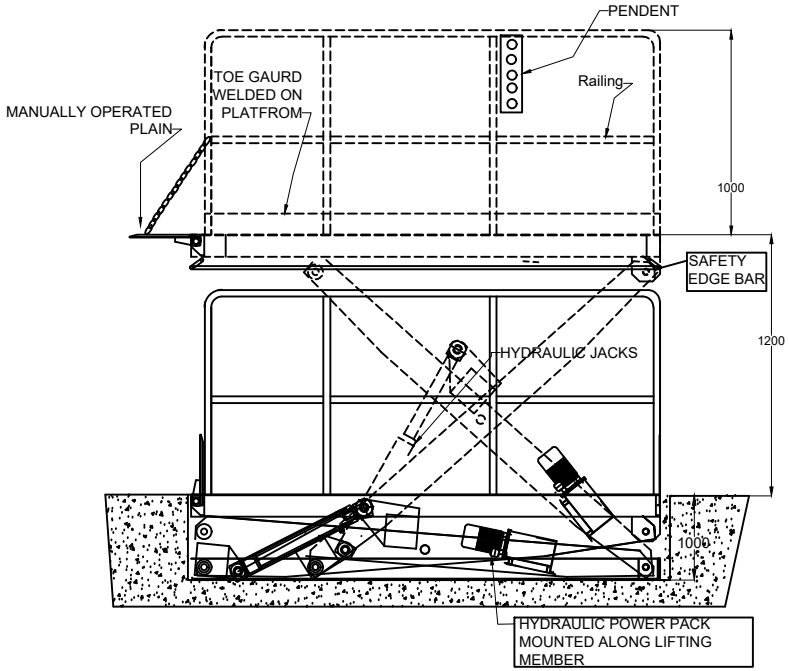

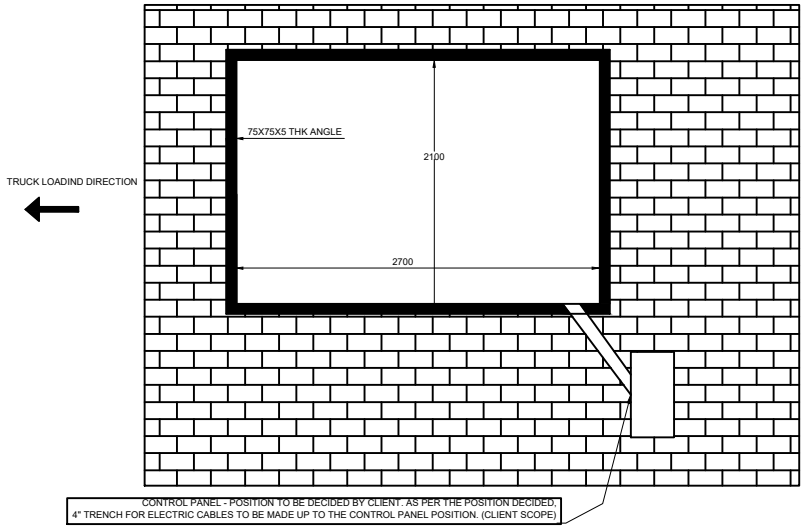

PIT DRAWING

NOTE :
1. PIT FOR SCISSORLIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE
5. WATER DRAINAGE AND PIT CLEANING NEEDS TO BE CONSIDERED AND DONE BY CLIENT
6.PIT & ALL CIVIL WORK IS IN CLIENT SCOPE.

SPECIFICATION:
1. PLATFORM SIZE -2000WX2500L
2. CLOSE HEIGHT/SHUT HEIGHT-1000MM
3. LIFT HEIGHT ABOVE THE FLOOR LEVEL-1200MM
4. CAPACITY-6TON (UDL)
5. FINISH-HOT DEEP GALVANIZING
6.QTY-TOTAL 4NOS OF SCISSOR LIFT (2NOS FOR PHASE 1 & 2NOS FOR PHASE2)
7. HYDRAULIC POWERPACK- 7.5 HP, 3 Phase-NIHVA MAKE
8. LIP- ONE SIDE MANUAL , 3 PIECE SPLIT TYPE(300 + 1400 + 300)
9. SAFETY BELLOW- ALL SIDE
10.CUTOFF LIMIT SWITCH FOR MAXIMUM LIFT
11. MAINTENANCE STOPPER- MANUAL, 2NOS
12.SCISSOR LIFT INTERLOCK PROVIDED WITH SECTIONAL DOOR & DOCK LEVELER
13.ELECTRICAL CABLE FROM CONTROL PANEL TO PIT OPENING : 5 MTR
14. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE
PIT MOUNTED ELECTRO-HYDRAULIC SCISSOR LIFT WITH BELLOW

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	SIGN	DATE
DRAWN	S.B.	20.9.2021
CHECK	G.P.	20.9.2021
APPROVAL	A.K.	20.9.2021
REV.	02	21.9.2021

CLIENT - SHUBHSHREE ENGINEERING
PROJECT - E+H
SITE -
DWG. NO. : NIHVA/21-22/209
If any queries contact : nihvacare@nihva.com
SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm