NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company
GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Client Name Group Captain Chauhan

Date : 24.04.2026
Quote NO : RR 26.27.0018
Kind Attn : Group Captain Chauhan
Email Id : mail2sunilsingh@gmail.com
Contact No: 6380390754

Project Name & Location: Banglore

Subject : Commercial Offer for Automatic Retractable Roof With PC sheet, Pargola,Sliding gate, Wicket gate.


Dear Sir / Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	2
D.	Terms & Condtions	2

A) Commercial Offer

Sr no	Description	Size (mtr)	Qty	Supply & Installation Charges in INR	
			(Nos)	Unit Rate	Total
1	**Automatic Retractable Roof with - Polycarbonate sheet**	• 5181.6 W X 7620 L • One side opening • Total panal 3 (2 movable, 1 fix) • 75% Opening • Installation Inclusive	1	₹ 14,47,000	**₹ 14,47,000**
2	**Automatic Sliding Aluminium Louvers**	• 5400 W X 9100 L	1	₹ 29,30,000	**₹ 29,30,000**
3	**Motorized Single Leaf Sliding Gate**	• 2438 W X 2438 H	1	₹ 3,15,000	**₹ 3,15,000**
4	**Manual Single Leaf Wicket Gate**	• 2438 W X 2438 H	1	₹ 1,55,000	**₹ 1,55,000**
5		**Total**			**₹ 48,47,000**
6		GST Extra @ 18%	18%		**Extra At Actual**
7		P&F Charges @ 3%	3%		**Extra At Actual**
8		Transportation Charges			**In Client Scope**
9		Unloading Charges @ Site			**In Client Scope**
10		Lifting Equipment required @ desired floor			**In Client Scope**
11		Support Structure if required @ site			**In Client Scope**

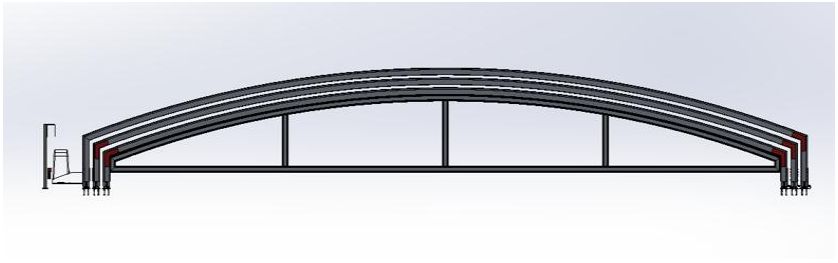

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

TUV INDIA PVT. LTD. ISO 9001

An ISO 9001:2015 Certified Company
GST Pune : 27AAECN0437H1ZM

B) **Technical Specification for Polycorbonate Sheet**

1. Profile : Powder coated AL Frame
2. 3mm solid Polycarbonate sheet
3. Track : Powder coated MS
4. Interlocking
5. Motor Mechanism with control panel **a) Remote operated** **b) Three Phase Motor** **c) Power- As per Roof Dimension** **d) Mechanical Limit Switch** **e) Rack and Pinion Arrangement**
6. EPDM Gaskets and sealants
7. SS Fastners
8. Special NIHVA Make bearing housing



Motorized Single Leaf Sliding Gate

Sr .No.	Specification	Motorized Single Leaf Sliding Gate
1	Door type	Motorised SINGLE Leaf Sliding Gate (One side opening)
2	Mounting Location area	Inside area
3	Design Pattern	Standard Tubular Design Pattern
4	Finish Size	2438 mm x2438 mm (CLEAR OPNING 2438 MM)
5	Outer Tube	80 x 40 x 3 mm MS SQ. TUBE
6	For Post	100 x 50 x 3mm MS SQ. TUBE
7	Innear Tube	40x40x3mm MS SQ. TUBE
8	Gap Between Tubes	Standard Tubular Design Pattern
9	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
11	Guide Rollers supporter during Gate movement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	Painting	QD Paint & QD Primer
13	Emergency Operation	Manual after turn the switch
14	Operating Switch	Push Button from inside
15	Civil work	Client scope – client need to grout the I beam in concrete to create track for sliding gate

Manual Single Leaf Wicket Gate

Sr .No.	Specification	Manual Single Leaf Wicket Gate
1	Door type	**Manual Single Leaf Wicket Gate (2438 mm x 2438mm)**
2	Mounting Location area	**Inside area**
3	Design Pattern	**Standard Tubular Design Pattern**
4	Outer Frame Tube Sizes	**80 x 40 x 3mm. MS SQ. TUBE**
5	Internal Vertical Tube Sizes	**25 x 25 x 3 mm. MS SQ. TUBE**
7	Gap Between Tubes	**100 mm C/C**
8	Painting	**QD Paint & QD Primer**
9	Operation	**Manually Opening**
10	Accessories	**Hinges, Manual Lock**

Aluminium Sliding Louvers

1. Material- Powder coated Aluminium profiles
2. Inbuilt U shape drain water gutters
3. IP67 waterproof motor and remote control system
4. Accessories material in stainless steel 304 and brass H59
5.LED Light
6. Motor Make- France

C) General Conditions

1	Continuous uninterrupted access to installation section or as agreed seperately.
2	Provision of 230 V power supply for hand tools.
3	A dry and secure area, not in direct sunlight is to be provided for storage of product component
4	Access to site between 7 am to 8 pm should be provided.
5	Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6	The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7	Installation will start after receiving of Site Readiness Photographs or written Email communication.
8	We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9	For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for Remobilizing the Team.
10	If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11	After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: **Please find below List which are in Client Scope**

Sr. No		Remark
1	Secured and fully covered Store area to keep the material.	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required.	In Client Scope
5	All structure support required.	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price :	Ex Works Pune.
Delivery :	4 - 6 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.
Payment :	80% Advance along with Confirmed Purchase Order. 10% After material Delivery at site. 10% After Installation.
Validity :	Validity of offer is 15 days from the date of quotation.
Warranty :	12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.
Design Clause :	NIHVA shall be deemed the authors of their respective concept and drawings with reserved rights, including copyrights. It shall not be used by the owner for future additions or alterations to this Project or for another project or should not copied at any other future project or should not transfer or copied by anyone.
Compensation Clause :	Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA a compensation of 25% of order value.

With Best Regards

Pallavi Shirke

7410169333
NIHVA Technologies Pvt Ltd