


DWG.NO: SALT_1729_FDN_01_R0

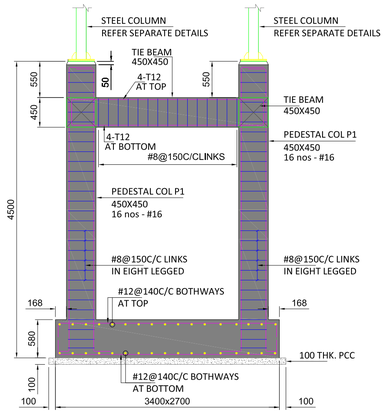


FOOTING & COLUMN REINFORCEMENT DETAIL FC1

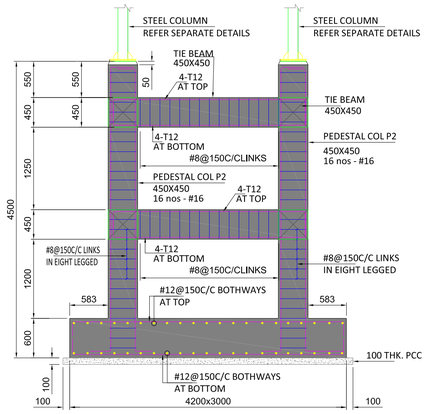

FOOTING & COLUMN REINFORCEMENT DETAIL FC2

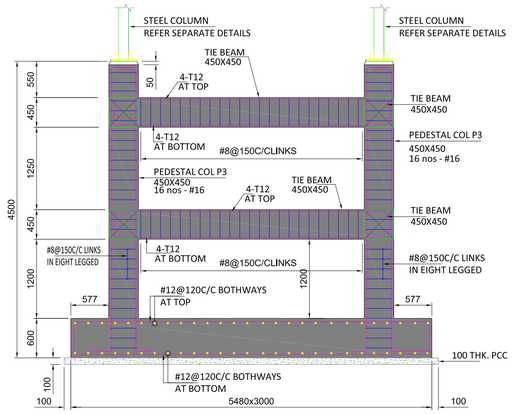

FOOTING & COLUMN REINFORCEMENT DETAIL FC3

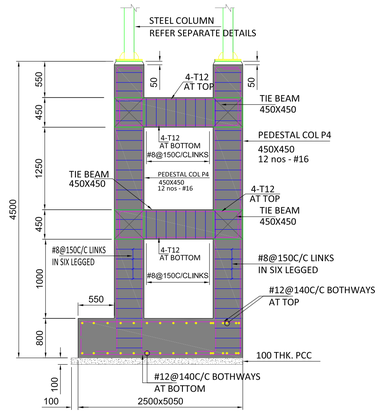


FOOTING & COLUMN REINFORCEMENT DETAIL FC4

SCHEDULE OF COLUMN & FOOTING


		GROUP NO. -FC1	GROUP NO. -FC2	GROUP NO. -FC3	GROUP NO. -FC4
COLUMN / PEDESTAL NO.		P1	P2	P3	P4
PEDESTAL SIZE (b X l)		450 X 450	450 X 450	450 X 450	450 X 450
PEDESTAL STEEL FOOTING TO PLINTH LEVEL.		16 nos - #16	16 nos - #16	16 nos - #16	12 nos - #16
GRADE OF CONCRETE		M25	M25	M25	M25
FOOTING SIZE (L X B)		(2700x3400)	(3000x4200)	(3000x5480)	(2500x5050)
DEPTH	D	580	600	600	800
	d				
BOTTOM STEEL (B/W)		#12 @ 140C/C	#12 @ 150C/C	#12 @ 120C/C	#12 @ 140C/C
TOP STEEL (B/W)		#12 @ 140C/C	#12 @ 150C/C	#12 @ 120C/C	#12 @ 120C/C
GRADE OF CONCRETE		M25	M25	M25	M25

FOUNDATION TO PLINTH LEVEL




REINFORCEMENT DETAIL
FOR PEDESTAL P1, P2 & P3- 450X450


FOUNDATION TO PLINTH LEVEL




REINFORCEMENT DETAIL
FOR PEDESTAL P4- 450X450

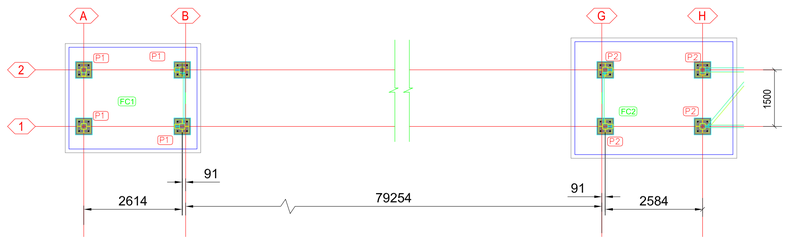

LAYOUT FOR FOUNDATION LEVEL (Hanger 1)

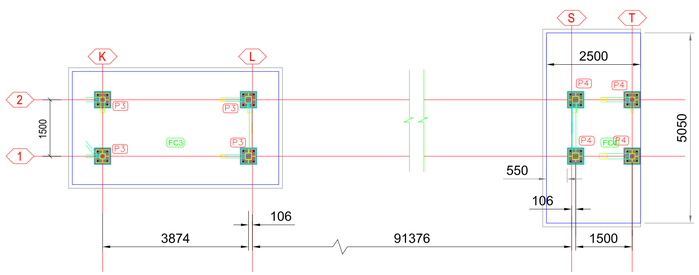

LAYOUT FOR FOUNDATION LEVEL (Hanger 2)

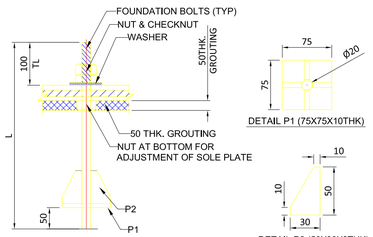

TYPICAL DETAILS OF L-TYPE BOLTS (EMBEDED)

'L' BOLT DETAILS FOR STRUCTURAL COLUMN

Ø	TL(MM)	L(MM)	COLUMN	TOTAL BOLTS
Ø16 (8.8 GRADE)	100	800	FOR ALL COLUMN	64
			TOTAL	64

REV.NO.	DESCRIPTION.	REV.DATE	DRAWN.	CHKD.	APPD.
0	ISSUED FOR APPROVAL	05.11.22	IMS	HAB	HAB

DWG.TITLE :- FOUNDATION DRAWING FOR DOOR FRAME TRUSS BETWEEN 84M & 99M

PROJECT: MEGADOOR INSTALLATION AT HYDRABAD AIRPORT

CLIENT: GMR

SALT DESIGN SERVICES — NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

DRAWN :RRK	CHECKED : HAB	SCALE: 1:100
APPROVED : HAB	JOB CODE. : 1729	DATE: 05.11.2022

DWG.NO: SALT_1729_FDN_01_R0 (SH-1OF1) REV. - R0 SIZE. - A1

A1 [841 x 594]