

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2200	3000	550	400	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2240	3000	560	

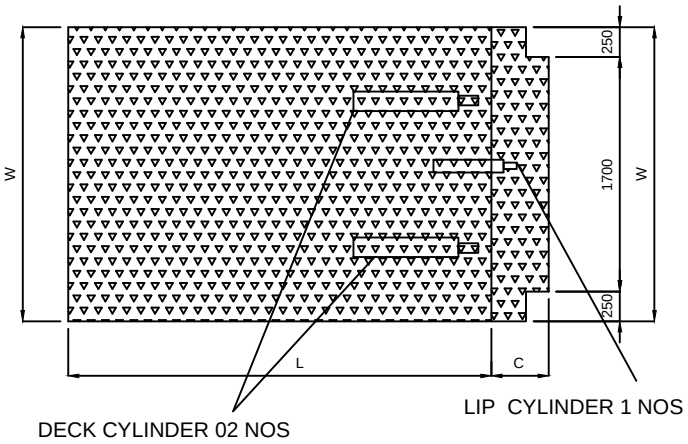



DECK CYLINDER 02 NOS


LIP CYLINDER 1 NOS

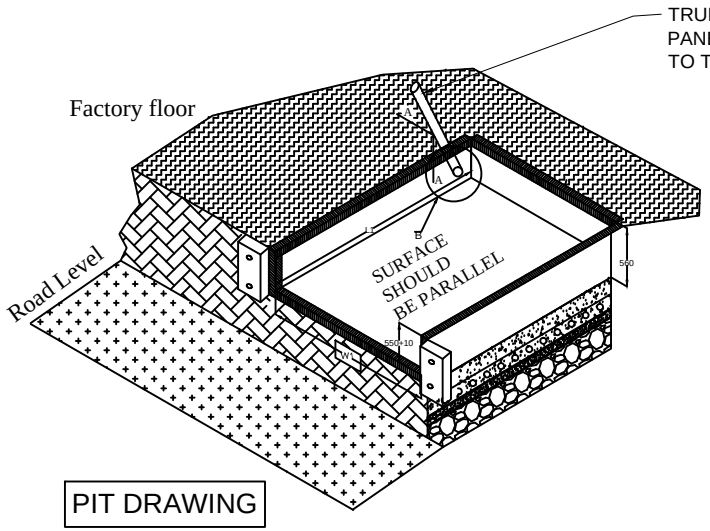

PIT DRAWING

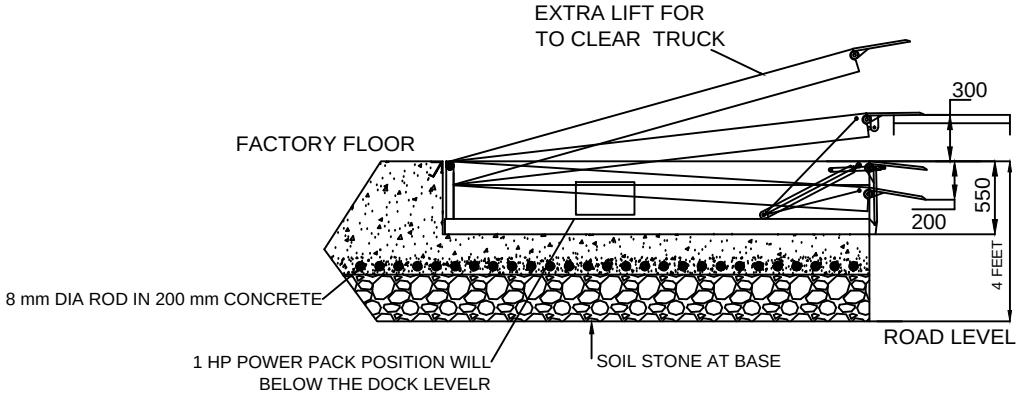



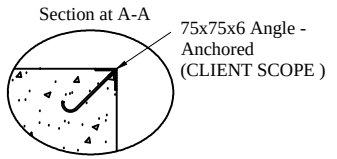

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGS FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 09 TON CAPACITY - 01 NO

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.

2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER - 09 TON

	NAME	SIGN	DATE
DRAWN	P.V.A		18.06.2019
CHECK	V.M.T		18.06.2019
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - RMK INFRA STRUCTURE PVT LTD

PROJECT -

SITE LOCATION - TALEGAON

DWG. NO. : NIHVA/19-20/0033 | REV- 00

SCALE: NTS | WT: | SHEET: 01 OF 01