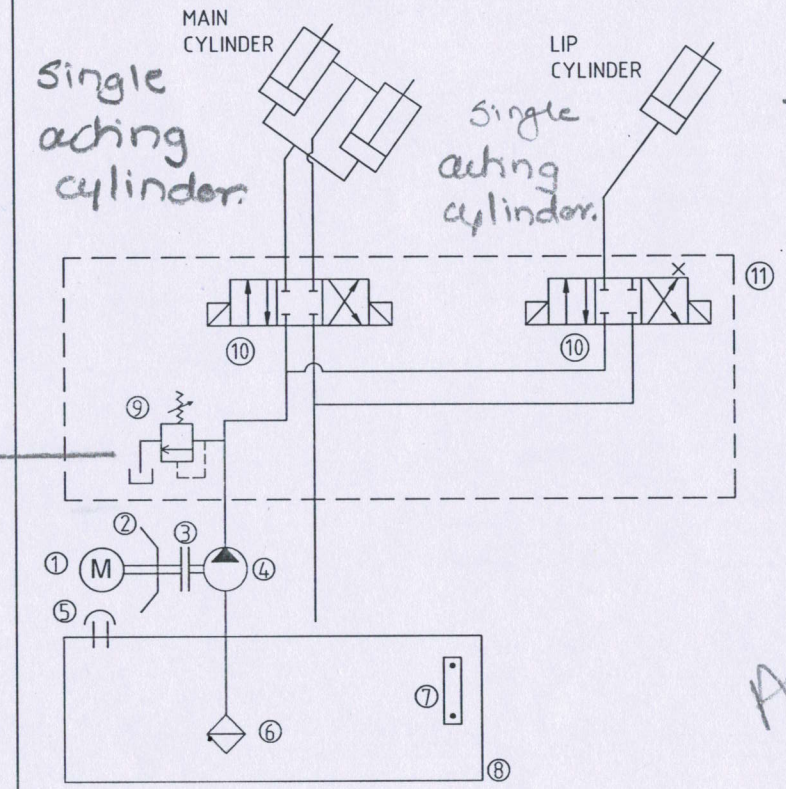



Need DPRS (Set Screw type PRV)

| | | | |
|---|---|---|---|
| 11 | MANIFOLD BLOCK | CREATIVE | 1 |
| 10 | DIRECTION CONTROL VALVE DSG 013 C2 D24 | YUKEN | 1 |
| 9 | PRESSURE RELIEF VALVE DPRH 06 OR DPRS 06 * | POLYHYDRON | 1 |
| 8 | OIL RESERVIOR 10 LTRS | CREATIVE | 1 |
| 7 | OI LEVEL GUAGE LG 3 | HYDROLINE | 1 |
| 6 | SUCTION STRAINER SC3 002 | HYDROLINE | 1 |
| 5 | FILTER BREATHER FSB 05 | HYDROLINE | 1 |
| 4 | GEAR PUMP 2.5 LPM (3006) | DOWTY | 1 |
| 3 | GEAR COUPLING | JACKTECH | 1 |
| 2 | 1 HP BELL HOUSING | JACKTECH | 1 |
| 1 | ELECTRIC MOTOR 1 HP, FOOT , FLAME PROOF | CROMPTON | 1 |
| NO. | DESCRIPTION | MAKE | QTY. |

**BILL OF MATERIAL**

Approved.
07/01/2019

| REV | DATE | DESCRIPTION | REMARK |
|---|---|---|---|

MEDIUM CLASS OF DEVIATION FOR DIMENSIONS WITHOUT SPECIFIED TOLERANCE AS PER IS:2102

| | | | | | |
|---|---|---|---|---|---|
| CREATIVE POWER &CONTROL | SCALE NTS | DRAWN | CLIENT NIHVA TECHNOLOGIES PUNE | TITLE– HC DRG. FOR DOCK LEVELER POWER PACK | |
| CHINCHWAD PUNE | ALL DIMENSIONS ARE IN MM | CHECKED | SHEET 2 OF 2 | DRAWING NO. FP-HC-1-2-19 | REV-00 |
| | DATE -05-01-2019 | APPROVED | | | |