NIHVA TECHNOLOGIES PVT.LTD.



“We Make Possible”

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT.LTD.

Customer Name : Mars International

Proposal Details: Techno Commercial Proposal for 10.8 mtr Telescopic Conveyor

Proposal No : SQT.19.20.2298R

Proposal Date : 05 Aug 2020

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Cover Letter

Kind Attention **: Mr. Ravi Sankar**

Greetings from **M/s. NIHVA Technologies Pvt. Ltd.**

We are very much Thankful to you for sharing your valuable enquiry with us.

With reference to the same we had gone through the details shared by you and we hereby propose the best Techno-Commercial Offer as enclosed.

We hope the enclosed offer is in line with your requirement.

Awaiting your valuable feedback regarding the same. We admire for the excellent & Healthy Long term Relations with you & your esteemed Organization!!

With regards,

Varsha

8551091333

NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

TELESCOPIC CONVEYOR-RFQ



RFQ Specifications :

✓Bag Size: 600*300*400mm,

✓ Conveyor Speed: 8 mtr/min (30mtr/min)

✓ Boom Drive Speed :10-15 mtr

✓ Capacity:167kg/mtr (1803 kg in total load)

✓ Belt Width : 600 mm

✓ Parking Space: 4.8 mtr

✓ Extension : 6 mtr

✓ Total : 10.8 mtr

NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

Particular	Specification
Material to be handle	Boxes/sacks
Weight of Box / bags	50 Kg Maximum
Size of Box / Bag	600 (L) x 300 (W) x 400 (H) (Overall)
Temperature	Ambient
Capacity	750 Boxes/Hour continue Operation
Type	Collapsible Boom Type Hinged Telescopic Belt Conveyor
Size of Belt	600 mm width
Type of Belt	Smooth top 2 Ply , PVC Coated Endless type (Food Grade)
Length of Conveyor	Fixed Length - 4800 mm Telescopic (Expanded) - 6000 mm Total - 10800 mm
Main Body of Conveyor	Manufacturing From 6 mm Thick IS 226 Plate Material (as per new advance design)
Height Adjustment	With 2 HP Power Pack and Cylinder for Height Adjustment (Rexroth parts) (ABB Motor)
Panel (PLC) With HMI	The Conveyor comes with a fixed main panel on rear side and front side only Operating Panel with emergency stopper sensor Bar , LED Lighting , Totally consoled wiring
Painting	Powder Coated


NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

TELESCOPIC CONVEYOR


NIHVA SCOPE:-


- ✓ Design, Manufacturing, Assembly
- ✓ Electronics (AB PLC, Push Button Panel, Etc.)
- ✓ Base Structure
- ✓ UPS for 20 min backup
- ✓ Rollers & Mechanical Stopper
- ✓ Bearings & Tower Lamp
- ✓ Sprockets & Chains
- ✓ Photo Sensor
- ✓ Belts
- ✓ Head Pulley Guard
- ✓ Motor & Drive Packs
- ✓ Chain Guard
- ✓ Anchoring Unit
- ✓ Hardware
- ✓ Part Trails & Proofing

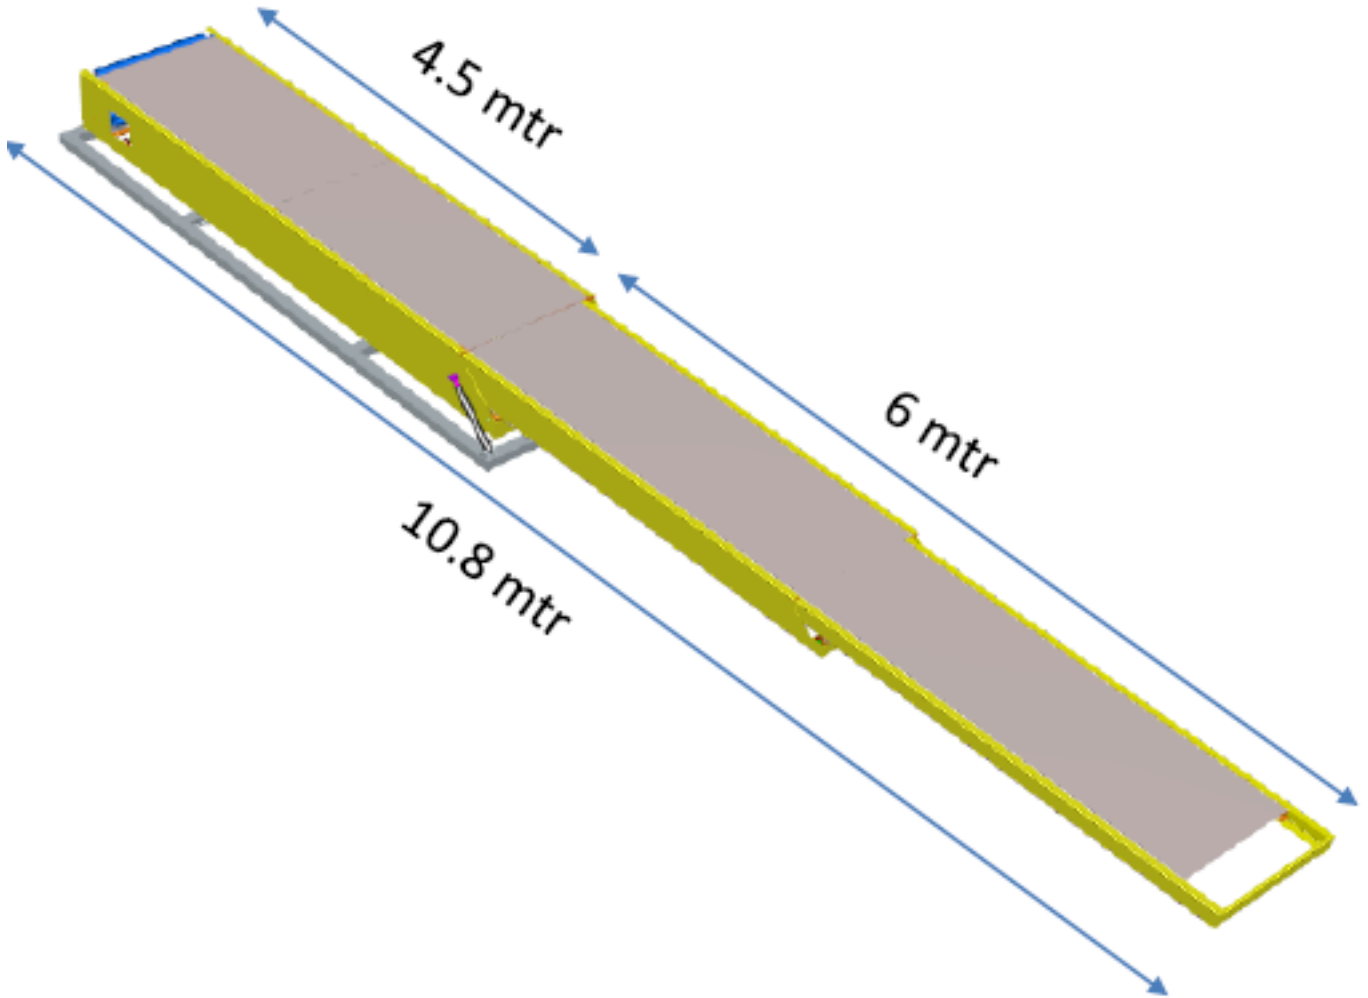

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

MS Boom Structure

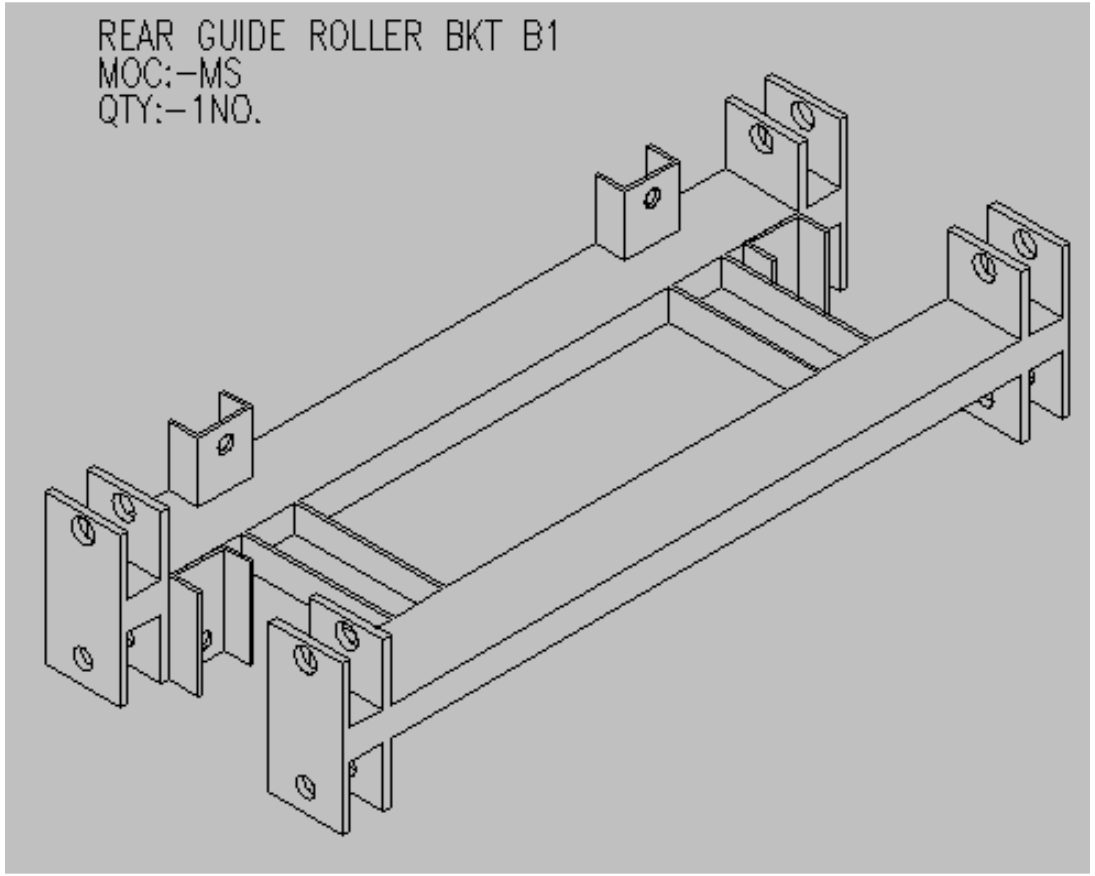

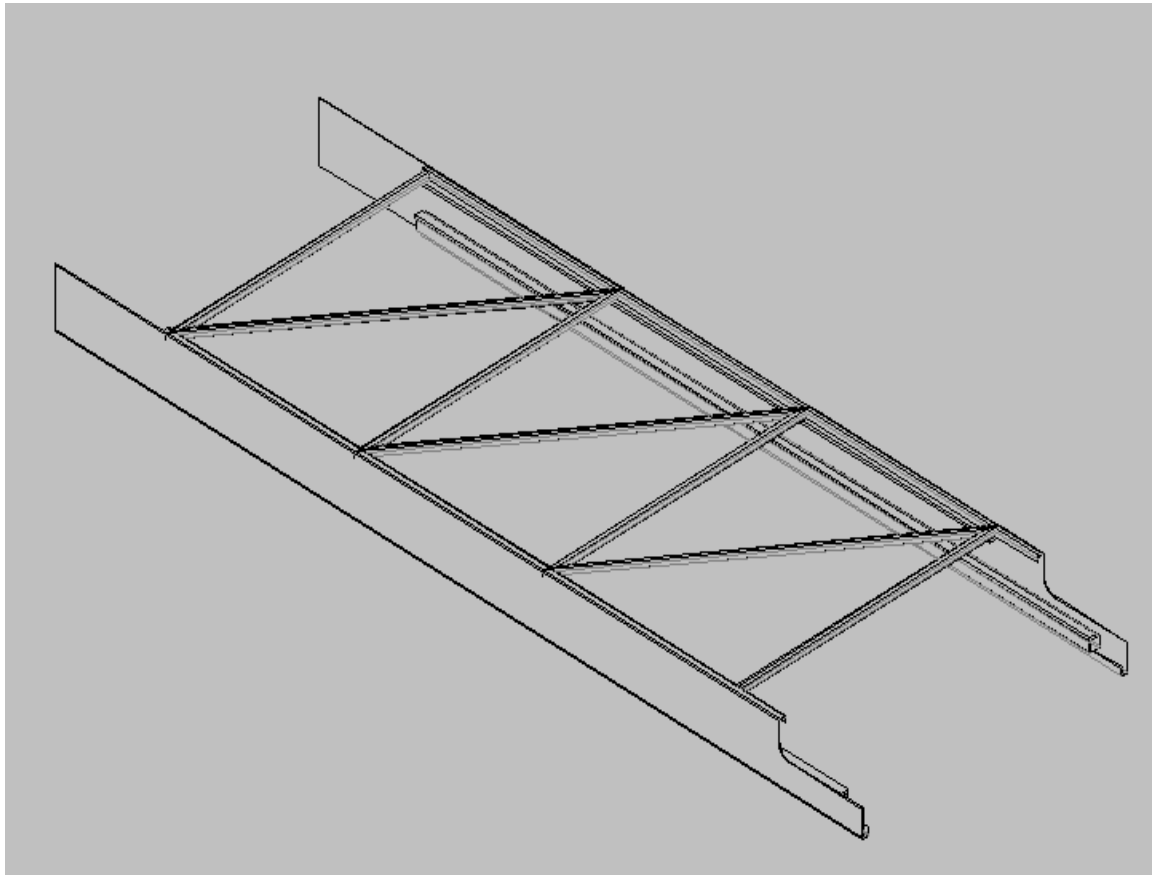

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Conveyor Main Drive

Gear motor Specifications:-

- ✓ Motor Power :-2.6 Kw or above
- ✓ Motor Shaft Speed: 1440 rpm
- ✓ Torque :-1708 Nm or above
- ✓ Gear Ratio : 30
- ✓ Motor Poles :-4
- ✓ 3 phase motor 415 volt 50 Hz
- ✓ Type: Helical worm
- ✓ Make: SEW (Customer Specified)

Note: above Selection may vary during final design process.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Conveyor Boom Drive

Gear motor Specifications:-

- ✓ Motor Power :-0.56 Kw or above
- ✓ Motor Shaft Speed: 1440 rpm
- ✓ Torque :-871 Nm or above
- ✓ Gear Ratio : 63
- ✓ Motor Poles :-4
- ✓ 3 phase motor 415 volt 50 Hz
- ✓ Type: Helical worm
- ✓ Make: SEW (Customer Specified)

Note: above Selection may vary during final design process.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Customer Scope of Supply

- ✓ Process Plan, process flow charts, WI and other documents related to Production.
- ✓ Participation/DAP Approval for Designed equipment's before start of manufacturing
- ✓ 2D/ 3D Drawings of components.
- ✓ Trial Components, to and from transportation, testing equipment’s .
- ✓ Unloading, Unpacking and Site placement
- ✓ Handling Equipment's for installation site.
- ✓ Electrical connection at necessary location
- ✓ Provision of primary air connection at all locations [If required]
- ✓ Site for installation (Civil work if any after submission of drawing by maker)
- ✓ Structural requirement and support (if any) will be made available by you at your cost.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Commercial Offer

Sr No.	Item Descriptions	Qty.	Rate	Amount
1	Telescopic Conveyor 10.8 meter(With Angle adjustment unit & HMI Unit) (Supply)	1	2,550,000	2,550,000
2	Installation of Conveyor	1	45,000	45,000

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Terms & Conditions

General Prerequisites Required at Site.

- ✓ Finished Flooring after curing (Without Water)
- ✓ Electrical Supply on the site single phase/three phase points at different places.
- ✓ Provide electrical cables near to the installation machinery
- ✓ Fork lift/crane to be provided if required .
- ✓ Scaffolding require for Installation it is in client scope.

Limit of Supply

- ✓ Provide place to store the material to be installed .
- ✓ Be responsible for the safe custody of all material.
- ✓ Provide place to safely store all the tools of installation.
- ✓ Provide change & rest room for the workers.

Quote/Supply is based on

- ✓ BOM is calculated as per standard quantity measurement.
- ✓ In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage will be to customer account.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Terms & Conditions

The supply included only those mentioned in the quote & does not include.

- ✓ Unloading from truck placement on site.
- ✓ Electrical connection for control panel.

Client Scope

- ✓ Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope.
- ✓ Any civil / masonry/structural work required to support are in client scope.
- ✓ All structure support is in client scope.
- ✓ NIHVA Will provided structure drawing only if required.
- ✓ Exiting/Repair/ Modification/ Refurbishment charges will be extra.
- ✓ Finished Flooring after curing (Without Water).
- ✓ Electrical Supply on the site single phase/three phase points at different places.
- ✓ Provide electrical cables near to the installation machinery
- ✓ Fork lift/crane to be provided if required .
- ✓ Scaffolding require for Installation is in client scope.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Payment Terms

Prices

✓ Ex Works Pune.

Payment Terms

✓ 80% Advance along with Confirmed Purchase Order and Balance before Dispatch.

Warranty

✓ 12 months

Delivery

✓ 10-11 weeks from the receipt of advance.

Validity

✓ 30 days from the date of this commercial offer.

NIHVA

NIHVA TECHNOLOGIES PVT. LTD.

Thank You

International Business Partners

ALBANY ASSA ABLOY

MEGADOOR ASSA ABLOY

Crawford ASSA ABLOY

besam ASSA ABLOY

ACO

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.