

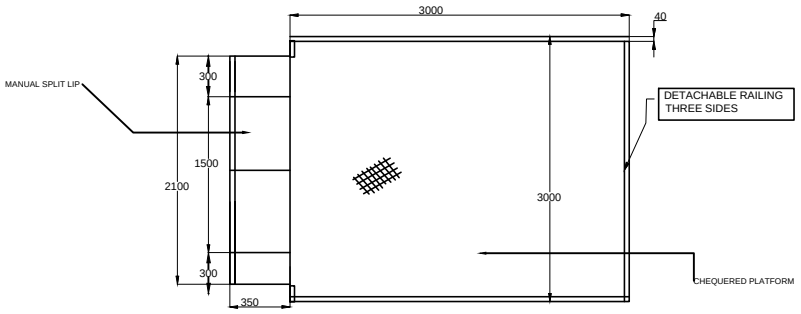


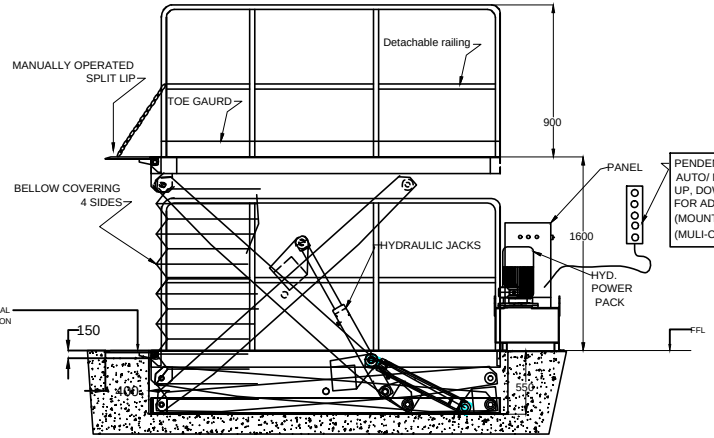

PENDENT WITH 10 M CABLE
AUTO/ MANUAL SWITCH
UP, DOWN, POSITION SELECTION
FOR ADJUSTABLE SWITCH.
(MOUNTING NIHVA SCOPE)
(MULI-CORE FLEXIBLE CABLE WITH WIRE ROPE)

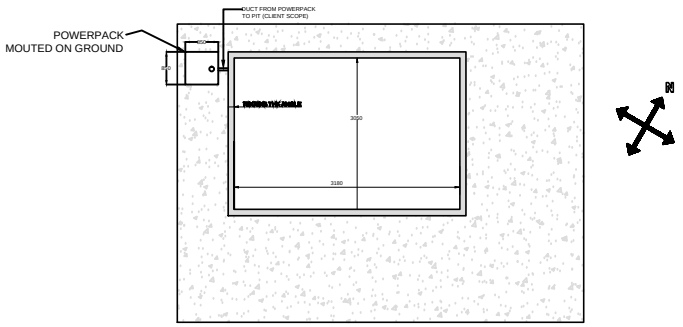

PIT DRAWING

AS PER SITE VISIT , IT IS FOUND THAT SCISSOR LIFT INSTALLATION COME IN TRAVEL PATH . CLIENT MUST ENSURE THAT LOAD MOVING ON SCISSOR LIFT PLATFORM SHALL NOT BE GREATER THAN CAPACITY OF SCISSOR LIFT & FREQUENCY OF LOAD MOVING ON PLATFORM SHOULD NOT BE HIGH.

SPECIFICATIONS	
RATED CAPACITY	3 TON
PLATFORM LENGTH	3000 mm
PLATFORM WIDTH	3000 mm
OVERALL LENGTH	3150 mm
OVERALL WIDTH	3000 mm
LIP	MANUAL , ONE SIDE
LIP SIZE	350 X 2100
SAFETY BELLOW	PROVIDED
CLOSE HEIGHT	550 mm
LIFT HEIGHT	1600 mm
POWERPACK MOTOR	3 PHASE AC, 5 HP
PENDANT	1 NO
LIFT & LOWER CUT-OFF	YES
STATION ADJUSTABLE SWITCH	YES

DETAILS-
(1) PENDANT WILL BE PROVIDED & HANGING PROVISION IN NIHVA SCOPE.
(2) PENDANT WILL HAVE AUTO/MANUAL SWITCH , UP/ DOWN SWITCH , POSITION SELECTION PUSH BUTTONS & EMERGENCY BUTTON.
(3) ONE PAIR OF PHOTOCELL WILL BE PROVIDED & MOUNTING IS IN NIHVA SCOPE .
(4) DETACHABLE RAILING FLUSH WITH FACTORY FLOOR WILL BE PROVIDED .
(5) SCISSOR LIFT WILL BE HAVING POSITION 0 , POSITION 1 & POSITION 2 .
(6) LIMIT SWITCH WITH PROPER MOUNTING WILL BE PROVIDED AT OUTSIDE BELLOW FOR POSITION 2 ALIGNMENT AS PER VEHICLE HEIGHT.

RAL CODE PAINT (NIHVA STANDARD) , KINDLY INFORM IF OTHER. | RAL 1004 GOLDEN YELLOW

NOTE :
1. PIT FOR SCISSOR LIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK & IS IN CLIENT SCOPE.
4. COVERING REQUIRED FOR HOSES, PANEL , AND CABLES RELATED CIVIL WORK IS IN CLIENTS SCOPE ALSO PROPER DRAINAGE SYSTEM SHOULD BE PROVIDED FOR THE PIT.
5. PIT, DUCTS & ALL REQUIRED CIVIL WORK IN CLIENT SCOPE.
6. LEVEL OF PIT SHOULD BE PLAIN & MUST TAKE ATLEAST LOAD OF 6000KG.
7. ELECTRICAL DRAWING WILL BE SENT FOR REVIEW & APPROVED BEFORE MANUFACTURING OF CONTROL PANEL .

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE PIT MOUNTED HYDRAULIC SCISOR LIFT GA

	NAME	SIGN	DATE
DRAWN	SIDDHESHWAR		8.12.2020
CHECK			
APPRD.			

If any queries contact : projectsupport@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -
DWG. NO. : NIHVA/20-21/VDR/0084 | REV- R00
SCALE: NTS | WT: | SHEET: