DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPERS SIZE (OPTIONAL)
	2000	3000	550	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	3050	560	

CAPACITY - 06 TON OR 09 TON (QTY - 31 NOS)


NOTE : INTERNAL DESIGN WILL BE CHANGE AS PER CAPACITY FINALIZED.


CONTROLS : 2 PUSH BUTTONS FOR DECK UP & DOWN.
2 PUSH BUTTON FOR LIP UP & DOWN.

TRUNCH FOR SUPPLY CABLE 4" DIA FROM PANEL POSITION (CUSTOMER TO DECIDE) TO THE BOTTOM OF PIT

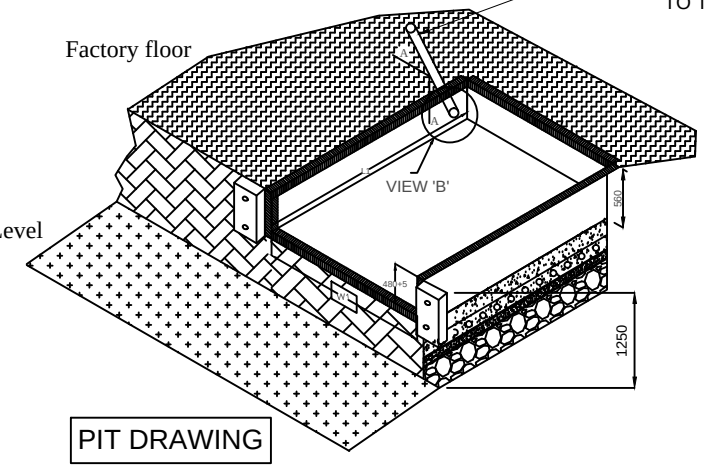


PIT DRAWING

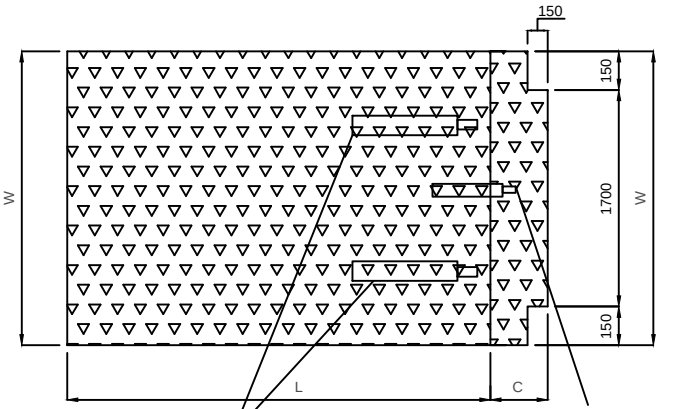


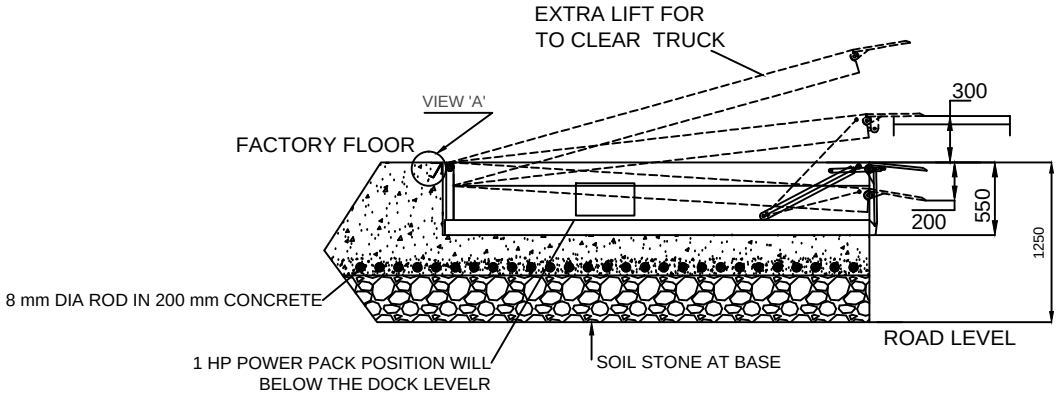

VIEW B



VIEW A



DOCK LEVELER-

IMP NOTE: -

1.CAPACITY : 06 TON OR 09 TON (QTY : 31 NOS).
2.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.
4.PROPER DRAINAGE SHOULD BE DONE.
5.TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM).
6.LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING.
7.MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED).
8.FABRICATION TOLERANCE WILL BE +/- 10 MM.
9.ALL CIVIL WORK WILL BE IN CLIENT SCOPE.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER				NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD. Website:- www.nihva.com Tel : 020 66304033 Email:- info@nihva.com
DRAWN	P.A		04.02.19	CLIENT - ESR, PUNE
CHECK	V.T		04.02.19	PROJECT - BMW
APPRD.				SITE LOCATION - ULUBERIA
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/18-19/0268 REV- 00
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01