AMNS/PUNE/720-SCB/1021-02/263473 ANNEXURE II

SUPPLY AND FIXING OF CANOPY AT ARCELORMITTAL NIPPON STEEL INDIA LTD PUNE.

The following is the BOQ. In respect of terms & conditions, not explicitly provided in this Special Terms & Conditions, provisions of General Conditions of contract are applicable.

Bidders are required to go through the tender document carefully before giving final quote for items mentioned in the attached list. If required, bidders can also visit our site for understanding the job properly however; they should inform their program for site visit in advance to the contact persons (preferable technical contact 1).

QUOTATION FORMAT

S No	Description	Qty	Unit	Unit Rate (`)
1	**SUPPLY AND FIXING OF CANOPY** **(W-6mtr, L-32mtr, H-4.4mtr) AT ARCELORMITTAL NIPPON STEEL INDIA LTD PUNE.**	4	NOS	

Scope of work .

Contractors Scope of Work:

1. Dismantling of existing canopy at CR lines & keep separate as per AMNS instruction.
2. Providing canopy for 4 CR & HR lines only [W- 6mtr L- 32mtr H-4.4mtr].
3. Suppling and fixing of canopy as per the machine dimension, drawing should be made and get approved by AMNS.
4. Providing pillar every 5 mtr in canopy at lines[4mmx72mmx72mm] with firm base plate and grouting arrangements.
5. Providing the removable/Sliding provision of top structure [Square tube structure].
6. Lighting arrangement should be separate & adjustable on top side.
7. Providing water proofing provision in all canopy at lines to avoid any water seepage from top.
8. Providing poly carbonate sheet [5mm Thick] for canopy roof materials & easy to clean setup.
9. Providing canopy height and width as per max height / width of line equipment's.
10. Providing square pipe structure for roof sheeting arrangement.
11. All nut bolt washer must be rust preventive type.
12. Supply and fixing work of canopy at site along with epoxy and enamel painting as per AMNS request.
13. Providing all Personal Protective Equipment for the workers as per the requirement of the site. Work will be stopped in case the proper protection equipment is not found with the workers.

14. Arranging the proper housekeeping after daily work completion & not leave the work site in an unsafe condition or any other condition that might cause injury to personnel, damage to existing work, plants or equipment.

REFER THE BELOW DETAIL LINE WISE.

SR. NO	LINE NAME	WIDTH	LENGTH	SQ. M	SQ. FT
1	CR SLITTER	4.63	31.5	146	1569
2	CR WCTL	4.8	45	216	2324
3	CR NCTL	3.89	29.3	114	1226
4	TRAP	5.63	45	253	2726

Fig - 1

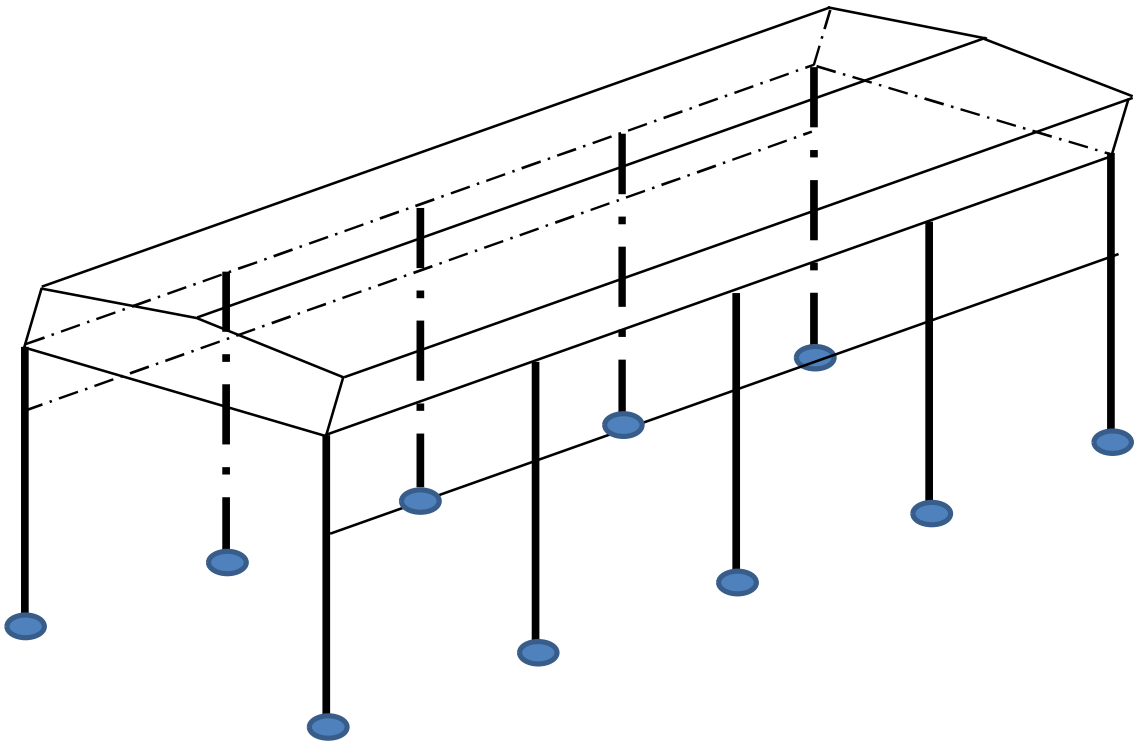


Fig - 2

LINE DIAGRAM

