**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

## NIHVA Sales Quotation

**Lupin Limited**
**Pune**

**Date :** 22.12.2020
**Quote NO :** SQT.20.21.2809R5
**Kind Attn :** Aashish Hande
**Email Id :** aashishhande@lupin.com
**Contact No:** 9930792276

**Subject : Revised Quotation for Honeycomb Grill Motorized Single Skin Rolling Shutter.**

Dear Sir,

**Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.**
**This has reference to your above mentioned requirement, please find below our Solutions.**

| Sr. No | Description | Pages |
|---|---|---|
| A. | Commercial Offer | 1 |
| B. | Technical Specification | 2 |
| C. | General Conditions | 3 |
| D. | Terms & Condtions | 3 |

**A) Commercial Offer**

| Sr No | Description | Size | | Qty | Supply Charges in INR | | Installation Charges in INR | |
|---|---|---|---|---|---|---|---|---|
| | | Clear Width (mm) | Clear Height (mm) | (Nos) | Unit Price | Total Amount | Unit Price | Total Amount |
| 1 | **Motorized Single Skin Rolling Shutter - Honeycomb Grill** | 2500 | 3000 | 2 | 94,000 | 188,000 | 12,500 | 25,000 |
| 2 | **Motorized Single Skin Rolling Shutter - Honeycomb Grill** | 3950 | 3200 | 2 | 116,000 | 232,000 | 12,500 | 25,000 |
| 3 | **Motorized Single Skin Rolling Shutter - Honeycomb Grill** | 4650 | 4000 | 1 | 142,000 | 142,000 | 12,500 | 12,500 |
| 4 | **Motorized Single Skin Rolling Shutter - Honeycomb Grill** | 5300 | 4000 | 1 | 155,000 | 155,000 | 12,500 | 12,500 |
| | **Total** | | | **6** | | **717,000** | | **75,000** |
| 5 | P&F Charges | | | 0% | | - | | |
| | **Total Without Taxes** | | | | | **717,000** | | **75,000** |
| | GST Extra @ 18% | | | 18% | | 129,060 | | 13,500 |
| | **Total With Taxes** | | | | | **846,060** | | **88,500** |
| 6 | Transportation Charges | | | | | Inclusive | | |
| 7 | Unloading Charges @ Site | | | | | In Client Scope | | |


**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**B) Technical Specification**

**Motorized Rolling Shutter with Honeycomb Grill**

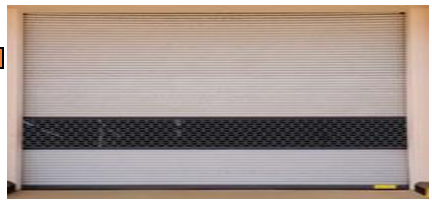

| Sr .No. | Specification | GI Motorized Rolling Shutter with Honeycomb Grill |
|---|---|---|
| 1 | **Description:** | Motorised Rolling Shutter with GI Slats with thickness of 1 mm. |
| 2 | **Mounting Location area** | Inside area / Outside area |
| 3 | **Mounting Surface** | Side Brackets: Optional = On Concrete /Steel & Side |
| 4 | **Curtain Panel** | The panel made of 1.0mm thick GI. |
| 5 | **Curtain panel size** | 75mm wide |
| 6 | **Curtain Profile** | Curved with 1000mm Honeycomb Grill to be installed at eyelevel height |
| 7 | **Bottom Profile** | M. S. Plate 100 mm x 2.5 mm thick with angle stiffener |
| 8 | **Side Guide Profile** | M.S." U" Shaped profile. |
| 9 | **Roller Shaft** | M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h |
| 10 | **Side Brackets** | MS Plate 3 mm to 10 mm thick, as per the opening dimension. |
| 11 | **Hood Cover** | Made of GI Sheet Thickness 0.9 mm GF mm |
| 12 | **Surface finish** | Powder coated - Finish with two coats of Polyurethane spray paint similar to RAL9006 over one coat of Epoxy Primer. |
| 13 | **Drive Unit & Mounting Type** | Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection |
| 14 | **Control Panel** | Three Station Push Button with Deadman Control |
| 15 | **Safety** | Safety Catch |

**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**C) General Conditions**

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

**Note: Please find below List which are in Client Scope**

| Sr. No | Description | Remark |
|---|---|---|
| 1 | Secured and fully covered Store area to keep the material | In Client Scope |
| 2 | Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site | In Client Scope |
| 3 | Electrical Supply on the site single phase/three phase points at different places. | In Client Scope |
| 4 | Any civil / masonry/structural work required | In Client Scope |
| 5 | All structure support required | In Client Scope |
| 6 | In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage. | In Client Scope |
| 7 | Conduits, Cables required | In Client Scope |

**D) Terms & Conditions**

**Price** : Extra at Actual

**Delivery** : 3-4 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

**Payment** : 30% advance / 60% against Proforma(Cheque will be released against final invoice) / 10% after installation and commissioning.

**Validity** : Validity of Offer is 15 days from the date of quotation

**Warranty** : 12 months from the date of supply.

Please feel free to Contact **Mr. Shrikant Mirkute on 8551098333** For any further Clarification /Information in this Concern.

**With Best Regards**

Shailesh Bhoir
8551091333
For NIHVA Technologies Pvt Ltd