

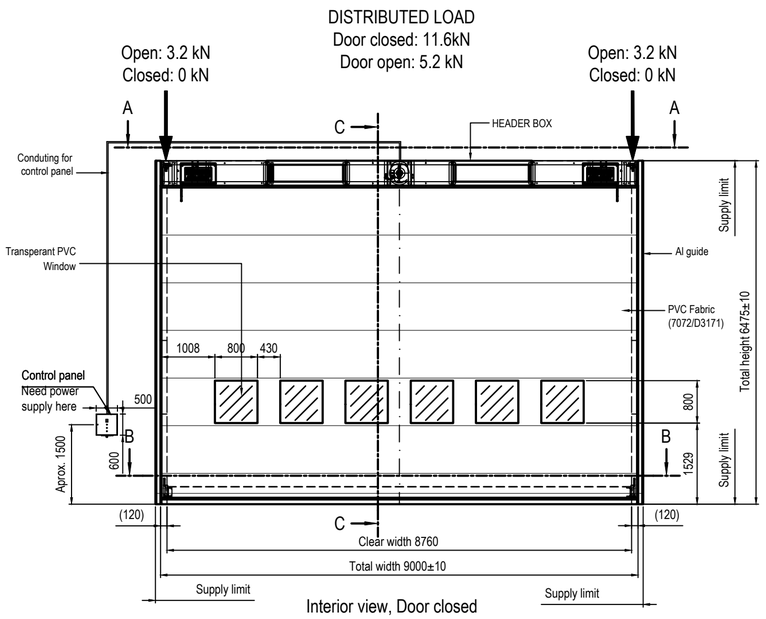


Interior view, Door closed

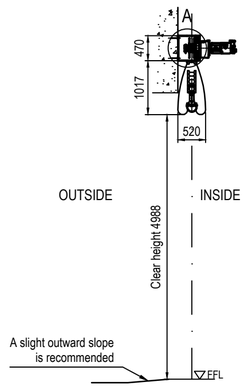

SECTION C-C
Open door
Scale 1:50

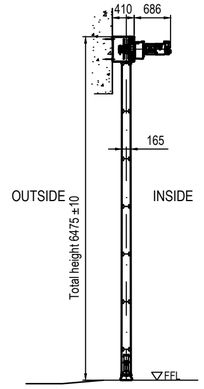

SECTION C-C
Closed door
Scale 1:50

NOT INCLUDED IN DOOR SUPPLY:

1. Design and supply of all door supporting structural components.
2. Design and supply of all closure between door and adjacent steel.
3. Door jambs adjustable for overall door width and true to plumb.
4. Paint job after completed door installation.
5. Any frameworks being provided by ASSA ABLOY will be clearly indicated as "by ASSA ABLOY".

REQUIREMENTS ON BUILDING:

6. Door head support must be straight within 1/600 of span in the in/out direction and free from protrusions of any kind.
7. For a single door leaf, door head support should be horizontal and straight within 1/600 of span at distributed full door load.
8. Door side jambs must be smooth, straight and parallel, out of plumb must not exceed 2mm/m (total deviation at full length 5 mm) in any direction.
9. Any footings at bottom of jamb columns must not interfere with installation of guide rails at floor level.
10. At time of installation, finished floor, free from obstructions, out to a distance of 2 m on each side of door centreline must be available.
11. Header box must be accessible from both sides during installation.

DOOR PROPERTIES:


12. The door is designed to withstand a differential pressure of 1.15kPa x 1.5 FOS.
13. Guide rails, top- and intermediate beams in extruded aluminium with natural finish.
14. Color of header box: BLACK (NCS 9000-N. RAL 9005)
15. Color of door fabric: Color code of door fabric: RAL 7004 (7072/ D3171)
16. Metal trim: motor side

ELECTRICAL:

17. One main control panel provided of PLC type.
18. Audible and visual alarm
19. Back-up power switch
20. Safety edge
21. Approx. size of main control panel: WxHxD (500mm x 600mmx250 mm),
22. Power: 2.7kW
23. Nom. current: 6.4A
24. (max. allowed voltage drop at start: 5%)
25. Power supply required: 3 Phase, 440 Volts, 16 A

BELT HOIST UNITS:

SK 873.1-100L/4 Z dual brake

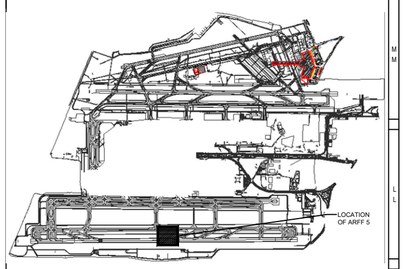


KEY PLAN (NOT TO SCALE)

NOTE:


1. 340 MM RCC COLUMN REQUIRED FOR GUIDE MOUNTING.
   IF RCC COLUMN NOT AVAILABLE THEN WE WILL REQUIRE MS STRUCTURE FOR THE SAME.

REFERENCE DRAWINGS :


DIAL–LT–D–UTL–A–20–100 : ARFF4 FIRE STATION ELEVATIONS
DIAL–LT–D–UTL–A–20–101 : ARFF4 FIRE STATION ELEVATIONS
DIAL–LT–D–UTL–A–10–100 : ARFF4 FIRE STATION GROUND FLOOR PLAN

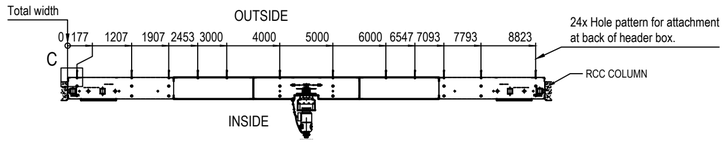


SECTION A-A (Scale 1:50)
Hole pattern for header box attachment

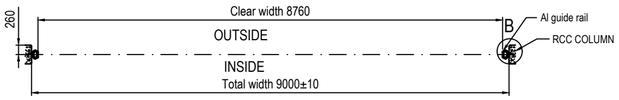


SECTION B-B
Door leaf is not shown for clarification
Scale 1:50




DETAIL C, SCALE (1:10)
ANCHOR POSITION FROM COLUMN

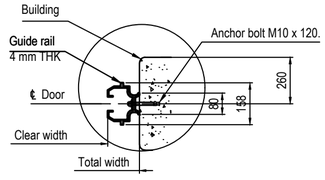


DETAIL B, SCALE (1:10)
GUIDE RAIL MOUNTING DETAILS

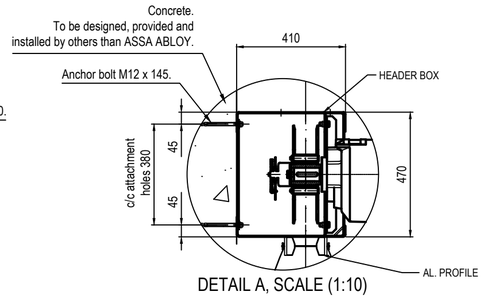

DETAIL A, SCALE (1:10)
HEADER BOX MOUNTING DETAILS

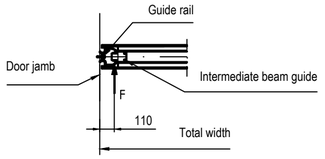

Force by differential pressure transferred to guide rail at each intermediate position.
F=4.7 kN



Load on header box attachment (each screw), due to wind load and door weight

SHOP DRAWING
Building: ARFF5

REV.NO.	DESCRIPTION	DESIGNED	DRAWN	CHECKED	APPROVED
B	Revised, issued for approval.	15.11.2021 G.L.P	15.11.2021 G.L.P	15.11.2021 A.K.	15.11.2021 V.T.
A	Issued for approval	30.10.2021 G.L.P	30.10.2021 G.L.P	30.10.2021 A.K.	30.10.2021 V.T.

REVISIONS

CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE
ARCHITECTURE			HVAC			GIS		
CIVIL & STRUCTURAL			FPS			GEOTECH.		
ELECTRICAL			PIPING			AIRPORT SYSTEMS		
ELV SYSTEM			PHE			INTERFACE		

DELHI INDIRA GANDHI INTERNATIONAL AIRPORT · GMR · L&T Construction

CLIENT : DELHI INTERNATIONAL AIRPORT LIMITED

PROJECT: INDIRA GANDHI INTERNATIONAL AIRPORT PHASE-3A DEVELOPMENT WORKS

CONCEPT : ASSA ABLOY

PROJECT CONSULTANT: Engineering Design and Research Center (EDRC), L&T Construction

INSTALLED AND SUPPLIED BY: NANA TECHNOLOGIES PVT LTD

JOB No : JOBNO.

	NAME	SIGN	DATE
DSGN	G.L.P		02.10.2021
DRWN	G.L.P		02.10.2021
CHKD	A.K.		02.10.2021
APPD	V.T.		02.10.2021

TITLE: ARFF5 MEGADOOR 8760 X 4988 (RS7)

SCALE 1:50

DRAWING No. DIAL-LT-Q-UTL-A-10-104

SHEET:

PROJECTION FIRST ANGLE

SIZE A3 · REV B

RELEASED FOR ☐ PRELIMINARY ☐ TENDER ☐ INFORMATION ☑ APPROVAL ☐ CONSTRUCTION