NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

RATILAL BHAGWANDAS CONSTRUCTION COMPANY
Pune

Date : 24.12.2020
Quote NO : SQT.20.21.2901R
Kind Attn : Ms.Ashwini Udge
Email Id : ashwini.udge@ratilal.in
Contact No: 9850976739

Project, Location : Silvassa

Subject : Revised Quotation for Honeycomb Grill MS Motorized Rolling Shutter.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**MS Motorized Rolling Shutter - Honeycomb Grill**	4500	5000	1	224,000	224,000	20,000	20,000
	Total			**1**		**224,000**		**20,000**
2	P&F Charges			3%		6,720		
	Total Without Taxes					230,720		20,000
3	GST Extra @ 18%			18%		41,529.60		3,600
	Total With Taxes					**272,250**		**23,600**
4	Transportation Charges					**Extra At Actual**		
5	Unloading Charges @ Site					**In Client Scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Motorized Rolling Shutter with Honeycomb Grill

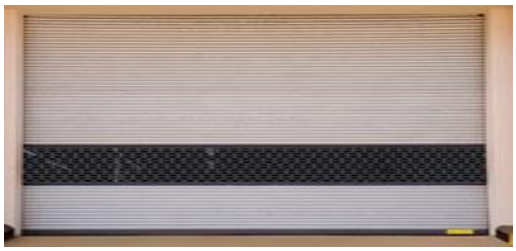

Sr .No.	Specification	Motorized Rolling Shutter with Honeycomb Grill
1	**Description:**	Motorised Rolling Shutter with MS Laths with thickness of 1.25 mm.
2	**Mounting Location area**	Inside area / Outside area
3	**Mounting Surface**	Side Brackets: Optional = On Concrete /Steel & Side
4	**Curtain Panel**	The panel made of 1.25mm thick.
5	**Curtain panel size**	75mm wide
6	**Curtain Profile**	Curved with 1000mm Honeycomb Grill to be installed at eyelevel height
7	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	**Side Guide Profile**	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
9	**Roller Shaft**	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	**Side Brackets**	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm GF mm with 25x25x3mm angle stiffener
12	**Surface finish**	PU paint or Powder coated
13	**Drive Unit & Mounting Type**	Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description
1	Secured and fully covered Store area to keep the material
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil / masonry/structural work required
5	All structure support required
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.
7	Conduits, Cables required

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 5 - 6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr. Bhavin Jain on 8551092333** For any further Clarification /Information in this Concern.

With Best Regards
Pradeep Shinde
7219206333
For NIHVA Technologies Pvt Ltd