


| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUFFER SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2030 | 2500 | 480 | 400 | 200X300X100 |


| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2080 | 2580 | 485 | |

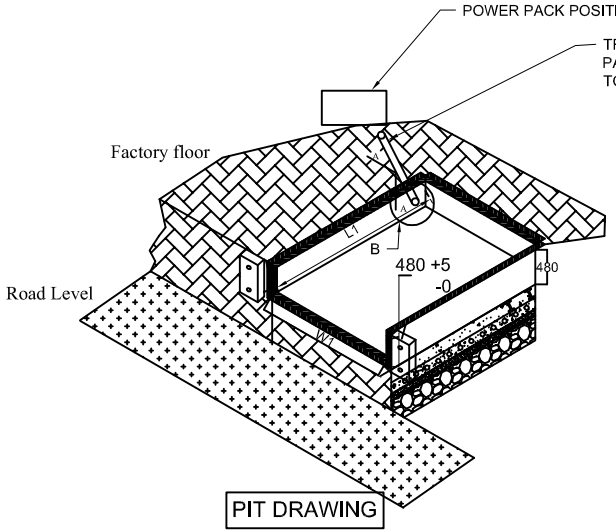



PIT DRAWING




NOTE: -

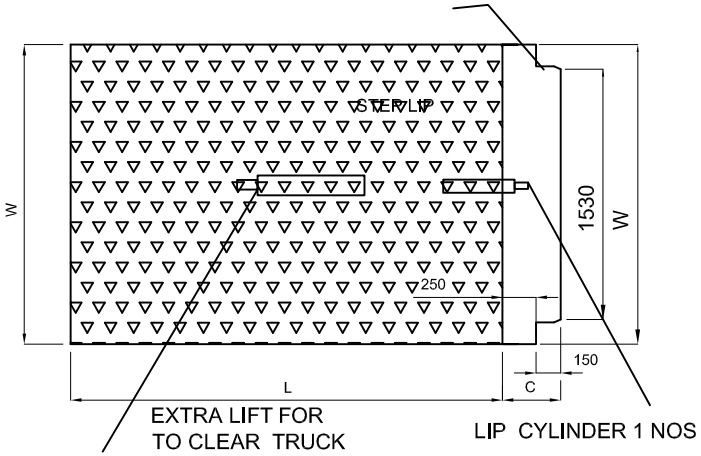1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY CABLE LENGTH STD. 7000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING ( IF ORDERED )
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ±15 MM
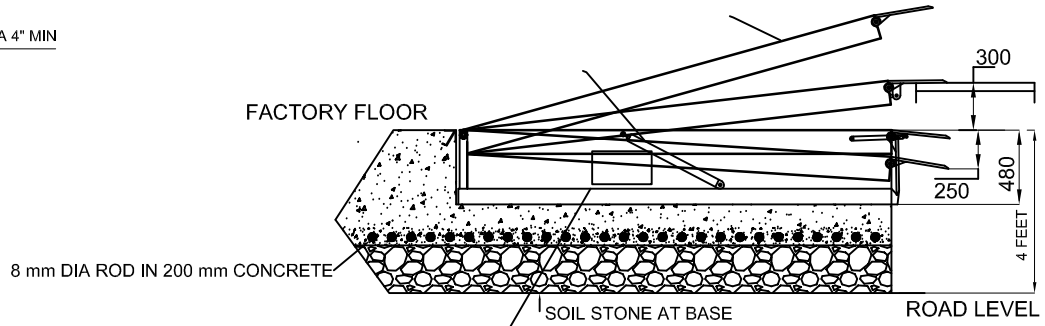
# DOCK LEVELER- 9 TON CAPACITY

| CLIENT APPORVAL- | | NIHVA TECHNOLOGIES PVT. LTD. |
|---|---|---|
| DRAWN :- | DATE : - | CLIENT - |
| CHECK:- | DATE : - | PROJECT - |
| ALL DIMENSION ARE IN mm | | SITE - |
| If any queries contact : projects@nihva.com | | DWG. NO. - |


NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com