NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No - SQT/18-19/2430 **Date : 11.02.2020**

Alstom Transport India Limited
: Sodepur,
34 B T Road, Kolkata- 700115,
WestBengal, India

Kind Attention : Mr. Kaushik
Email ID : kaushik.paine@alstomgroup.com
Contact No : 9434216905

Project Name And Location :WestBengal, India .

Subject : Battery operated mobile crane

Dear Sir
Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.

This has reference to your above mentioned requirement as well as our subsequent communication; please find below our best offer.
Commercial Offer

Sr. No.	Description	Qty	Unit	Rate In INR	Net Amount INR
A	**Battery Operated Mobile Crane**				
1	Capacity: - Up to 3000 kg	5	No	1,600,000	8,000,000
	Total				**8,000,000**




GST Pune	27AAECN0437H1ZM

Total Amount	8,000,000

TECHNICAL SPECIFICATION - BATTERY OPERATED MOBILE CRANE

Sr. No	Description		Unit	Specification
1	Capacity		Kgs	2000
2	Load Center		mm	350
3	Overall Length		mm	2000
4	Overall Width		mm	1000
5	Overall Height		mm	2160
6	Boom Tilting UP/Down		Deg	45°/10 °
7	Boom length (Close)		mm	2800
8	Boom Extended		mm	4000
9	Drive Motor - Traction		Kw	2 AC
10	Lifting Motor		Kw	3
11	Battery		V/ Ah	24 / 480
12	Drive Speed Unladen / Laden		kmph	5 to 4
13	Wheel Drive - PU			240 X 100
14	Wheel Load - Rubber X 4			16" X 5 "
15	Boom Operation			Hydraulic
16	Parking brake			EMB
17	Load carrying capacity at	465mm		3000
		1000mm		1350
		2000mm	Kgs	650
		3000mm		450
		4000mm		300

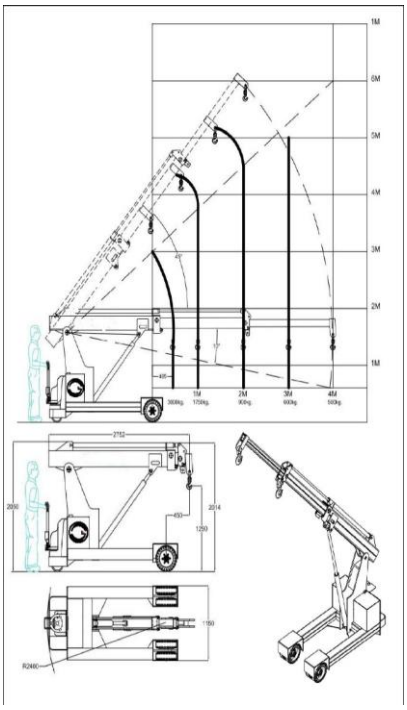

General Prerequisites Required at Site

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery
4. Fork lift/crane to be provided if required .
5. Scaffolding require for Installation it is in client scope.

Limit of Supply

1. Provide place to store the material to be installed .
2. Be responsible for the safe custody of all material
3. Provide place to safely store all the tools of installation
4. Provide change & rest room for the workers.

Quote/Supply is based on

1. BOM is calculated as per standard quantity measurement
2. In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage will be to customer account
3. Billing will be as per the supply of material ,not as per site measurements

The supply included only those mentioned in the quote & does not include

1. Unloading from truck placement on site
2. Electrical connection for control panel.

Client Scope

1. Once our project gets complete for any additional work to & fro loading & boarding of our service technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope
3. All structure support is in client scope
4. NIHVA Will provided structure drawing only if required
5. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

Terms and Conditions :

1	**Price**	:	Ex Works Pune
2	**P & F Charges**	:	@3% of Total Supply Value
3	**Freight Notes**	:	Extra As applicable
4	**Delivery**	:	9 - 10 weeks from the date of receipt of confirmed purchase order, Advance Payment and Drawing approval.
5	**Payment**	:	80% Advance along with Confirmed Purchase Order and balance before dispatch.
6	**Insurance**	:	Extra As applicable
7	**Tax**	:	GST @18% Extra
8	**Validity**	:	15 days from the date of quotation.
9	**Warranty**	:	12 months from the date of supply.

Please feel free to contact **Mr. Arjun Patil on 8551096333** For any further Clarification in this concern

With Best Regards

Ulka
7219206333
For Nihva Technologies Pvt Ltd