



DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2030	2720	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2080	2770	485	

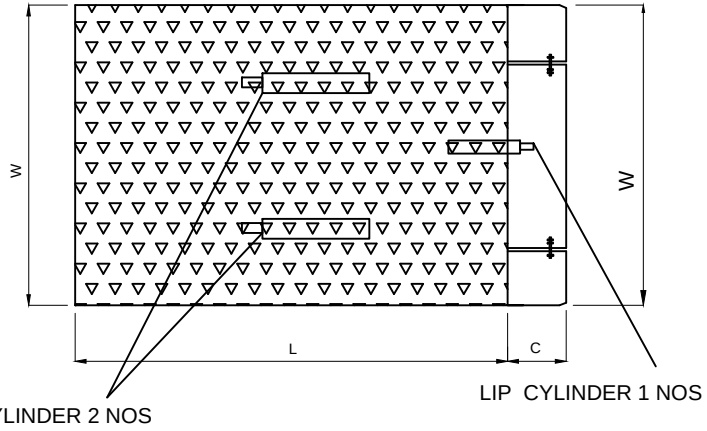



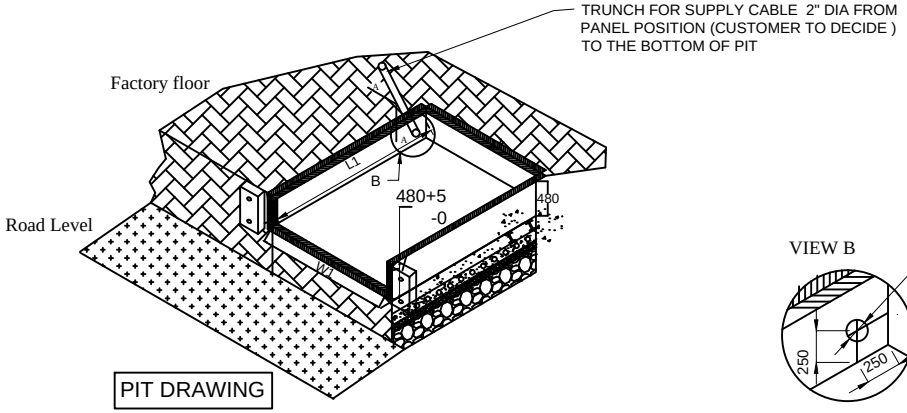



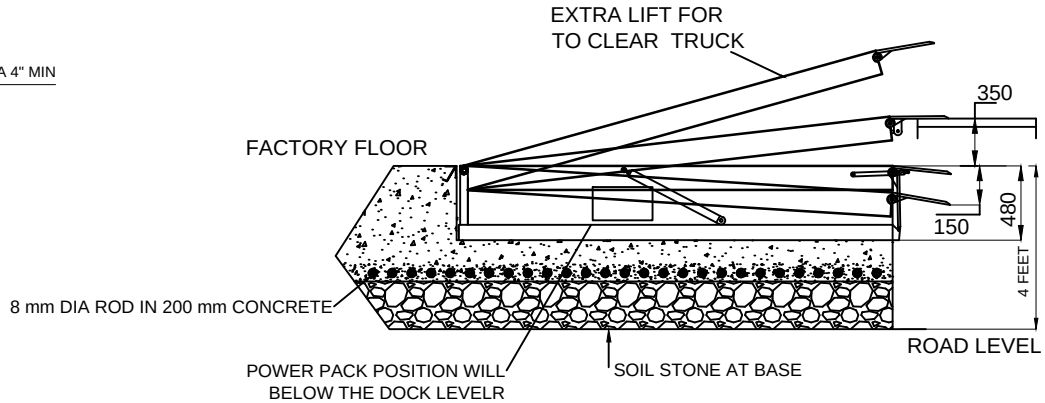

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

DOCK LEVELER- 9 TON CAPACITY - 2QTY.

CLIENT APPORVAL-			NIHVA TECHNOLOGIES PVT. LTD.
	DATE	SIGN.	
DRAWN :- SURAJ	04/05/2017		CLIENT -SCON
CHECKED:SAGAR P	04/05/2017		PROJECT-AXALTA COARING SYSTEMS INDIA PVT LTD.
ALL DIMENSION ARE IN mm			SITE -VADODARA,CRRJARAR.
If any queries contact : projects@nihva.com			DWG. NO. - NIHVA/17-18/0059

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com