


| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUFFER SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2200 | 3000 | 480 | 400 | 200X300X100 |


| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2250 | 3070 | 485 | |

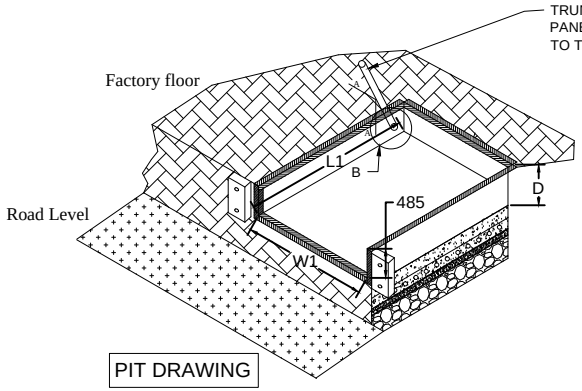



PIT DRAWING




# DOCK LEVELER- 6 TON CAPACITY

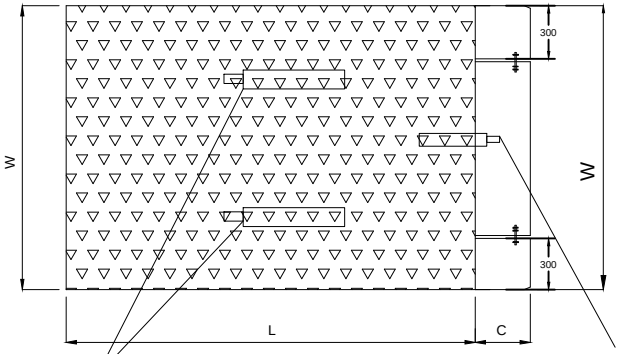NOTE: -

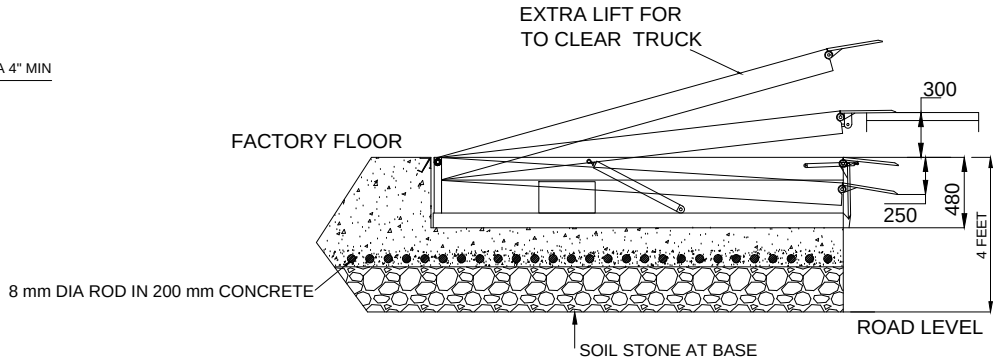1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY CABLE LENGTH STD. 7000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 10000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING ( IF ORDERED )
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

| CLIENT APPORVAL- | DATE | SIGN. |
|---|---|---|
| DRAWN :- OMKAR | 04/01/2018 | |
| CHECKED :- S.S. | 04/01/2018 | |
| APPROVED :- S.S. | 04/01/2018 | |
| ALL DIMENSION ARE IN mm | | |
| If any queries contact : design@nihva.com | | |


NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com


CLIENT - Central Logistics Center

PROJECT -

SITE - Chakan

DWG. NO. - NIHVA/17-18/0326