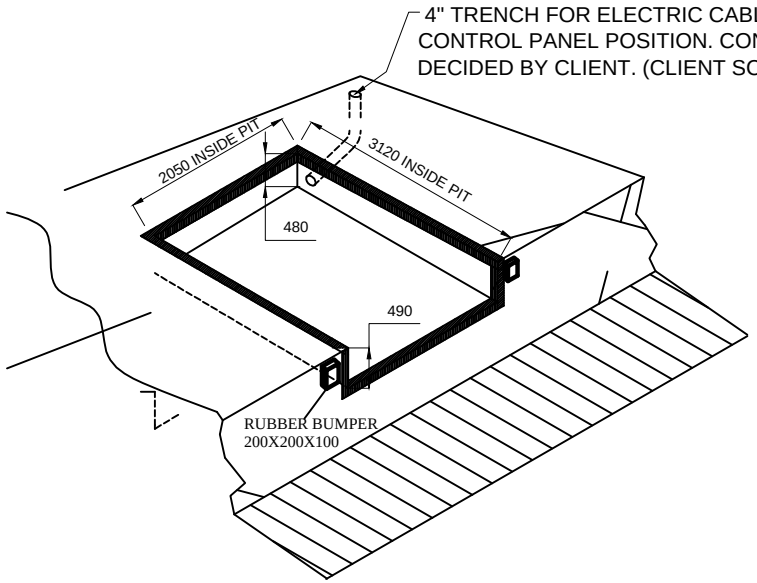

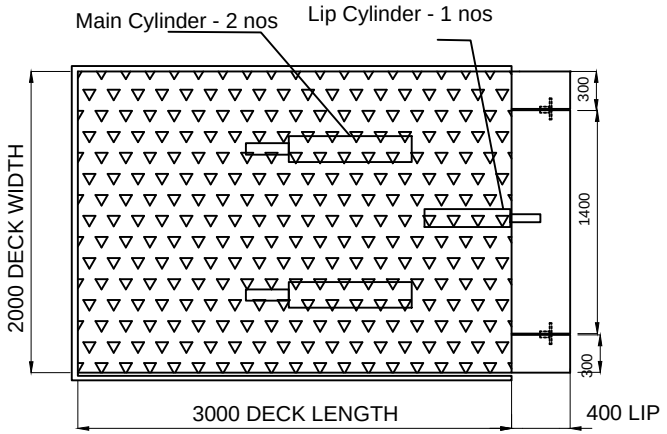

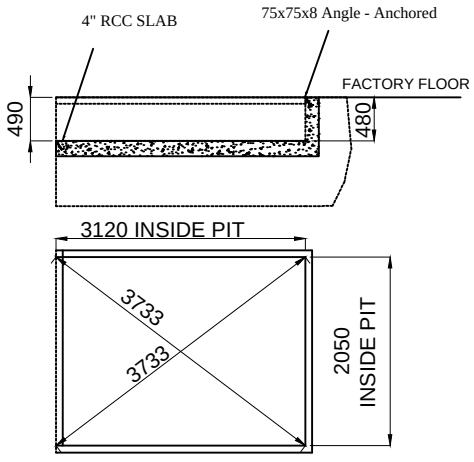

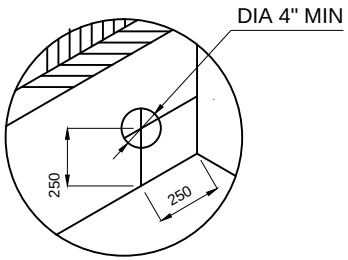

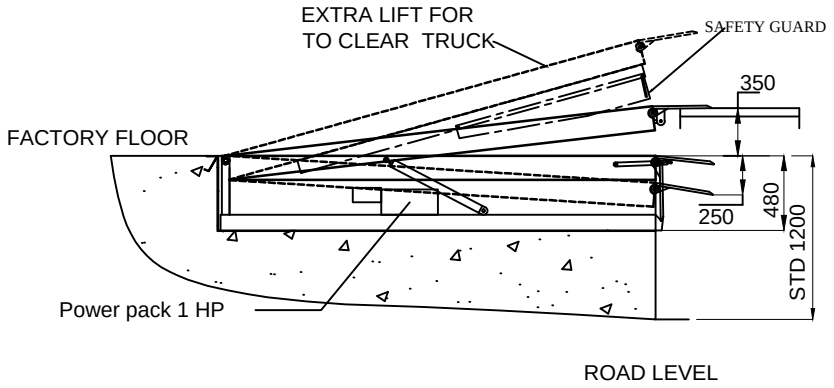

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE CONTROL PANEL POSITION
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM
5. DOCK LEVELER TYPE : ELECTRO HYDRAULIC DOCK LEVELER
6. POWER PACK- 1 HP/ 440 AC SUPPLY
7. DOCK LEVELER WILL BE INTERLOCKED WITH SECTIONAL DOOR AND SCISSOR LIFT.
8. SURFACE FINISH : HOT DIP GALVANIZING
9. CAPACITY : 1.5 TON

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE			
PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER			NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	G.P.	16.8.2021	CLIENT - SHUBHSHREE ENGINEERING
CHECK	A.K.	16.8.2021	PROJECT - E+H
APPROVAL	V.T.	16.8.2021	SITE -
REV.	01	03.9.2021	DWG. NO. : NIHVA/21-22/208
If any queries contact : design@nihva.com			SCALE: NTS / WT: / SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com