


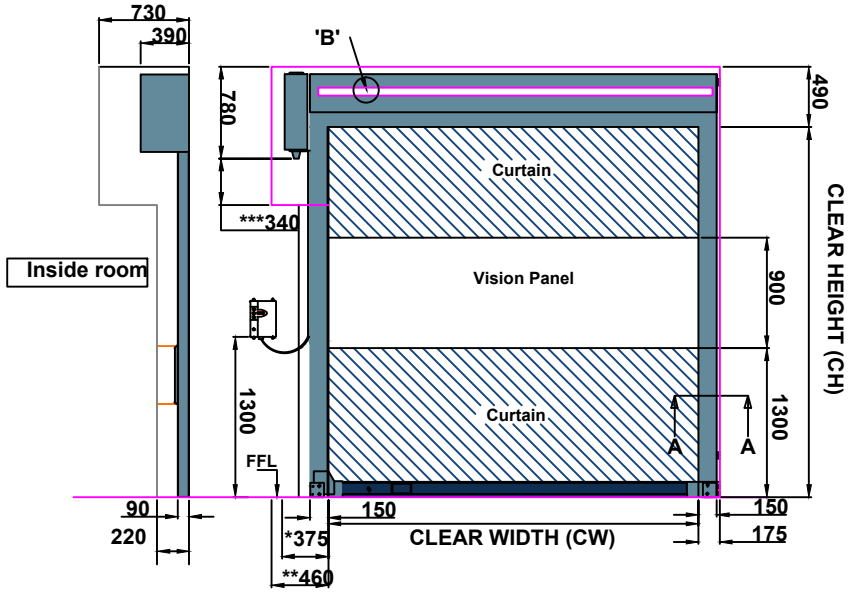


INSIDE ELEVATION

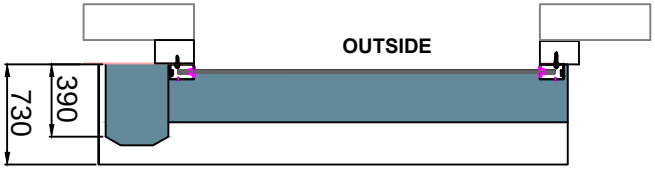

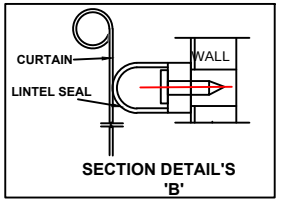

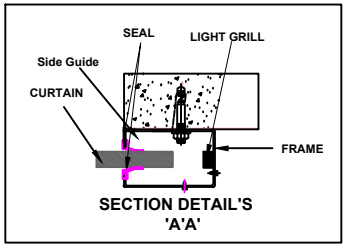

ELCTRICAL REQUIREMENT FROM CLIENT AT SITE-

1) 16A 3 Pin Industrial type female Metal clad socket 230V, 50Hz, with earthing around 1/2 Meter From Controller

2) Clean Uninterrupted Power Supply WithOut Voltage Fluctuations Needed.

3) Solid State Inline (UPS/Stabilizer) 2kva Capacity Required

REQUIREMENT -
(1) MOTOR ON LEFT AS SEEN FROM INSIDE
(2) 5 M LENGTH CABLE FROM MOTOR

Notes:

1) Operator is on Left side.
2) Controller is Always On Operator Side
3) Required All Civil work , MS Structure & Fitting is in client scope.
4) High Speed door will be installed after readiness of structure as per drawing provided.

*** Space for fiting the door**
**** Space require for fit and dismantle the operator**
***** For Emergency Crank Handle**

3415 MM	4300 MM	1 NO	RAL 5010	ON STRUCTURE
CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY	RAL COLOUR CURTAIN PANEL	MOUNTING

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE- HIGH SPEED DOOR

	NAME	SIGN	DATE
DRAWN	SIDDHESHWAR		9.12.2020
CHECK			
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -

If any queries contact : projectsupport@nihva.com
DWG. NO. : NIHVA/20-21/VDR/0085 REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: