


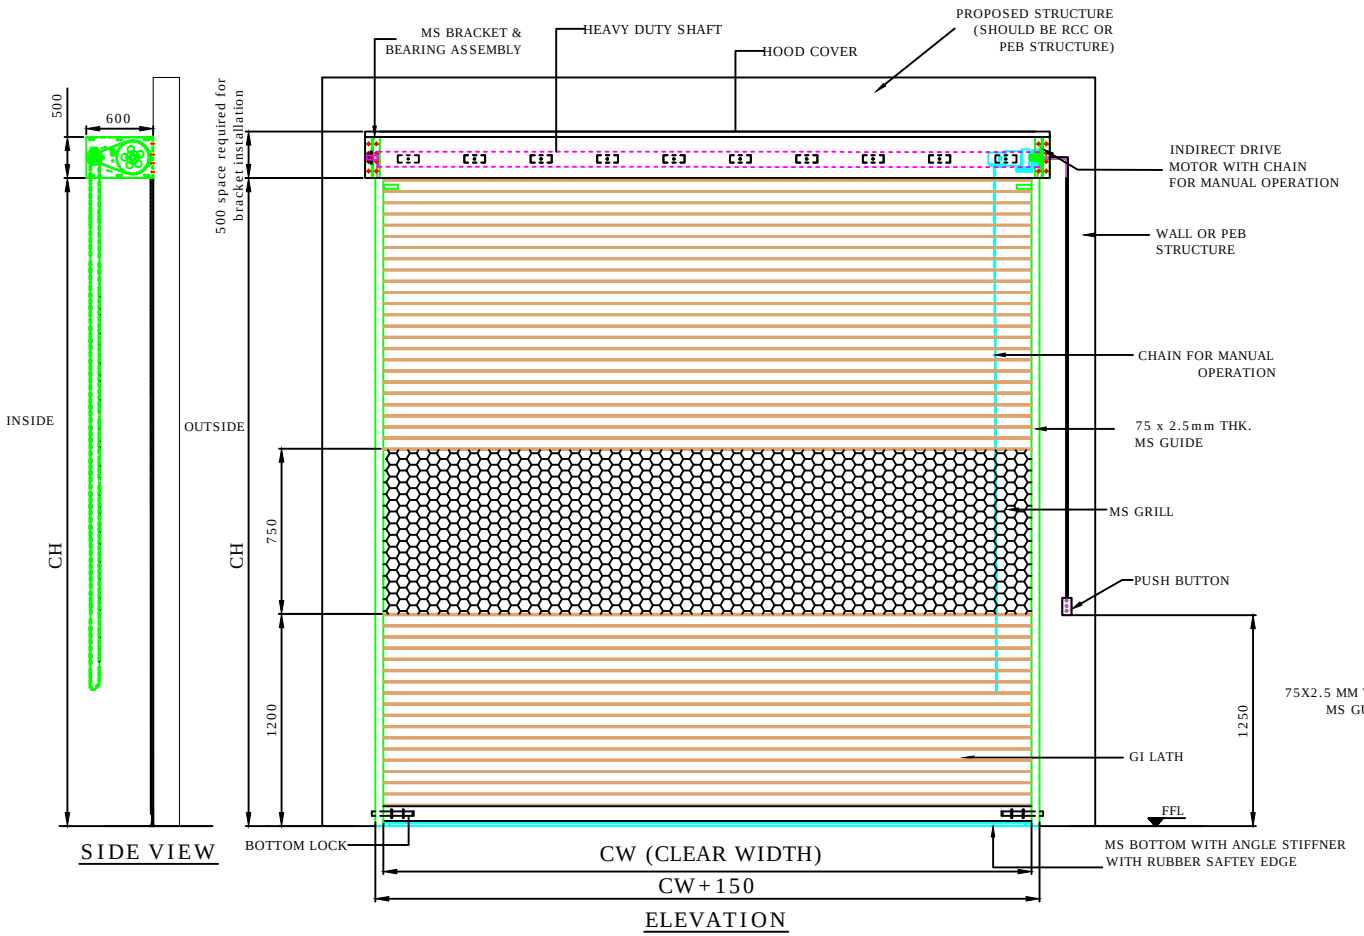


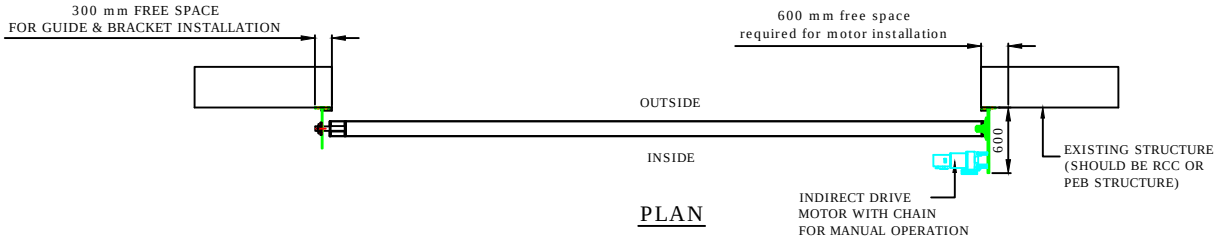

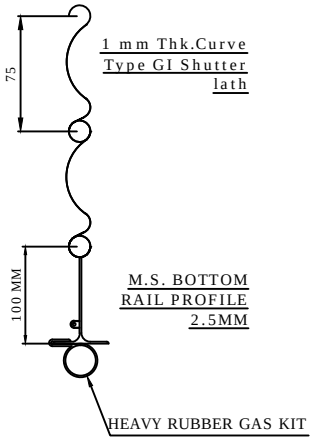

M.S. BOTTOM RAIL PROFILE 2.5MM

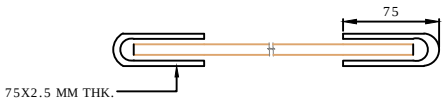

NOTE- SHUTTER SIZE 3000X3000 & 2500X3000 HAVE PERPENDICULAR WALL AT LEFT SIDE VIEWED FROM INSIDE SO IT WILL REQUIRE STRUCTURE OF 150mm AT LEFT SIDE FOR BRACKET & GUIDE INSTALLATION.
( ) VALUE SHOWS ACTUAL WIDTH CLIENT WOULD GET.

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY	LOCATION
3500	3000	01 NOS	ELECTRICAL SUBSTATION FACTORY AREA
3000(2850)	3000	01 NOS	ELECTRICAL SUBSTATION FACTORY AREA
2500(2350)	3000	01 NOS	ELECTRICAL SUBSTATION BUILDING

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
3500	3000	01 NOS
3000	3000	01 NOS
2500	3000	01 NOS

MATERIAL:

THICKNESS :

NOTE:
1.REQUIRED STRUCTURE FOR ROLLING SHUTTER WILL BE CLIENT'S SCOPE.
2.ONE COAT OF RED OXIDE PRIMER WILL BE GIVEN TO THE SHUTTER.
3.SINGLE PHASE. 3 CORE 1.5 SQ. CABLE REQUIRE AT SITE(CLIENT'S SCOPE)
4. FOR FINAL FINISH CLIENT SHOULD CONFIRM RAL COLOR SHADE.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

MOTORIZED ROLLING SHUTTER

CLIENT'S APPROVAL :

CLIENT - TATA PROJECT

PROJECT -

SITE LOCATION - HYDERABAD

DWG. NO. : NIHVA/17-18/0010

SCALE: NTS	WT:	SHEET:1 OF 1
DRAWN BY: SURAJ	DATE: 26-04-2017	
CHECK BY : SAGAR P.	DATE: 26-04-2017	
APPROVED BY : R.K	DATE: 26-04-2017	

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGN IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.