NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Facilities And Building Solutions Pvt. Ltd.
12/26, River view Apartment, First floor,
Off Mumbai-Pune road, Wakdewadi,
Pune -411003

Date : 26.02.2020
Quote NO : SQT.19.20.2414R
Kind Attn : Ms.Darshana Bhagadkar
Email Id : puneqs@fabs.co.in
Contact No: **8087002501**

Project Name & Location: Satara Mega Food Park

Subject : Revised Quotation for High Speed Door, Sectional Door, Dock Leveller

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2,3,4
C.	General Conditions	5
D.	Terms & Condtions	5

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**High Speed Door (NIHVA Make)** Below Extra items are considered in Price • Push Button Both Side • Pull Cord Both Side	2000	3000	17	2,20,000	**37,40,000**	-	Included
2	**High Speed Door (NIHVA Make)** Below Extra items are considered in Price • Push Button Both Side • Pull Cord Both Side	2400	3000	4	2,20,000	**8,80,000**	-	Included
3	**Sectional Door (ASSA ABLOY)** Below Extra items are considered in Price • Push Buttons Both Side • Interlocking Between doors • Structure	3000	3500	4	2,84,000	**11,36,000**	-	Included
4	**Dock Leveller (NIHVA Make)** • PU Paint • Pair of Dock Bumper With Steel Support	2000	3000 (Length)	4	2,00,000	**8,00,000**	-	Included
			Total			**65,56,000**		
	P&F Charges			0%		-		
	Total Without Taxes					**65,56,000**		-
	GST Extra @ 18%			18%		11,80,080		-
	Total With Taxes					**77,36,080**		-
5	Transportation Charges					**In NIHVA Scope**		
6	Unloading @ Site					**In Client Scope**		

Additional Accessories Price

Sr. No.	Optional Items	Price
1	Magnetic Loop Detector	36,000
2	Radar sensor for Humans and Material	35,000
3	Remote control for operation - 1 No	9,500
4	Trafiic light (red and green)	9,500

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

High Speed Door (NIHVA Make)



High Speed Door



Control Box

- Safe & for continous operations
- Self Supporting Construction with anti crash protection system for bottom profile
- Smooth & silent opening & closing
- Can be equipped with full vision PVC curtain
- Modular Interchaegable panels permit to replace worn & damged panels

Sr. No	Description	Specifications
1	Application	Internal Door
2	Speed	Inverter Motion system to adjust different speeds, with progressive control of acceleration & deceleration during braking
3	Opening speed	1 m/s
4	Closing speed	1 m/s
5	Fabric material & specification	Self extimgushing, Fabric Transparent PVC section
6	Vision panel	Vision for full width and 600 high considered
7	Gasket	Gaskets on side and rubber at bottom
8	Control Panel	4 Push Button operated
9	Security Features	EN 13241-1 Standard
10	Resistance to wind load	EN12424 upto class 2
11	Curtain	Fabric Transparent PVC section
12	Guide Material	Aluminum
13	Hood Cover	GI
14	Motor Cover	GI
15	Operator & Control	German Make Motor
16	Connecting Voltage	220V , 1Ph , N
17	Open-Stop-Close Button	Standarad
18	Protection Category	IP 54 / IP 65
19	Power Consumption	0.75 kw Motor
20	Emergency Off Button	Standard
21	Closing Zone Monitoring	Optical Safety edge
22	External Route Monitoring	Photocell
23	Emergency Opening	Crank Handle
24	Push Button	Inside & Outside area
25	Electrical safety edge sensor	Included
26	Pull Chord	Included on Both Side

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019


An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM


Sectional Door (ASSA ABLOY)



OH1042P



Standard Lift




Sr. No	Description	Specification
1	Model No	ASSA ABLOY OH1042P
2	Opening Direction & Mounting	Standard
4	Opening/Closing Speed	CDM9 0.28 m/s
5	Door Material	GI Steel
6	Width of each Pannel	545mm
7	Vision Pannel	3 Vision Pannel of 600 X 290
8	Gasket	Top bottom and Side seal
9	Panel Thickness	42 mm Square Grid, steel sheet
10	Filling	CFC-free polyurethane
11	Door sealent	All door sealants made of EPDM rubber, temperature resistant -30/+70
12	Water Penetration	EN 12425 class 3
13	Air Permealibity	EN12426 class 3
14	Thermal Transittance	EN 12428 1.10W /m2K
15	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
16	Door saftey	Doors equiped with spring break device
17	Incase of Power failuer	Doors to be equiped with quick release fuction
18	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
19	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
20	Emergency Operation	by Disengagement rope manual
21	Operating Switch	Up/Down Keypad + stopbutton
22	Locks : Lock bolt	The Lock bolt locks the door from the inside, without the use of a key. The Lock bolt is not visible from the outside.
23	Environmental Green Product Declaration Certification	As per ISO 14025 and EN 15804
24	Key Switch	Included
25	Push Button	Inside & Outside Area
26	Photocell	Included
27	Safety edge	Included
28	Interlock between adjucent door , dock & door	Included
29	Handels	1 Handle
30	Structure	Included

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

Dock Leveler (NIHVA Make)

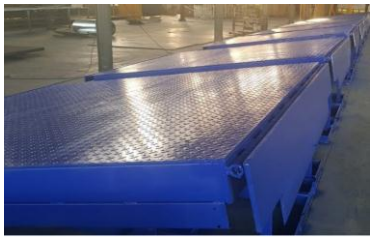



Sr. No.	Description	Specifications
1	Capacity	6Ton (Point Load)
2	Dock operation mode	AC power pack hydraulically operated
3	Lip operation mode	Hydraulic
4	Operation control	Through panel
5	Loading platform height from road	1250mm
6	Travel above & below dock level	(+) 550 / (-) 350 mm
7	Platform Size (W x L)	2000 mm x 3000 mm
8	Lip size (W x L)	2000 x 400 mm
9	Shut Height	650 mm
10	Overall length	2000mm x 3000mm + Lip Length (400mm)
11	Maximum slope can be achieved	6 deg
12	Clear Pit dimensions (W x L x D)	(W) 2050mm x (L) 3000 mm x (D)655 mm
13	Hydraulic power pack	Standard
14	Driver type	Direct by electric Motor
15	Motor Ratings	1 H.P
16	Pump design flow	2.5 LPM
17	Pump pressure	120 bar Operating 200 bar Max.
18	Safety valve set pressure	120 Kg/cm²
19	Pump Type	Gear
20	Volume of oil receiver	7 Lit
21	No Of Deck cylinder	2 No
22	Lip Cylinder	1 No
23	Paint	PU Paint
24	Dock Bumper	Pair of Dock Bumper With Steel Support

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 5 - 6 weeks for High Speed Door.
9 - 10 weeks for sectional Door
4 - 5 weeks for dock Leveller
from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 40% Advance along with Confirmed Purchase Order, 50% Aginst Material Delivery & 10% Aginst Installation.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Arjun Patil on 8551096333**

With Best Regards
Vivek
8350570333
For NIHVA Technologies Pvt Ltd