NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Crane ChemPharma & Energy
E7/ E8- 2, Old MIDC, Satara, India, PIN Code- 415 004

Project, Location :

Date : 9.12.2020
Quote NO : SQT.20.21.2878
Kind Attn : Amol Mathapati
Email Id : AMathapati@CraneCPE.com
Contact No: 9922929097

Subject : Quotation for NIHVA MAKE Dock Leveler and ASSA ABLOY Dock Leveler.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	2
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**ASSA ABLOY Dock Leveler - 6 Ton**	2000	2500	2	562,000	1,124,000	20,000	40,000
2	**Dock Leveler - 12 Ton**	2000	2500	2	250,000	500,000	20,000	40,000
	Total			**4**		**1,624,000**		**80,000**
3	P&F Charges			3%		48,720		
	Total Without Taxes					1,672,720		80,000
	GST Extra @ 18%			18%		301,089.60		14,400
	Total With Taxes					**1,973,810**		**94,400**
4	Transportation Charges					Extra at atcual		
5	Unloading Charges @ Site					In Client Scope		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA Make Dock Leveller






Sr. No	Description	Specifications For 12 Ton
1	Required Capacity	12 Ton
2	Hydraulic Power pack	1 HP, 3PH
3	Control Panel	4 Push Button operated
4	Deck operation	By push button Deck UP & Deck Down
5	Lip operation	By push button Deck UP & Deck Down
6	Loading platform height from	4 feet (1200 mm)
7	Travel above from Dock level	350 mm
8	Travel below from Dock level	200 mm
9	Platform size	2000mm (W) x 2500 mm (L)
10	Lip sizes	400 mm
11	Clear Pit dimensions	2050mm (W) x 2500mm (L) x 485mm (H)
12	Drive type	Direct by electric Motor
13	Power Consumption	0.75 kw Motor
14	Degree of protection for motor	IP 55
15	Motor RPM	1410 rpm
16	Pump design flow	1.8 LPM
17	Pump pressure	200 bar
18	Safety valve set pressure	90 bar
19	Pump type	Gear
20	In built safety valve	Yes
21	Volume of oil receiver	8 Ltr
22	No of Deck Cylinders	2 Nos
23	Deck Plate Thickness	8 mm Chequered Plate
24	No of Lip Cylinders	1 No
25	Lip Plate	16 mm Thick Plate
26	Dock Bumpers	1 Pair included

ASSA Abloy - Crawford make Dock Leveller



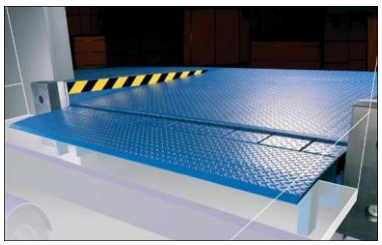

Sr. No.	Description	Specifications
1	Capacity	6 Ton
2	Platform Size (W x L)	2000 mm x 2500 mm
3	Travel above & below dock level	(+) 520 / (-) 350 mm
4	Lip size (W x L)	2000 x 400 mm
5	Control Unit Protection Class	IP 54
6	Magnetic Valves	24 V/ DC 18 W S1
7	Nominal Voltage	400 V, 3 Phase
8	Nominal Motor Power	1 HP
9	European	EN 1398

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description
1	Secured and fully covered Store area to keep the material
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil / masonry/structural work required
5	All structure support required
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.
7	Conduits, Cables required

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 8 - 9 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr. Ravindra Kharat on 7410169333** For any further Clarification /Information in this Concern.

With Best Regards
Shailesh Bhoir
7219206333
For NIHVA Technologies Pvt Ltd