NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Shubhshree Engineering & Constructions Pvt Ltd
Aurangabad

Date : 19.06.2021
Quote NO : SQT.18.19.1365R15
Kind Attn : Manish Sharma
Email Id : manishsharma@shubhshree.co.in
Contact No: 9175575106

Project, Location : Endress Hauser Flowtech Aurangabad

Subject : Revised Quotation for Scissor Lift, Motorized Sliding Gate, Wicket Gate, Dock Leveler

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2 , 3 ,4
C.	General Conditions	5
D.	Terms & Condtions	5

A) Commercial Offer

Sr No	Description	Qty	Size		Supply + Installation Charges in INR	
		(Nos)	Clear Width (mm)	Clear Height (mm)	Unit Price	Total Amount
1	**NIHVA Make Hydraulic Scissor Lift - 6T point load and 15T UDL (Pit Mounted)**	4	2000	2500	910,000	3,640,000
2	**NIHVA Make Hydraulic Dock Leveler**	4	2000	3000	270,000	1,080,000
3	**NIHVA Make Automatic Two Leaf Telescopic Sliding Gate**	1	6000	1800	470,000	470,000
4	**NIHVA Make Manual Wicket Gate**	1	1500	1800	60,000	60,000
		10				
	Total					**5,250,000**
5	P&F Charges	0%		**NIL**		
	Total Without Taxes					**5,250,000**
	GST Extra @ 18%	18%				945,000
	Total With Taxes					**6,195,000**
6	Transportation Charges		**Included**			
7	Unloading Charges @ Site		**Client Scope**			

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA Make Hydraulic Scissor Lift





Sr. No	Description	Specifications
1	**Capacity**	6T point load and 15T UDL
2	**Platform size**	(W) 2000 mm X (L) 2500 mm
3	**Shut ht**	1000 mm
4	**Max ht**	2200 mm
5	**Lift ht**	1200 mm
6	**Power Pack Inside Pit with Buzzer**	NIHVA Make
7	**Safety Railing**	Safety railing M.S SECTION 900 mm ht all side on platform & fixed
8	**Manual Lip**	3 Piece (240 + 1500 + 240) - 1 Side Only
9	**Maintenance Stopper**	2 Nos
10	**Push Button Pendent**	Flexible pendent with 5 mtr Cable - 1 No
11	**Control Panel**	Outside pit - 1 No
12	**Safety Bellow**	All side
13	**Hydraulic Cylinder**	Two numbers with Bore 150 X stroke 500 mm - NIHVA Make
14	**Hot Dip Galvanized**	As per IS Std
15	**Hose**	Parker Make
16	**Cable**	Polycab cables
17	**Hydraulic Oil**	Grade 68 - 125 Ltr
18	**Surface preparation**	Hot dip galvanised (Original)
19	**Fabrication**	3500KG


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA Make Hydraulic Dock Leveler

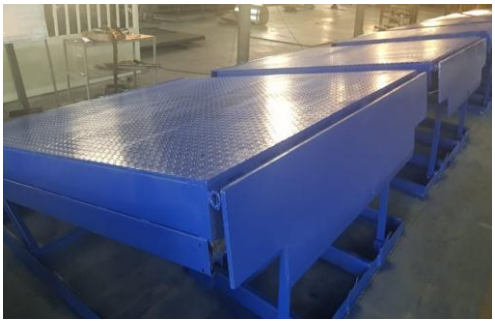



Sr .No.	Specification	Dock Leveller
1	**Capacity**	6 Ton
2	**Dock operation mode**	AC power pack hydraulically operated
3	**Lip operation mode**	Hydraulic
4	**Surface preparation**	Hot dip galvanised (Original)
5	**Operation control**	Through panel
6	**Power Pack**	NIHVA Make
7	**Loading platform height from road**	1200 mm
8	**Travel above & below dock level**	(+) 300 / (-) 250 mm
9	**Platform Size (W x L)**	2000 mm x 3000 mm
10	**Lip size (W x L)**	2000 x 400 mm
11	**Shut Height**	480 mm
12	**Maximum slope can be achieved**	0.1
13	**Clear Pit dimensions (W x L x D)**	(W) 2050 x (L) 3000 mm x (D)485 mm
14	**Hydraulic power pack**	Standard
15	**Driver type**	Direct by electric Motor
16	**Motor Ratings**	1 H.P
17	**Pump design flow**	1.5 LPM
18	**Pump pressure**	120 bar Operating 200 bar Max.
19	**Safety valve set pressure**	120 Kg/cm^2
20	**Pump Type**	Gear
21	**Volume of oil receiver**	5 Lit
22	**Hydraulic Cylinder**	NIHVA Make
23	**No Of Deck cylinder**	2 No
24	**Lip Cylinder**	1 No

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Motorised Two Leaf Telescopic Sliding Gate



Sr .No.	Specification	Motorised Two Leaf Telescopic Sliding Gate
1	**Door type**	Motorised Two Leaf Telescopic Sliding Gate
2	**Clear Opening gate dimension**	(W) 6000 mm X (H) 1800 mm
3	**Opening Direction**	Horizontal - from left to right or reverse
4	**Mounting Location area**	Inside area
5	**Design Pattern**	Standard Tubular Design Pattern
6	**Outer Frame Tube Sizes**	80 x 80 x 3.2 mm MS SQ. TUBE
7	**Internal Vertical Tube Sizes**	40 x 40 x 2 mm MS SQ. TUBE
8	**Gap Between Tubes**	100 mm C/C
9	**Bottom Rail on ground**	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	**Bottom Rollers**	Heavy Duty Bottom Wheel With both side Bearings
11	**Guide Rollers supporter during Gate movement**	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	**Painting**	Two Coats of Primer and Two Coats of Synthetic Enamel Paint
13	**Control Panel**	2 Nos Operating Station.(Motor Panel and Security Room)
14	**Operation**	By Telescopic Mechanism
15	**Accessories**	1. Limit Switch for Cut out when Gate is fully Closed
		2. Flashing Light & 3. Photocell

Wicket Gate

Sr .No.	Specification	Telescopic Sliding Gate
1	**Door type**	Manual Single Leaf Wicket Gate
2	**Size considered**	Clear opening - (W)1500 mm x (H)1800 mm
3	**Mounting Location area**	Inside area
4	**Design Pattern**	Standard Tubular Design Pattern
5	**Outer Frame Tube Sizes**	80 x 80 x 3.2 mm
6	**Internal Vertical Tube Sizes**	40 x 40 x 2 mm
7	**Gap Between Tubes**	100 mm C/C
8	**Painting**	2 Coats of EPOXY polyamide based enamel finish of approved Colour
9	**Operation**	Manually Opening

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

Note: Please find below List which are in Client Scope

Sr. No	Description	
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : FOR Site delivery

Delivery : 10 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 20% Advance along with Confirmed Purchase Order , 75% immediate after delivery material at site & 5% After installations (within 15 days installations must be carryout , if not need to release 5% immediately)

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 24 months from the date of supply invoice .

Please feel free to Contact **Mr. Vijay Tarak on 8551093333** For any further Clarification /Information in this Concern.

With Best Regards
Pradeep Shinde
8551096333
For NIHVA Technologies Pvt Ltd