

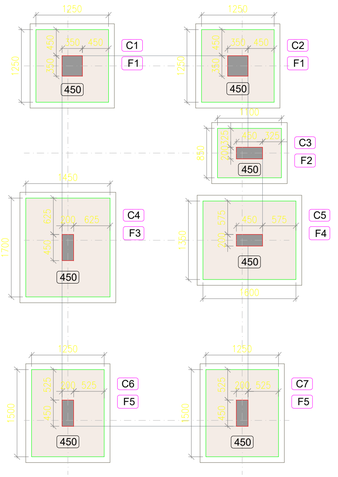


FOUNDATION LAYOUT

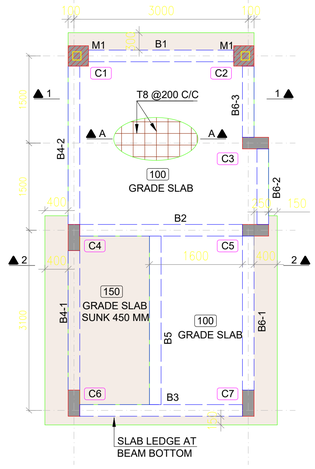


PLINTH LVL. FRAMING PLAN (UFL : +589.750 M)

NOTE:
'B' INDICATES BEAM SIZE 200x600, UNLESS SPECIFIED.
'M1' INDICATES STEEL COLUMN SIZE 150x150x8

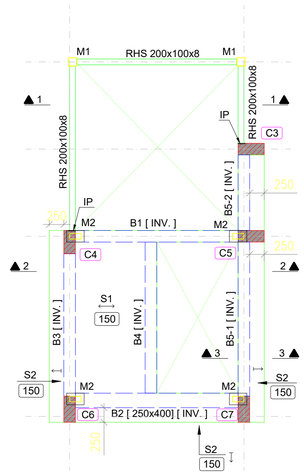


ATTIC SLAB LEVEL PLAN (+592.650 M)

NOTE:
'B' INDICATES BEAM SIZE 200x400, UNLESS SPECIFIED.
'M1' INDICATES STEEL COLUMN SIZE 150x150x8

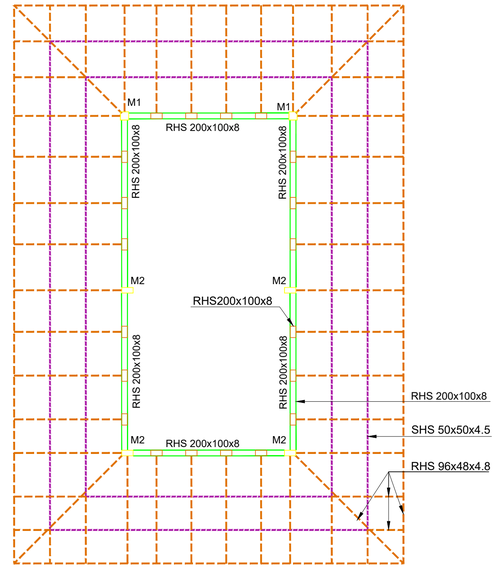

RAFTER END LVL PLAN (+593.510 M)

NOTE:
'M1' INDICATES STEEL COLUMN SIZE 150x150x8
'M2' INDICATES STEEL COLUMN SIZE RHS200x100x12

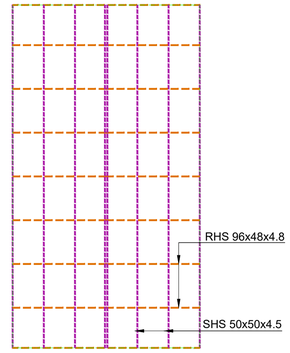

RAFTER TOP LVL PLAN (+595.950 M)



GENERAL NOTES

1. REFERENCE CODE IS456-2000
2. ALL THE DIMENSIONS ARE IN MM UNLESS SPECIFIED.
3. ALL THE REINFORCEMENT BARS SHALL BE OF GRADE FE 500.
4. DIMENSIONS OTHER THAN STRUCTURAL TO BE VERIFIED WITH ARCHITECT.
5. SBC OF THE SOIL IS CONSIDERED AS 30T/Sqm AS PER GEOTECHNICAL REPORT
6. GRADE SLAB TO BE REST ON COMPACTED SOIL WITH PROCTOR DENSITY GREATER THAN 90%.

ITEMS	COVER	CONCRETE GRADE
FOUNDATION	50mm	M30
COLUMN	40mm	M30
BEAM	20mm	M30
SLAB	20mm	M30

FOOTING & COLUMN SCHEDULE

REMARK			STOP AT PLINTH LVL.	-	-	-	-
COLUMN NOS.			C1, C2	C3	C4	C5	C6, C7
COLUMN DETAIL FROM FOOTING TO RAFTER END LVL	SIZE	M30	200 x 450	200 x 450	200 x 450	200 x 450	200 x 450
	REBAR [NO - DIA.]		4 T16 + 4 T12	8 T12	8 T12	8 T12	8 T12
COLUMN REINFORCEMENT AND LINK DETAIL			T16 T12 LINK DETAIL	LINK DETAIL	LINK DETAIL	LINK DETAIL	LINK DETAIL
FOOTING REBAR	PARALLEL TO LENGTH		T10 - 150 (B2)	T10 - 150 (B2)	T10 - 150 (B2)	T10 - 150 (B2)	T10 - 150 (B2)
	PARALLEL TO WIDTH		T10 - 150 (B1)	T10 - 150 (B1)	T10 - 150 (B1)	T10 - 150 (B1)	T10 - 150 (B1)
FOOTING DEPTH	D (mm)	M30	450	450	450	450	450
FOOTING SIZE	L x B (mm)		1250 x 1250	1100 x 850	1700 x 1450	1600 x 1350	1500 x 1250
PCC (100mm)	L x B (mm)	M10	1450 x 1450	1300 x 1050	1900 x 1650	1800 x 1550	1700 x 1450
COLUMN NOS			C1, C2	C3	C4	C5	C6, C7
FOOTING NOS		FOOTING TYPE	F1	F2	F3	F4	F5

BEAM SCHEDULE: PLINTH LVL.

BEAM	SIZE		BOTTOM BARS		TOP BARS			STIRRUPS			REMARK
	WIDTH	DEPTH	FULL	EXTRA	FULL	LEFT EXTRA	RIGHT EXTRA	S1	S2	S3	
B1	200	600	2 T12		2 T12			8-100	8-150	8-100	
B2	200	600	2 T12	2 T12	2 T12	2 T12	2 T12	8-100	8-150	8-100	
B3	200	600	2 T12	2 T12	2 T12	2 T12	2 T12	8-100	8-150	8-100	
B4-1	200	600	2 T12		2 T12			8-100	8-150	8-100	SUNK 450mm
B4-2	200	600	2 T12		2 T12			8-100	8-150	8-100	
B5	200	600	2 T12	2 T12	2 T12			8-100	8-150	8-100	
B6-1	200	600	2 T12		2 T12			8-100	8-150	8-100	
B6-2	200	600	2 T12		2 T12			8-100	8-150	8-100	
B6-3	200	600	2 T12		2 T12			8-100	8-150	8-100	


BEAM SCHEDULE: ATTIC LEVEL (+592.650 M)


B1	200	400	2 T16	2 T16	2 T16	2 T16	2 T16	10-100	10-150	10-100	INVERTED
B2	250	400	2 T16	2 T16	2 T16	2 T16	2 T16	10-100	10-150	10-100	INVERTED
B3	200	400	2 T16	2 T16	2 T16	2 T16	2 T16	10-100	10-150	10-100	INVERTED
B4	200	400	2 T12	2 T12	2 T12			8-100	8-150	8-100	INVERTED
B5-1	200	400	2 T16	2 T16	2 T16	2 T16	2 T16	10-100	10-150	10-100	INVERTED
B5-2	200	400	2 T12		2 T12			8-100	8-150	8-100	INVERTED


SLAB SCHEDULE - ATTIC SLAB LEVEL (+592.650 M)


TYPE	THICKNESS	TYPE	MAIN BARS	SECONDARY BARS	REMARK
S1	150 mm	ONE WAY	T8 - 150	T8 - 200	
S2	125 mm	CANTILEVER	T8 - 150	T8 - 150	


Note: a.b. means alternate bentup

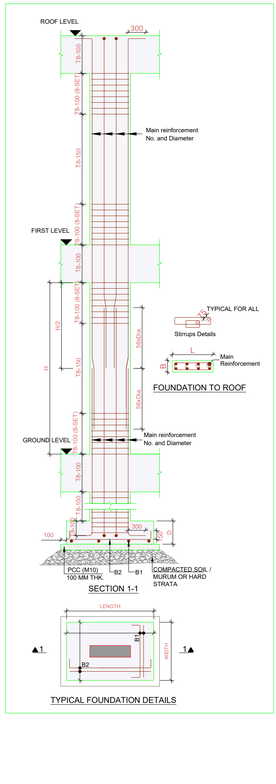


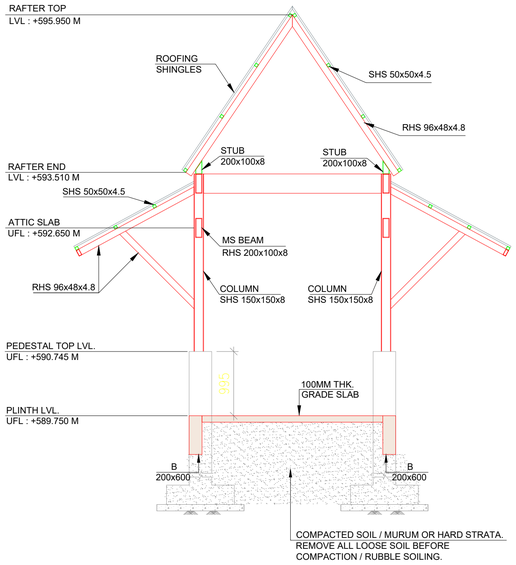


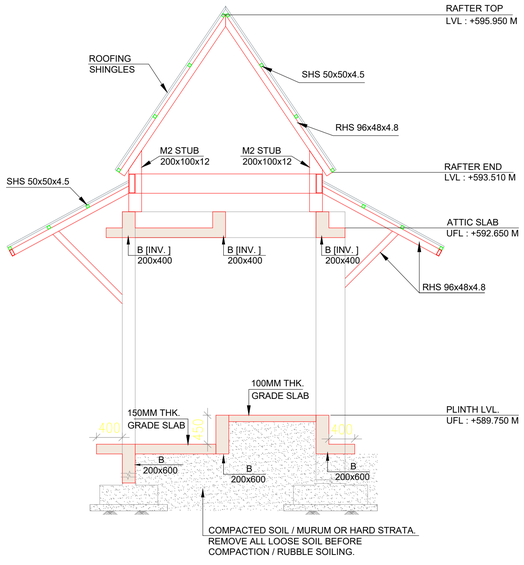














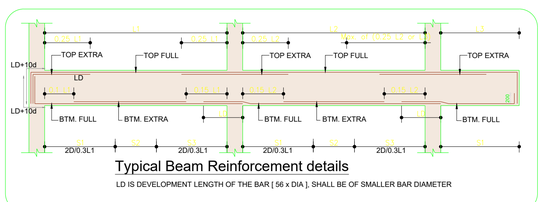



LEGEND

- STRUCTURAL SLAB LEVEL
- CUTOUT
- COLUMN TERMINATE

REV.	DESCRIPTION	DATE

PROPOSED: CLUBHOUSE AT 106-LOHEGAON

UTILITY BUILDING FRAMING PLANS, FOUNDATION, COLUMN & BEAM DETAILS

PROJECT NO.	DRAWING NO.	SCALE	DATE	REVISION
A-2411	A-2411-UTI-001	1:100	17/05/2025	R0

ARCHITECT

CLIENT