



L	W	C	L1	W1
2720	2030	400	2800	2080

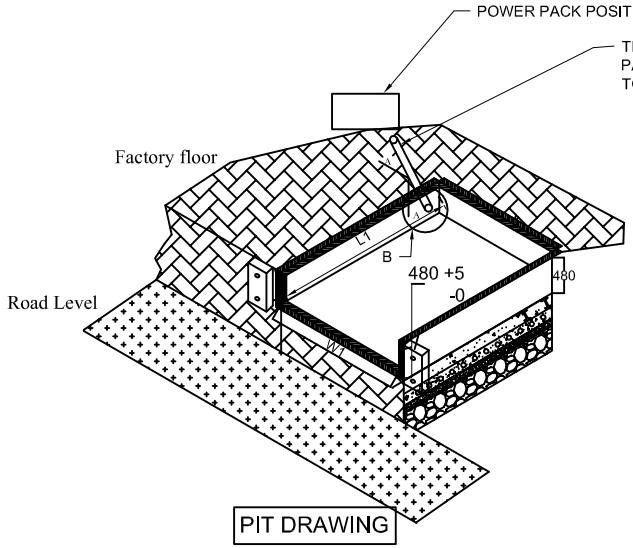


PIT DRAWING





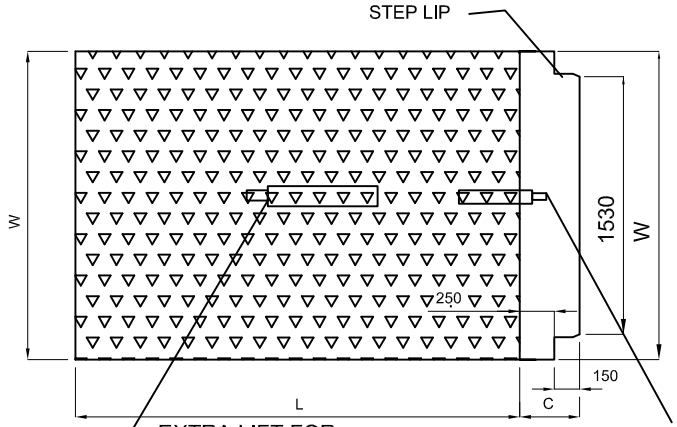

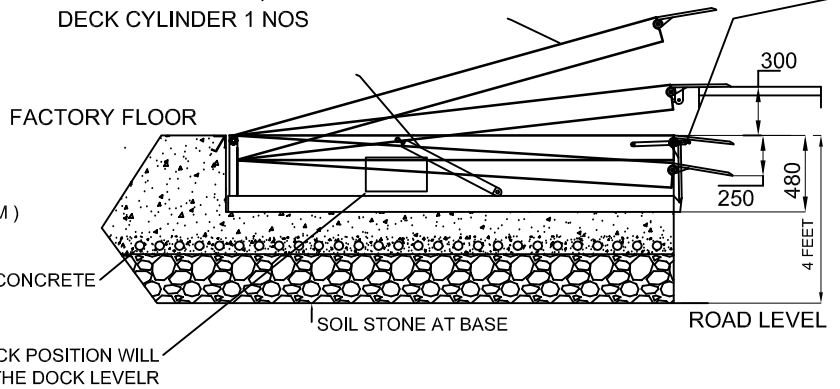

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE +_15 MM

DOCK LEVELER- 9 TON CAPACITY

NIHVA TECHNOLOGY PVT LTD.
www.nihva.com
Email:-info@nihva.com ,sales@nihva.com