NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PROJECT PROPOSAL

NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

Customer Name	**Ts Tech Sun Rajasthan Pvt Ltd**
Project Name	**Pillar mounting manipulator**
Project Location	Rajasthan
Contact Person Name	Mr. Pankaj Khandelwal
Email Id	Pankaj_Khandelwal@tssrindia.com
Contact Number	+91-7891378001

Contact Person: Mr. Ravi Ranjan Prasad
Mob No.: 77095586333
Email id: ravi.prasad@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Project Title: Pillar mounting manipulator


Date: 7/2/2019

Dear Sir,

Thank you for the opportunity and trust shown on “NIHVA” your preferred partner for innovative solutions. This has reference to your above-mentioned requirements as well as our subsequent communication; please find below our best offer.

A. Requirement:
Require process is as below.

Process Flow Chart for manipulator

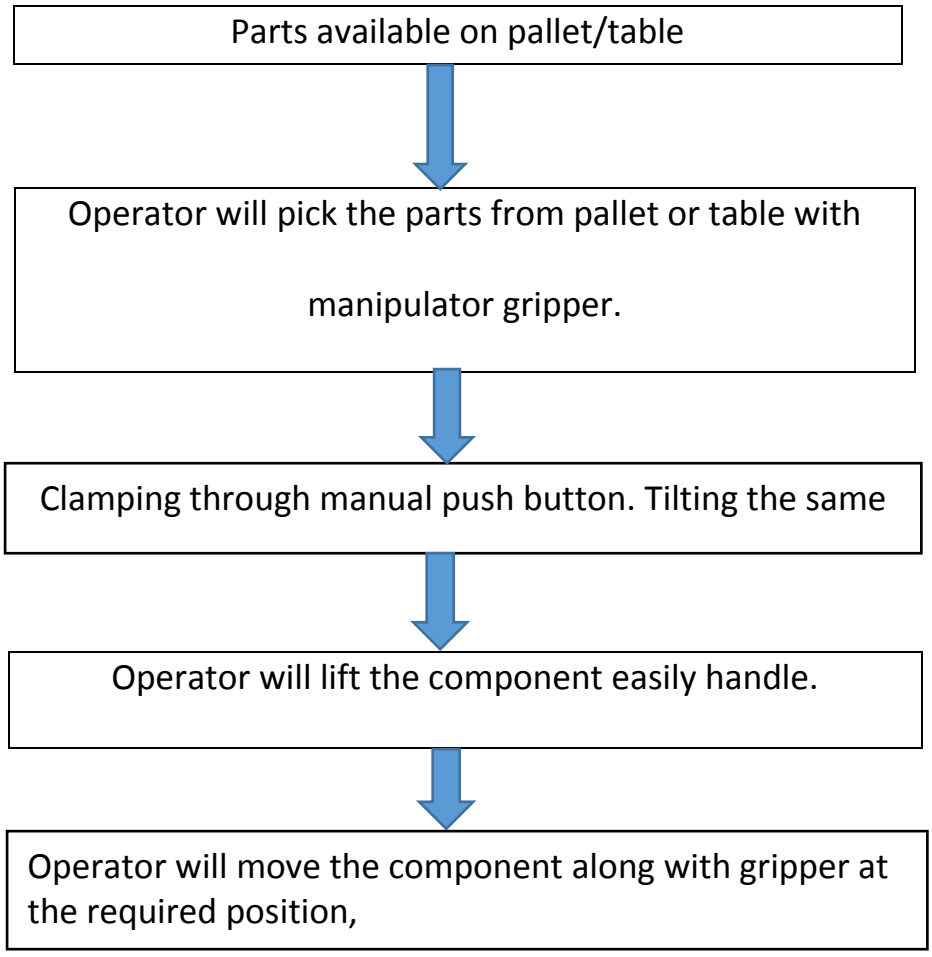

Ensuring primary locating & fixing at the desired position, operator will push de-clamping button.

After de-clamping operator will move the gripper away from the place and will park the system at pre-described parking position.

After parking, operator will perform tightening operation by his normal method.

Content of the system:

. SR NO.	Content
1	Articulated arm type manipulator with zero gravity pneu. Circuit.
2	Pneumatic gripper.
3	Operator with push buttons.
4	Parking brakes for all rotary joints.

Technical Specifications: -

Sr No.		
1	Weight (Kg.) - Capacity	300kg
	• Working radius	Approximately 2.8meters
	• Lifting stroke	800 mm
	• Rotation	around main bearing joint on trolley, secondary rotation joint at horizontal arm, and final vertical gripper arm.
	• Brakes at rotary joint	Brakes actuate in case of loss of air.
2	Safety Features	
	A) In case of loss of air, component will not get released, in case of false operation of release switch, equipment first comes down to find a surface and then de-clamps.	
	B) No sudden jerks in case of sudden pressure rise or fall (or loss of air).	
	C) Component remains in clamped condition though there is a loss of air supply.	

Steel structure, I Beam etc. construction – All the necessary steel construction will be the responsibility of the customer. Foundation for the equipment is considered in scope of the customer. All civil works are exclusions for this offer.

We are proposing all standard make pneumatic elements:

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.



1. Industrial Manipulator

2. Pneumatic Manipulator

Sr no	Description	Qty	Unit	Rate in INR	Net Amount INR
1	Manipulator 100Kg (Supply + Installation)	1	No	12,50,000	12,50,000
				Total Cost	**12,50,000**

GST PUNE: 27AAECN0437H1ZM	**Amount in Words:**
HSN Code: 84289090	Rupees Twelve Lacs Fifty Thousand Only

E. Drawings Training and warranty

- **Drawing:**

We will issue a full set of drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

- **Training:**

After installation of the Manipulator system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

- **Warranty:**

I. The warranty period is twelve months from the date of installation and commissioning.

II. If a defect arises within the warranty period stated, which is attributable to faulty design,

III. materials or installation workmanship the product will be repaired at our discretion without charge.

IV. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

- **Maintenance & Service Agreement:**

  We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request.

  We are pleased to inform that we also undertake AMC for all of our products & for any of your existing facilities.

  Maintenance and service aren't about what you get. They're about what you avoid: failures, losses and unplanned interruptions.

- **Client Scope:**

  1. Unloading from truck placement on site.
  2. Exiting/Repair/ Modification/ Refurbishment charges will be extra.
  3. Steel structure, I Beam and Foundation etc.
  4. The foundations for installation must be dry and the concrete must have hardened.
  5. Any civil work if required will be in client scope

G. Terms and Conditions: -

1. Price	: Ex. Works Pune
2. P & F	: 3 % Extra at the time of delivery.
3. Freight Notes	: Extra as applicable.
4. Delivery	: Within 10- 12 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.
5. Payment Terms	: 80% advance along with confirmed purchase order balance before dispatch.
6. Insurance	: Extra as applicable.
7. GST	: As Applicable on total supply value.
8. Validity	: 15 days from date of quotation.
9.Warranty	: 12 months from date of supply.

Please feel free to contact Mr. Ravi Ranjan Prasad on 77095586333 for any further clarification in this concern.

With Best Regards,
Ulka Auti
For NIHVA Technologies Pvt Ltd