NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Pragati Infra
Gurugram, Haryana

Date : 09.12.2019
Quote NO : SQT.19.20.2154A
Kind Attn : Mr. Sumit
Email Id : planning@pragatinfra.com
Contact No: **8816968069**

Project Name & Location: Amazon,Banglore

Subject : Quotation for Dock Leveller, Boom Barrier, Rolling Shutter & Bumpers.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2 ,3 & 4
C.	General Conditions	5
D.	Terms & Condtions	5

A) Commercial Offer

Sr No	Description	Size		Qty	Supply + Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unite Price	Total Amount
1	NIHVA Make Dock Leveller Capacity 9 T	2000	3000	70	2,10,000	1,47,00,000
2	Boom Barrier	-	6000	16	90,000	14,40,000
3	MS Motorised Rolling Shutter	2400	3000	100	87,000	87,00,000
4	MS Motorised Rolling Shutter	4000	5000	4	1,61,000	6,44,000
5	Motorised Single Leaf Sliding Gate	10000	2500	1	4,95,000	4,95,000
				Total		**2,59,79,000**
6			P&F Charges	3%		**7,79,370**
			Total Without Taxes			**2,67,58,370**
			GST Extra @ 18%	18%		48,16,506.60
			Total With Taxes			**3,15,74,877**
7			Transportation Charges			**In Client Scope**
8			Unloading Charges @ Site			**In Client Scope**


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

1. Dock Leveler

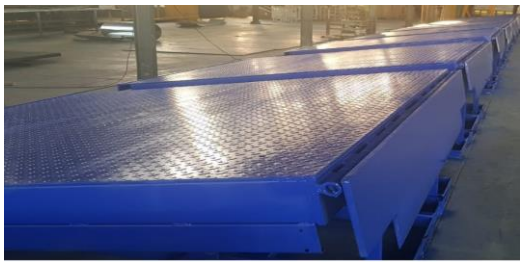



Sr. No.	Description	Specifications
1	Dock Leveler	Size 2000(W) X 3000 (L)
2	Capacity	9Ton
3	Dock operation mode	AC power pack hydraulically operated
4	Lip operation mode	Hydraulic
5	Operation control	Through panel
6	Loading platform height from road	1250mm
7	Travel above & below dock level	(+) 300 / (-) 250 mm
8	Platform Size (W x L)	2000 mm x 3000 mm
9	Lip size (W x L)	2000 x 400 mm
10	Shut Height	480 mm
11	Overall length	2000mm x 3000mm + Lip Length (400mm)
12	Maximum slope can be achieved	10%
13	Clear Pit dimensions (W x L x D)	(W) 2050mm x (L) 3050 mm x (D)485 mm
14	Hydraulic power pack	Standard
15	Driver type	Direct by electric Motor
16	Motor Ratings	1 H.P
17	Pump design flow	2.5 LPM
18	Pump pressure	120 bar Operating 200 bar Max.
19	Safety valve set pressure	120 Kg/cm²
20	Pump Type	Gear
21	Volume of oil receiver	7 Lit
22	No Of Deck cylinder	2 No
23	Lip Cylinder	1 No
24	Dock Bumper	Pair of Dock Bumper

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

2. Boom Barrier





Sr. No.	Description	Specifications
1	Size	6 Mtr
2	Model No	Michealangelo 60
3	MICHELANGELO BT A Barrier	Opening Time- 6S
4	Motor Power Supply	24V
5	Type of limit Switch	Electronic
6	Frequency of Use	Continous Use
7	Protection Rating	IP24
8	Operated	Push Button Pedant

3. Motorised Rolling Shutter





Sr. No.	Description	Specification
1	Rolling Shutter	Motorised Rolling Shutter with MS Laths with thickness of 1 mm.
2	Mounting Location area	Inside area / Outside area
3	Curtain Panel	The panel made of 1.0mm thick MS.
4	Curtain panel size	75mm wide
5	Curtain Profile	Curved
6	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
7	Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
8	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Dia -100 to 300 mm as per w x h
9	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
10	Hood Cover	Made of MS Sheet Thickness 0.9 mm with 25x25x3mm angle stiffener
11	Surface finish	PU paint or Powder coated
12	Drive Unit & Mounting Type	Indirect Drive Electric Motor
13	Bumpers	Included

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

4. Motorised Sliding Gate





Sr. No.	Description	Specifications
1	Door type	Motorised Single Leaf Sliding Gate
2	Clear Opening gate dimension	(W) 10000 mm X (H) 2500 mm
3	Opening Direction	Horizontal - from left to right or reverse
4	Design Pattern	Standard Tubular Design Pattern
5	Outer Frame Tube Sizes	80 x 80 x 3.2 mm
6	Internal Vertical Tube Sizes	38 x 38 x 3.2 mm
7	Gap Between Tubes	125 mm C/C
8	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
9	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
10	Guide Rollers supporter during Gate movement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
11	Painting	Powder Coating
12	Metal Rack	Zinc plated metal rack

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 5 - 6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Arjun Patil on 8551096333**

With Best Regards
Vivek
8530370333
For NIHVA Technologies Pvt Ltd