



LOCATION - MEDICAL AREA 01(MAIN HOSPITAL)

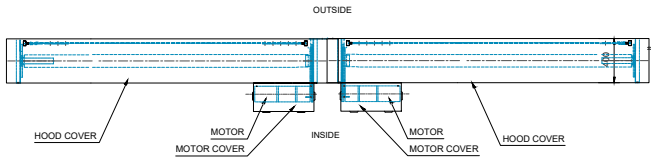



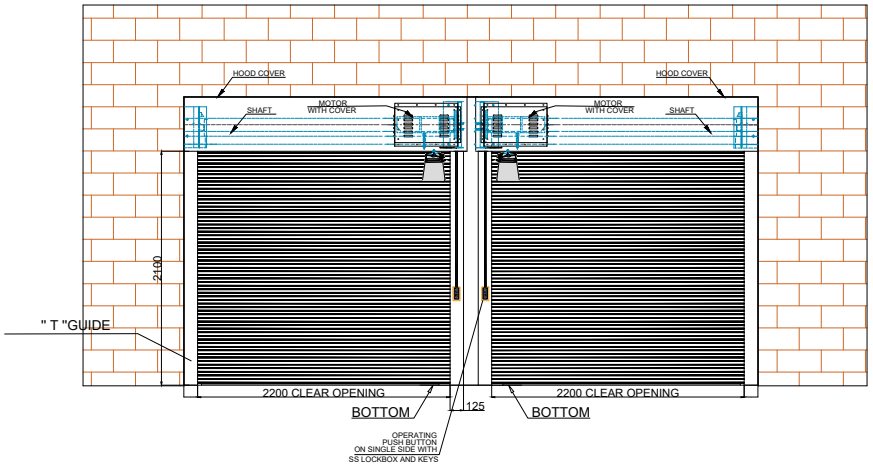

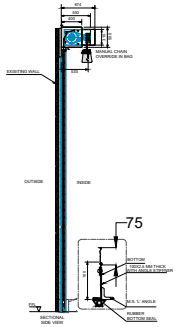

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GI SLAT- 1MM THICK (75 MM WIDTH)
5.	BOTTOM PROFILE	MS PLATE100 x 2.5 MM THICK WITH ANGLE STIFFENER.
6.	GUIDE PROFILE	M.S.* T * SHAPED PROFILE 125X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF MS SHEET THICKNESS 0.9 MM.
8.	SURFACE FINISH	SYNTHETIC ENAMEL PAINT
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

REV 1 (04/02/2026) -
1) MOTOR POSITION CHANGE
2) WIDTH AND HEIGHT CHANGE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	2200 mm	2100 mm	02

NOTE :-
1. All DIMENSIONS ARE IN MM.
2. REQUIRED STEEL STRUCTURE IN CLIENT SCOPE.
3. HIGH LEX BOARD / INTERIOR SHEET/ PUFF PANEL REMOVER OR CUTTING IN CLIENT SCOPE

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD, PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	B.S.	04/02/2026
CHECK & APPROVAL	V.T.	04/02/2026

CLIENT - KLE Hospital
PROJECT - MOTORISED ROLLING SHUTTER
FORMAT NO - NIHVA-DD-F-03
DWG. NO. : NIHVA/24-25/MP/1308001 REV-01
SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm
If any queries contact : design@nihva.com