GENERAL NOTES

A. CONSTRUCTION NOTES:

1. CONSTRUCTION NOTES AND TYPICAL DETAILS APPLY TO ALL DRAWINGS UNLESS OTHERWISE SHOWN OR NOTED MODIFY TYPICAL DETAILS AS DIRECTED TO MEET SPECIAL CONDITIONS.
2. ALL DIMENSIONS ARE IN MILLIMETERS; LEVELS ARE IN METERS; UNLESS STATED OTHERWISE.
3. DRAWING SHOULD NOT BE SCALED; FOLLOW WRITTEN DIMENSIONS ONLY.
4. THIS DRAWING IS TO BE READ WITH RELEVANT ARCHITECTURAL, MECHANICAL & ELECTRICAL DRAWINGS.
5. CONTRACTOR SHALL VERIFY ALL DIMENSIONS BEFORE ALL WORK BEGIN. [CHECK WITH MECHANICAL AND ELECTRICAL CONTRACTORS FOR CONDUITS PIPE SLEEVES, ETC., TO BE EMBEDDED IN CONCRETE.]
6. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ADEQUATE SHORING & BRACING OF THE STRUCTURE FOR ALL LOADS THAT MAYBE IMPOSED DURING CONSTRUCTION.
7. ALL TEMPORARY WORKS TO BE APPROVED BY THE CONSULTANT.
8. CONTRACTOR SHALL SUBMIT FOR APPROVAL CLEAR METHOD OF STATEMENT, SHOP DRAWINGS, BAR BENDING SCHEDULE; IF ANY, BEFORE STARTING RELEVANT ACTIVITIES.

B. CONCRETE & REINFORCEMENT:

1. ALL CONCRETE SHALL BE MADE OF OPC (U.N.O.) & DEVELOP A MINIMUM CRUSHING CUBIC STRENGTH (Fcu) AT THE END OF TWENTY–EIGHT (28) DAYS WITH CORRESPONDING MAXIMUM SIZE AGGREGATE AND SLUMP AS FOLLOWS;

LOCATION	GRADE	GABRO AGGREGATE MAX. SIZE	SILICA FUME	GGBS	OPS/ SRC
1. BLINDING/ SCREED	C 16/20	10 mm			SRC
2. COLUMN	C 40	20 mm	10%	50%	OPC
3. SLAB	C 40	20 mm			OPC

2. FOR ALL THE ABOVE THE AGGREGATES SHALL HAVE THE FOLLOWING:
   AGGREGATE SIZE (MAXIMUM) ----- 20 mm /10 mm
   CONCRETE–WATER RATIO (MAXIMUM) ----- 0.50
   THE CONCRETE MIX DESIGN TO BE APPROVED AND ITS CEMENT CONTENT TO SUIT THE TYPE OF ADMIXTURE UNLESS OTHERWISE SPECIFIED. (I.E. MICRO SILICA, P.F.A ETC.)
3. ALL CONCRETE BELOW GROUND LEVEL AND IN CONTACT WITH SOIL INCLUDING ALL PLANTER BOXES AND GROUND SLABS EXPOSED TO THE ELEMENTS SHALL BE TANKED AS SPECS & DRAWINGS.
4. ALL REINFORCING BARS SHALL BE DEFORMED HIGH STRENGTH AND SHALL CONFORM TO "BS4449" STEEL GRADE "500B" WITH MINIMUM YIELD STRENGTH ----- 500N/mm²
5. MAINTAIN CONCRETE COVER FOR REINFORCING STEEL BARS AS FOLLOWS;
   SLAB – 25MM
6. SPLICES SHALL BE SECURELY WIRED TOGETHER & STAGGERED WHENEVER POSSIBLE .
7. ALL ANCHOR BOLTS, DOWELS, AND OTHER INSERTS, SHALL BE PROPERLY POSITIONED & SECURED IN PLACE PRIOR TO PLACING OF CONCRETE.
8. CONTRACTOR SHALL NOTE AND PROVIDE ALL MISCELLANEOUS CURBS, SILLS, STOOLS, EQUIPMENT AND MECHANICAL BASES THAT ARE REQUIRED BY THE ARCHITECTURAL, ELECTRICAL, AND MECHANICAL DRAWINGS.
9. ALL CONCRETE SHALL BE KEPT MOIST FOR A MINIMUM OF SEVEN CONSECUTIVE DAYS IMMEDIATELY AFTER POURING BY THE USE OF WET BURLAP, FOG SPRAYING OR OTHER APPROVED METHODS.
10. MINIMUM REINFORCEMENT LAP SPLICE SHALL BE AS FOLLOW U.N.O. IN THE DRAWINGS.
    WALLS/COLUMNS= 50 X BAR DIAMETER.
    BEAMS= 50 X BAR DIAMETER.
    SLABS & RAFT = 50 X BAR DIAMETER.
11. REINFORCEMENT BARS FOR SLAB SHOWN AS TWO–LAYERS ARE JUST FOR CLEAR REPRESENTATION, TWO–LAYERS IN SLAB IS NOT ALLOWED U.N.O.

E. ABBREVIATIONS:

1. ALT.	---	ALTERNATELY	15. ELEV	---	ELEVATION
2. C/C	---	CENTER TO CENTER	16. SECT	---	SECTION
3. CONT	---	CONTINUOUS	17. DET.	---	DETAIL
4. EF	---	EACH FACE	18. NTS	---	NOT TO SCALE
5. EW	---	EACHWAY	19. EXP JT./EJ	---	EXPANSION JOINT
6. OC	---	ON CENTER	20. CJ	---	CONSTRUCTION JOINT
7. STAG	---	STAGGERED	21. WB	---	WATER BAR
8. SSL	---	STRUCTURAL SLAB LEVEL	22. BSMT	---	BASEMENT
9. TOS	---	TOP OF STEEL	23. GRD.	---	GROUND
10. RC	---	REINFORCED CONCRETE	24. T.O.C.	---	TOP OF CONCRETE
11. REINF.	---	REINFORCEMENT	25. T.O.B.	---	TOP OF BEAM
12. TB/T:	---	TOP BAR	26. IB	---	INVERTED BEAM
13. BB/B:	---	BOTTOM BAR	27. IRB	---	INVERTED RAMP BEAM
14. M.H.	---	MANHOLE	28. RB	---	RAMP BEAM
			29. U.N.O.	---	UNLESS NOTED OTHERWISE

F. SYMBOLS:

1. ---- STEP–IN LEVEL
2. SSL +0.10 ---- STRUCTURAL SLAB ELEVATION
3. SSL +0.10 SLAB THICKNESS ---- STRUCTURAL SLAB ELEVATION (ELEVATION/ SECTION)
4. ---- SLAB THICKNESS
5. ---- TOP BAR REINFORCEMENT
6. ---- BOTTOM BAR REINFORCEMENT
7. ---- EARTH/ GROUND
8. ---- COLUMN AND WALL
9. ---- TERMINATED COLUMN
9. ---- PLANTED COLUMN
10. ---- COLUMN DROP PANEL
11. ---- CONCRETE BEAM
12. ---- SQUARE MESH (SLAB REINFORCEMENT)
13. E.L. +0.10 ---- EXCAVATION LIMIT (ELEVATION/ SECTION)

G. DESIGN CODES

1. QCS 2014 – QATAR CONSTRUCTION SPECIFICATIONS
2. ACI 318: "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE," 2014, BY THE AMERICAN CONCRETE INSTITUTE
3. ASCE 7: "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURE, CHAPTER 6 WIND LOADS" 2005, BY AMERICAN SOCIETY OF CIVIL ENGINEERS.
3. ASCE 360: AMERICAN INSTITUTE OF CIVIL ENGINEERS

I. STEEL STRUCTURE

- ALL STRUCTURAL STEEL MEMBER SHALL BE S355 U.N.O.
- ALL STRUCTURAL STEEL PLATE SHALL BE S355
- ALL STRUCTURAL BOLT SHALL BE GRADE 8.8 (U.N.O.)
- E70XX WELDING ELECTRODES SHALL BE USED.(U.N.O.)

1. THE STEEL FABRICATOR SHALL HAVE THE WELDS TESTED BY MPI METHOD OR ANOTHER APPROVED METHOD BY INDEPENDENT COMPANY ENGAGED IN NON–DESTRUCTIVE TESTING AS DIRECTED BY STRUCTURAL ENGINEER. THE WELDS ARE CONSIDERED SATISFACTORY IF NINE (9) OUT OF 10 SAMPLES PASSED THE REQUIREMENT, OTHERWISE THE WELDS SHALL BE CORRECTED.

2. ALL STEEL TO STEEL CONNECTION INCLUDING ANCHORAGE TO BE DEVELOPED & VERIFIED BY STEEL CONTRACTOR SPECIALIST. THE PROVIDED DETAILS ARE INDICATIVE

J. STEEL PROTECTION SYSYTEM / FIREPROOFING:

STEEL PROTECTION SYSTEM SHALL BE AS FOLLOWS:


1. STEELS WITH HEIGHT LESS THAN 6m,
   a.) BLAST CLEAN TO SWEDISH STANDARD SA 2 1/2
   b.) APPLY 1 LAYER, 2 PACK EPOXY PRIMER 70 MICRON DRY FILM THICKNESS (MIN.)
   c.) INTUMESCENT PAINT FIREPROOFING RATED 2.5 HOURS

2. STEELS WITH HEIGHT ABOVE 6m.
   a.) BLAST CLEAN TO SWEDISH STANDARD SA 2 1/2
   b.) APPLY 1 LAYER, 2 PACK EPOXY PRIMER 70 MICRON DRY FILM THICKNESS (MIN.)
   c.) APPLY 1 LAYER, 2 PACK EPOXY UNDERCOAT 100 MICRON DRY FILM THICKNESS (MIN.)
   d.) APPLY 1 LAYER, 2 PACK EPOXY TOP COAT 50 MICRON DRY FILM THICKNESS
   e.) THE TOTAL DRY FILM THICKNESS SHALL NOT BE LESS THAN 200 MICRON.

NOTES

- ☐ ALL DIMENSION IN MM.
- ☐ DO NOT SCALE FROM DRAWING.
- ☐ THIS DRAWING TO BE READ IN CONJUNCTION WITH RELEVANT ARCH. STRUCTURAL & MEP. DETAIL AND SPECIFICATIONS. CONTRACTOR SHALL COORDINATE THESE DWG. WITH SITE CONDITION AND REPORT IF ANY DISCREPANCY FOR CLARIFICATION BEFORE PROCEEDING WITH THE WORK.
- ☐ ALL MATERIAL TO BE APPROVED BY ARCHITECT/ ENGINEER.
- ☐ CONTRACTOR SHOULD SUBMIT THE SHOP DRAWING FOR APPROVAL.

KEY PLAN

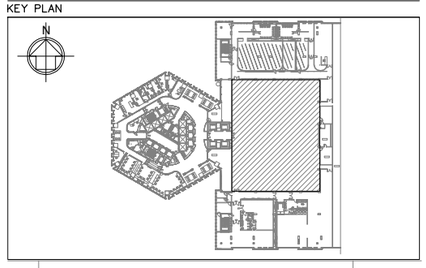

REV	DESCRIPTION	DATE
00	ISSUED FOR TENDER	12-APR-2026

REVISIONS

THIS DRAWING IS THE PROPERTY OF DSG AND SHALL NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF DSG.

QR-Code

MUNICIPALITY STAMP

PREVIOUS BP No. : 83174		Application No : M/2023/0001159	
CONSULTANT REG. No : M/42	GRADE : A	CONSULTANT REG. No : 000000	GRADE : A
CONSULTANT STAMP & SIGNATURE :		SUB-CONSULTANT STAMP & SIGNATURE :	
TECHNIQAL MANAGER : N. JARROUJ		TECHNIQAL MANAGER	XXXX
REGISTRATION No. : 1195-A		REGISTRATION No :	XXXX

CONSULTANT

EGEC – QATAR
ENGINEERING CONSULTATION
P. O. Box: 21666 - Doha - Qatar
Tel.: +974 44643135 Fax: 44653562
www.egec-xprt.com

CONSULTANT

dsg ARCHITECTURAL INT DESIGN STRUCTURAL ELECT MECH SUPERVISION MANAGEMENT
TEL +974 44521666 FAX +974 44383812 P.O. BOX 5785 W L L
Email: info@mzsandpartners.com www.mzsandpartners.com
MZP WLL

CLIENT/DEVELOPER

QATAR ENERGY LNG

PROJECT

QATAR GAS HEADQUARTERS
(10TH FLOOR)
FIT-OUT AND ENHANCEMENT WORKS PROJECT

LOCATION: DOHA, QATAR | PIN NO.: -

SHEET TITLE

GENERAL NOTES AND LEGEND

Project No. GP-25256	Discipline S	Date APRIL 2026	Scale AS SHOWN	Stage IFT	Format A1
		Drawn DT	Checked FH	Approved FMI	
Originator DSG	Drawing No. ST-0100				Rev.No. 00

THIS DRAWING MUST NOT BE USED FOR CONSTRUCTION UNLESS STAMPED AND SIGNED ISSUED FOR CONSTRUCTION AS APPROVED.