



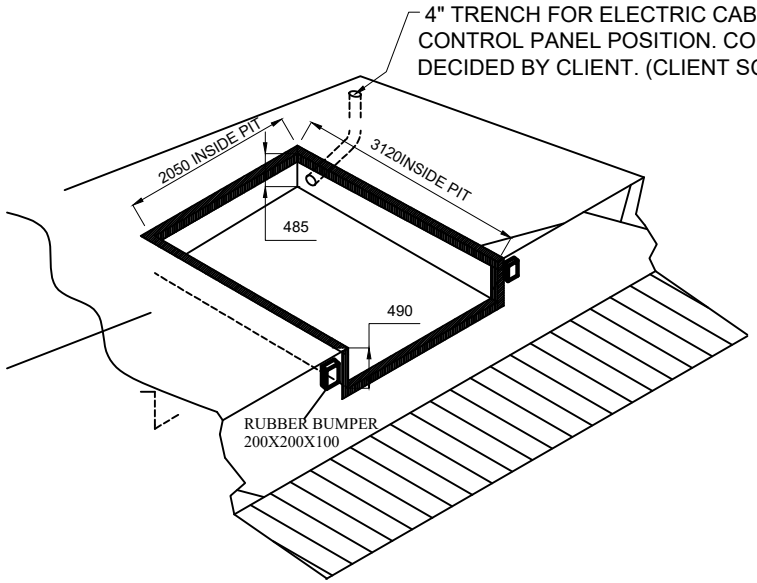


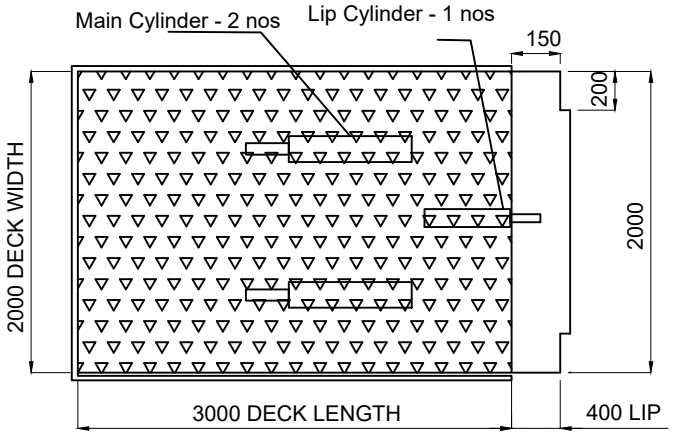


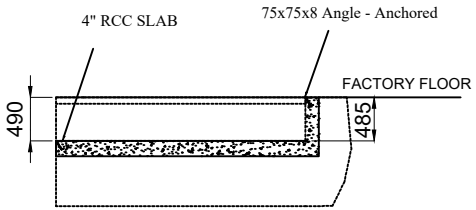

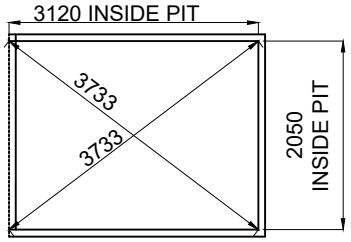

VIEW B

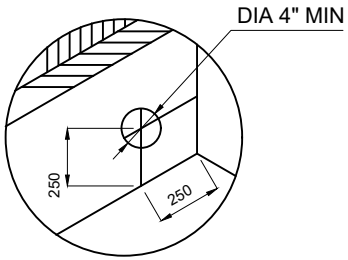

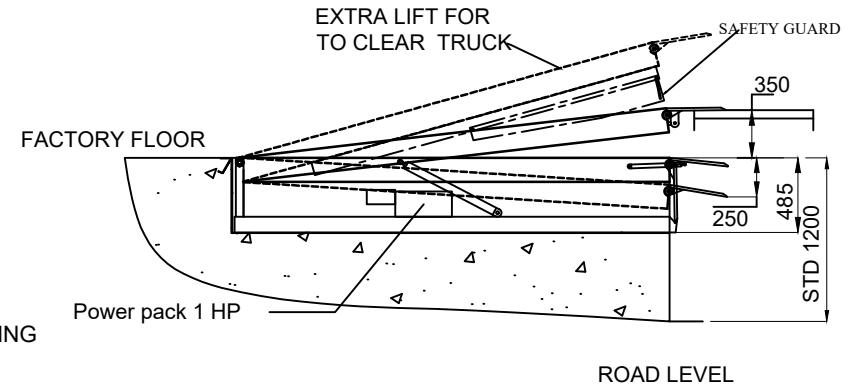

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE CONTROL PANEL POSITION
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM
5. PIT,DUCT FOR HOSES & ALL CIVIL WORK IN CLIENT SCOPE

SPECIFICATION OF DOCK LEVELER:
1. PLATFORM SIZE- 2000W X 3000L
2. LIFT ABOVE- 350 MM
3. LIFT DOWN- 250 MM
4. PIT SIZE- 2050W X 3120L X 485D
5. CAPACITY 6 TON
6. FINISH- HOT DEEP GALVANISING
7. QTY- TOTAL 4 NOS OF DOCK LEVELER (2NOS FOR PHASE 1 & 2 NOS FOR PHASE 2)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER			NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	S.B.	05-10-2021	CLIENT -
CHECK	G.P.	05-10-2021	PROJECT -
APPROVAL	A.K.	05-10-2021	SITE -
			DWG. NO. : NIHVA/21-22/VDR/0147
If any queries contact : design@nihva.com			SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com