

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2030	2720	480	400

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2080	2800	485	

Section at A-A




75x75x6 Angle - Anchored

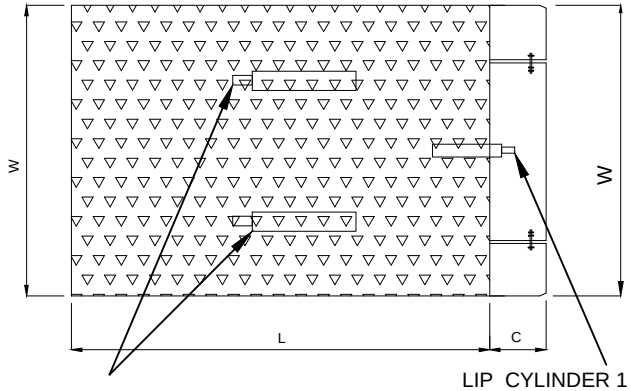


DECK CYLINDER 2 NOS


LIP CYLINDER 1 NOS

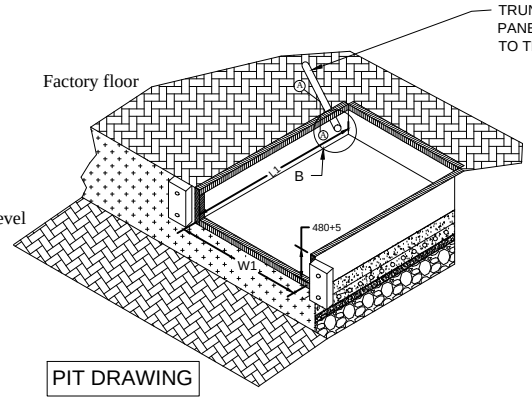

PIT DRAWING

VIEW B



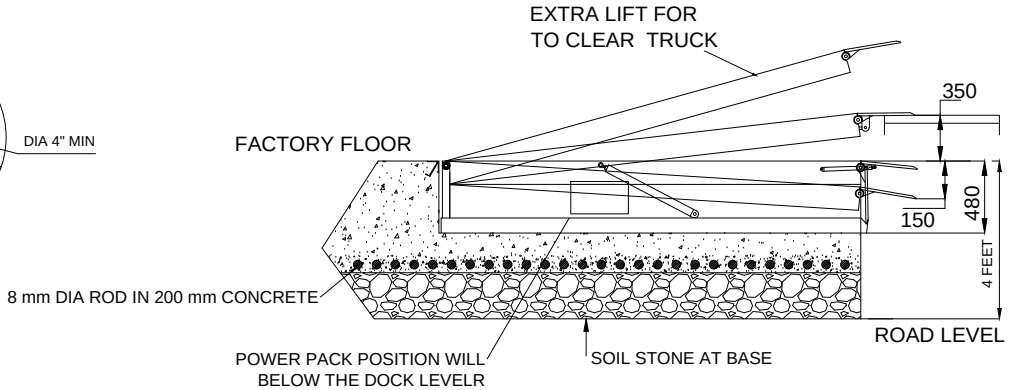

NOTE:-

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

DOCK LEVELER- 5 TON CAPACITY

CLIENT APPORVAL-	DATE	SIGN.
DRAWN :- OMKAR	11/10/2017	
CHECKED :- SHEKHAR	11/10/2017	
APPROVED :- SHEKHAR	11/10/2017	
ALL DIMENSION ARE IN mm		
If any queries contact : projects@nihva.com		

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -CUSHMAN & WAKEFIELD

PROJECT - ARI ARMMATUREN SETAMLINE LLP

SITE LOCATION -PHULGAON,PUNE.

DWG. NO. - NIHVA/17-18/0238